

Evaluating the ADCA5190 5 MHz to 1800 MHz Broadband CATV Amplifier

FEATURES

- ▶ 2-layer evaluation board with heat sink
- ▶ 75 Ω N-type RF male connectors

EVALUATION KIT CONTENTS

- ▶ ADCA5190-EVALZ evaluation board

EQUIPMENT NEEDED

- ▶ RF signal generator
- ▶ RF spectrum analyzer
- ▶ DOCSIS signal generator
- ▶ DOCSIS signal analyzer
- ▶ RF network analyzer
- ▶ 8 V, 500 mA power supply

GENERAL DESCRIPTION

The ADCA5190-EVALZ evaluation board consists of a 2-layer printed circuit board (PCB) fabricated from a 62 mil laminate mounted to an aluminum heat sink. The heat sink assists in providing thermal relief to the device as well as mechanical support to the PCB. Mounting holes on the heat sink allow attachment to larger heat sinks for improved thermal management.

ADCA5190-EVALZ PHOTOGRAPH (TOP SIDE)

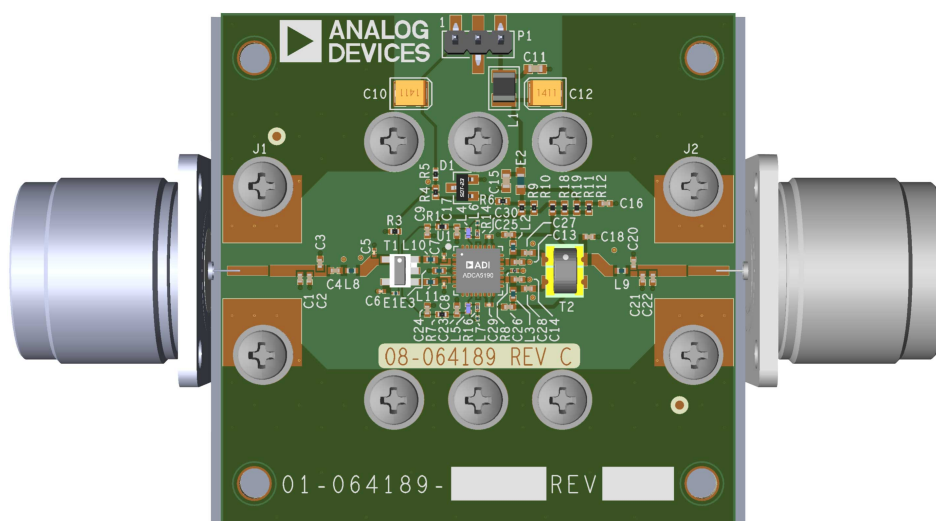


Figure 1. ADCA5190-EVALZ Photograph (Top Side)

The ADCA5190-EVALZ is populated with components to interface the IC to a typical cable TV (CATV) application. J1 (RF_IN) and J2 (RF_OUT) are 75 Ω , N-type, male coaxial connectors. The respective RF traces of the ports have a 75 Ω characteristic impedance. The ADCA5190-EVALZ is populated with components suitable for use over the -40°C to $+100^{\circ}\text{C}$ operating temperature range of the ADCA5190.

Access to the supply voltage (VDD) and GND is through a 3-pin header (P1) on the ADCA5190-EVALZ.

RF traces are 75 Ω microstrip at the input and output RF connectors. The package ground leads and the exposed paddle connect directly to the ground plane. Multiple vias connect the lead frame chip scale package (LFCSP) ground paddle to the bottom ground plane to provide adequate electrical conduction and thermal conduction to the heat sink. The transfer of heat from the ADCA5190-EVALZ ground to the heat sink is further facilitated by the insertion of a piece of indium approximately the footprint of the LFCSP between the ADCA5190-EVALZ bottom and the heat sink. There are no components on the bottom side of the PCB.

Consult the ADCA5190 data sheet in conjunction with this user guide when using the ADCA5190-EVALZ evaluation board.

TABLE OF CONTENTS

Features.....	1	Evaluation Board Schematic and Assembly	
Evaluation Kit Contents.....	1	Drawings.....	4
Equipment Needed.....	1	ADCA5190-EVALZ Assembly Information.....	6
General Description.....	1	Ordering Information.....	7
ADCA5190-EVALZ Photograph (Top Side).....	1	Bill of Materials.....	7
Operating the ADCA5190-EVALZ.....	3	Notes.....	8
Recommended Bias Sequences.....	3		

REVISION HISTORY

7/2022—Revision 0: Initial Version



OPERATING THE ADCA5190-EVALZ

An 8 V, 500 mA power supply is required to provide the bias to the ADCA5190 on the ADCA5190-EVALZ. Connect the positive terminal of the 8 V power supply to the VDD pin on P1 and the ground terminal to the GND pin.

The bias current (I_{DD}) of the ADCA5190 can be controlled by adjusting the voltage of the V_{ADJ} pin on connector P1. Figure 2 shows the typical I_{DD} vs. V_{ADJ} voltage. Setting V_{ADJ} is optional, and the pin can be left floating. If V_{ADJ} is left floating, see the ADCA5190 data sheet for the typical dc supply current to expect when powering up the V_{DD} supply.

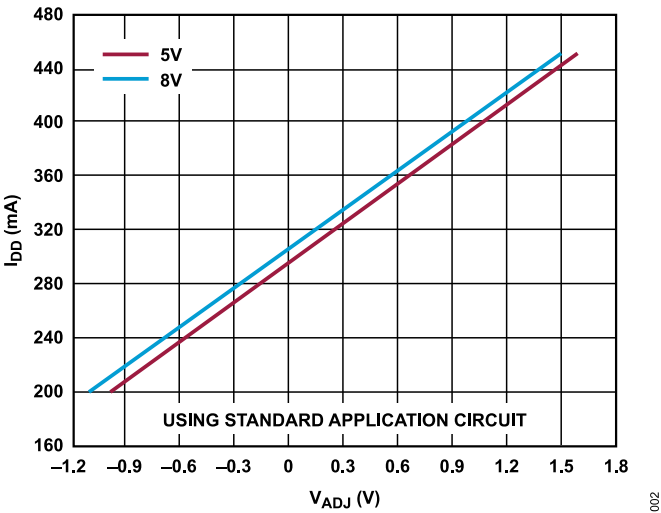


Figure 2. I_{DD} vs. V_{ADJ}

RECOMMENDED BIAS SEQUENCES

During Power-Up

The recommended bias sequence during power-up follows:

1. Set V_{ADJ} to ≤ 0 V to limit I_{DD} at power-up. Note that V_{ADJ} is optional and can be left floating to have the typical I_{DD} .
2. Set V_{DD} to 8.0 V.
3. Increase the V_{ADJ} setting as needed to adjust I_{DD} to the desired level. See Figure 2.
4. Apply the RF signal.

During Power-Down

The recommended bias sequence during power-down follows:

1. Turn off the RF signal.
2. Set V_{ADJ} to 0 V.
3. Set V_{DD} to 0 V.

Table 1. Header Connections

Connector	Header Pin	ADCA5190 Pin
P1	1	V_{ADJ}
	2	GND
	3	V_{DD}

RF Measurements

To evaluate the ADCA5190, connect a 75 Ω RF signal source to the N-type, male connector (J1), which can be a single-tone or multitone source for distortion measurements, or a wideband data over cable service interface specification (DOCSIS) signal source for analyzing modulation error ratio (MER) or bit error rate (BER) measurements. The input power must be <51 dBmV to produce an output power of <70 dBmV to support DOCSIS 3.0, DOCSIS 3.1, and DOCSIS 4.0 applications. The 75 Ω RF output signal is available on the N-type, male connector (J2) and can be interfaced directly to instruments (such as a spectrum analyzer or vector network analyzer) with a 75 Ω input impedance.

EVALUATION BOARD SCHEMATIC AND ASSEMBLY DRAWINGS

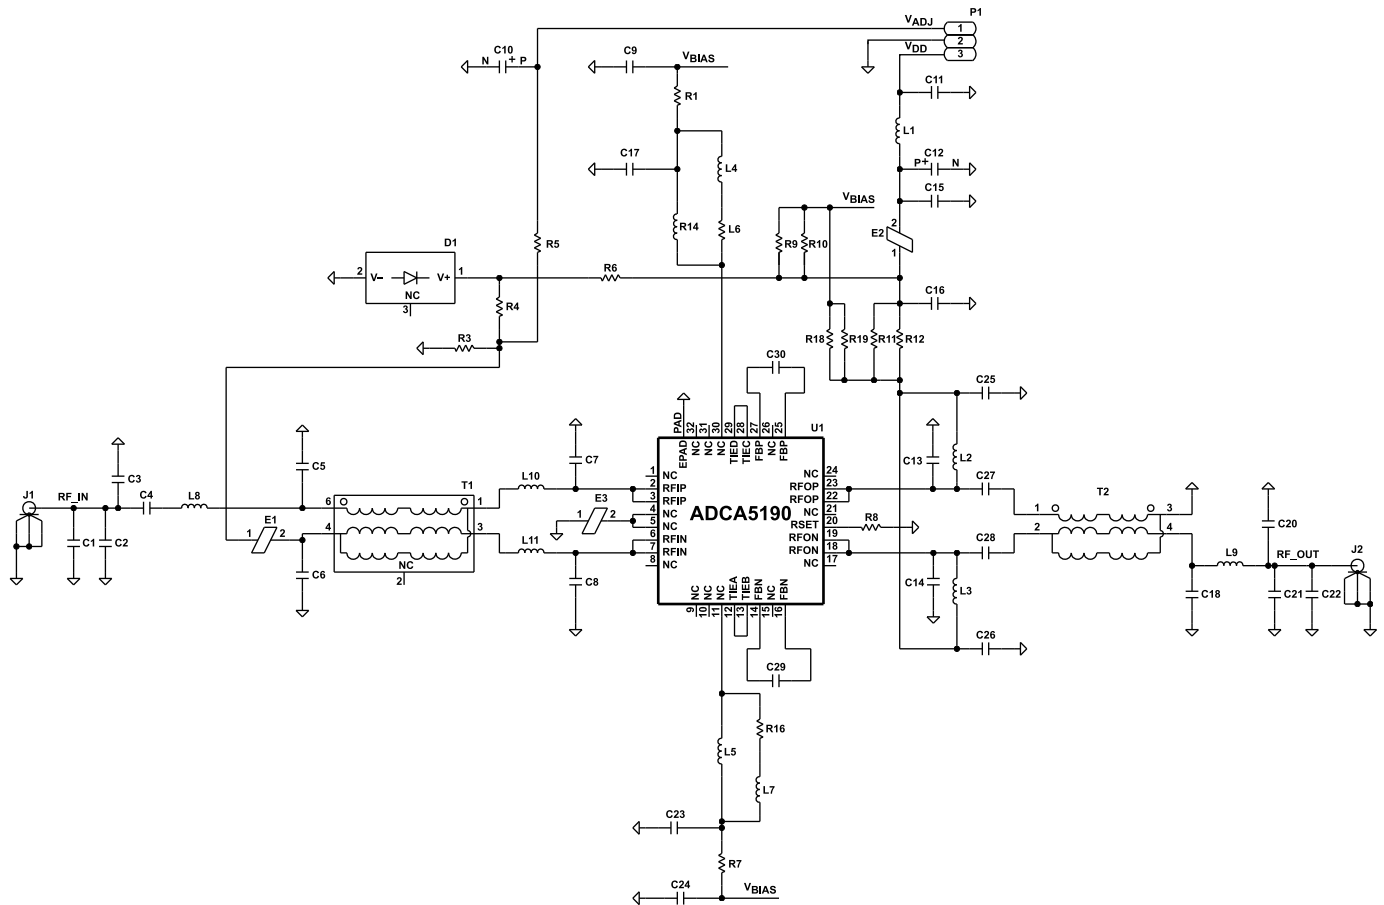


Figure 3. ADCA5190-EVALZ Evaluation Board Schematic

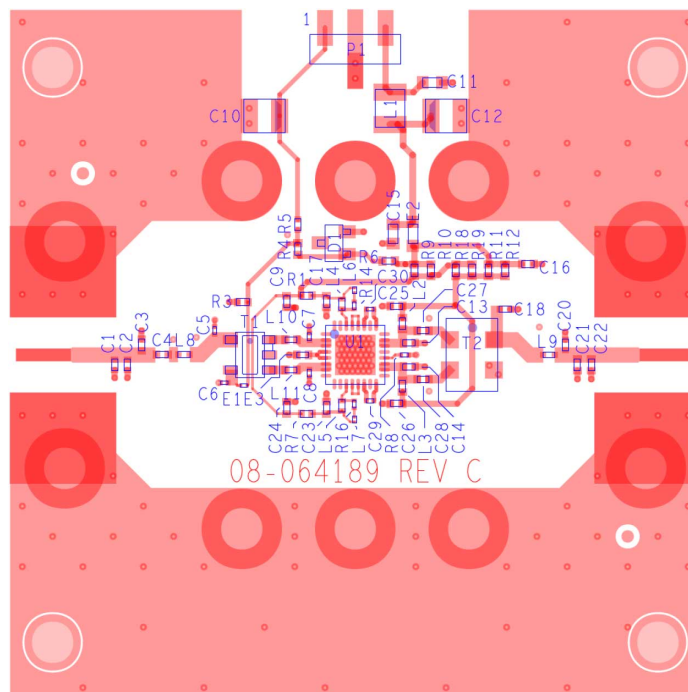


Figure 4. ADCA5190-EVALZ Assembly Drawing (Top Side)

EVALUATION BOARD SCHEMATIC AND ASSEMBLY DRAWINGS

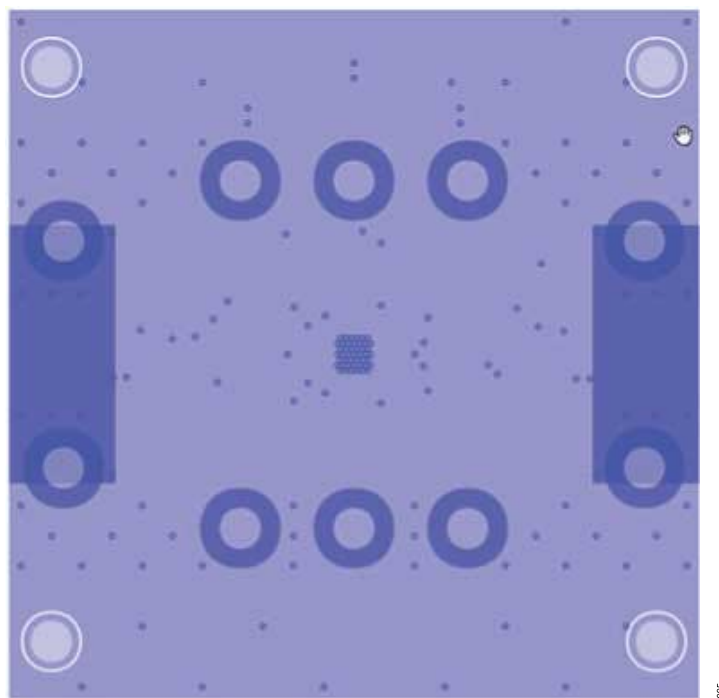


Figure 5. ADCA5190-EVALZ Assembly Drawing (Bottom Side, No Components)

EVALUATION BOARD SCHEMATIC AND ASSEMBLY DRAWINGS

ADCA5190-EVALZ ASSEMBLY INFORMATION

The PCB for the ADCA5190-EVALZ is assembled using normal manufacturing practices, excluding the J1 and J2 connectors, and the custom external aluminum heat sink. Once the PCB is assembled, it is mounted with 10 screws to the external heat sink as shown in Figure 6. The transfer of heat from the ADCA5190-EVALZ ground to the heat sink is enhanced by the insertion of a thin

sheet of indium cut to approximately the footprint of the ADCA5190 and located between the via array on the bottom of the PCB (underneath the ADCA5190) and the heat sink. The J1 and J2 connectors are then mounted to the heat sink using two screws for each (see Figure 7). Then, the center conductor for the RF connectors is soldered to the PCB. Once complete, the ADCA5190-EVALZ is ready for testing.

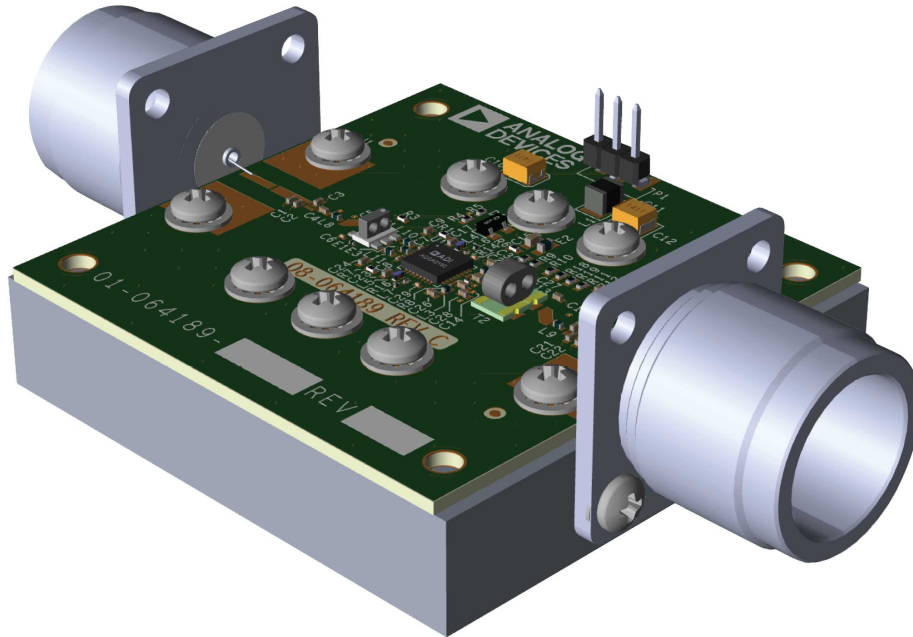


Figure 6. ADCA5190-EVALZ Top Side, Fully Assembled

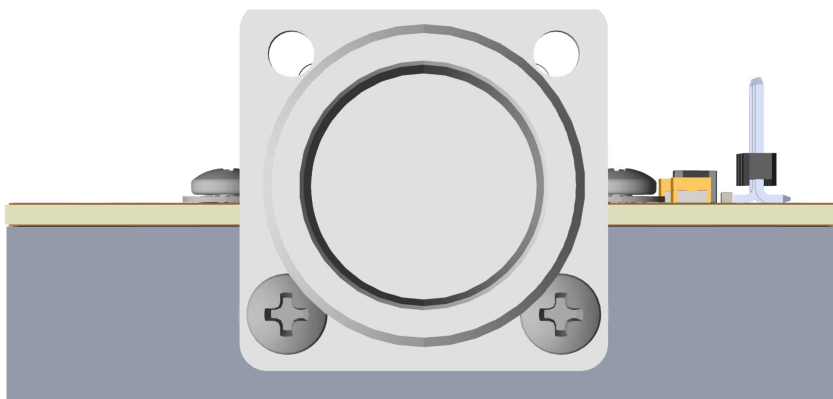


Figure 7. ADCA5190-EVALZ Side View

ORDERING INFORMATION

BILL OF MATERIALS

Table 2. Bill of Materials¹

Reference Designator	Value	Tolerance	Minimum Rating	Footprint	Suggested Vendor	Suggested Part Number
C3	0.2 pF	±0.1 pF	100 V	0402	Murata	GRM1555C2AR20BA01D
C4, C16, C25, C26	0.01 µF	10%	100 V	0402	TDK	810-C1005X7S2A103K
C6	0.01 µF	10%	50 V	0201	Taiyo Yuden	UMK063BJ103KP-F
C10, C12	2.2 µF	10%	50 V	1411	Kyocera AVX	TAJB225K050RNJ
C11	0.01 µF	20%	100 V	0603	TDK	C1608X7R2A103M080AA
C15	0.047 µF	10%	50 V	0603	TDK	06035C473KAT4A
C27, C28	180 pF	1%	50 V	0402	Murata	GRT1555C1H181FA02D
C28, C29	220 pF	10%	50 V	0201	Murata	GRM033R71H221KA12D
D1	2.5V	0.2%	15 mA	SOT-23-3	Analog Devices, Inc.	ADR5041ARTZ
E1	1000 Ω ferrite	25%	170 mA	0201	Murata	BLM03BX102SN1D
E2	220 Ω ferrite	25%	1.8 A	0603	Taiyo Yuden	FBMH1608HM221-T
J1, J2	75 Ω	N/A	N/A	N/A	Pasternack	PE4504
L1	2.2 µH	20%	1.6 A	1210	Taiyo Yuden	BRL3225T2R2M
L2, L3	270 nH	5%	590 mA	0402	Coilcraft	0402DF-271XJRW
L8, L10, L11, R11, R12	0 Ω	N/A	0.1 W	0402	Panasonic	ERJ-2GE0R00X
L9	1.5 nH	0.2 nH	2.1 A	0402	Murata	LQW15AN1N5C8ZD
P1	3-pin header	N/A	N/A	3 x 2.54 mm	Molex	087898-0306
R3	1 kΩ	1%	0.1 W	0402	Panasonic	ERJ-2RKF1001X
R4, R6	2.0 kΩ	1%	100 mW	0402	Panasonic	ERJ-2RKF2001X
R5	3.3 kΩ	1%	100 mW	0402	Panasonic	ERJ-2RKF3301X
R8	2.0 kΩ	1%	50 mW	0201	Panasonic	ERJ-1GNF2001C
T1	1:1 transformer	N/A	N/A	AT224-3	Mini-Circuits	TC1-33-75G2+
T2	1:1 transformer	N/A	N/A	99-01-1618-2	Mini-Circuits	TRS1-182-75-3+
U1	CATV amplifier	N/A	N/A	5 mm × 5 mm, 32-lead LFSCP	Analog Devices	ADCA5190
C1, C2, C5, C7, C8, C9, C13, C14, C17, C18, C20, C21, C22, C23, C24, E3, L4, L5, L6, L7, R1, R7, R9, R10, R14, R16, R18, R19	Do not install	N/A	N/A	N/A	N/A	Do not install

¹ N/A means not applicable.

ORDERING INFORMATION

NOTES

**ESD Caution**

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NONINFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.

