


Snap 6S

ORIGINALITY DESIGN SMART - AND BEAUTIFUL

.....



QUICK GUIDE

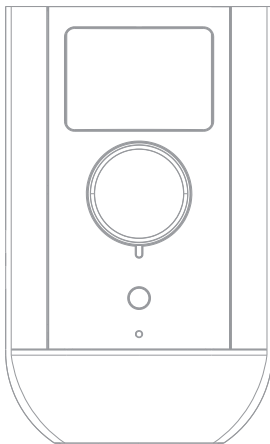

What's in the box

Please consult this checklist for all parts.



Snap 6S



Power adapter



USB cable



Bracket(A)




Screws(2 kinds)x2



Manual



Bracket(B)

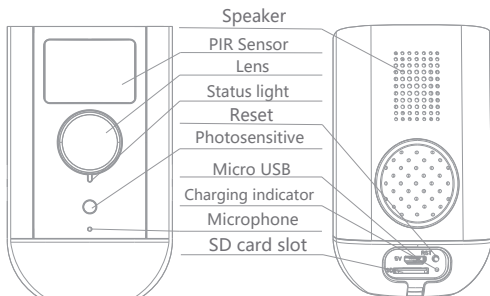

Power Port DC 5V±10%

Power on/off Press the button for 3 seconds to turn on/off the camera

Status light

- Red light solids on: the camera network is abnormal
- Red light blinks: awaiting WiFi connection, or currently connecting (faster blinking)
- Blue light solids on: camera running correctly

SD card slot Support local SD Card storage (Max.128G)


Reset Press and hold on for 5 seconds to reset the camera

Charging indicator

- Red indicator solids on: battery is charging
- Blue indicator solids on: charging completed


Battery capacity 9400mAh (Two 21700 lithium-ion batteries)

Mode 1 Bracket (A) Installation

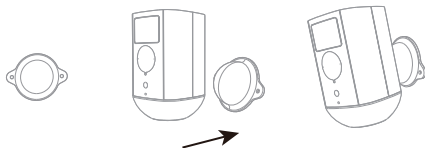

1. Fix the bracket on the wall with screws
2. Bring the camera closer to the bracket

Mode 2 Bracket (B) Installation

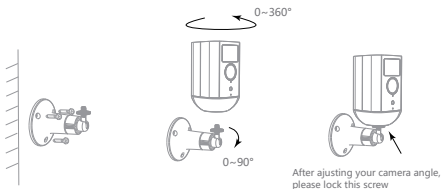

1. Fix the bracket on the wall
2. Install the camera in the bracket and lock it with the screw

Download

Smart Life is available for both iOS and Android OS. Search the name 'Smart Life' in App Store or Android Market, or scan the QR-Code to download the App.

Support



iOS



Android



Download App(iOS&Android)

Set up router

The router supports the 2.4GHz WiFi (doesn't support the 5GHz). Before connecting to the WiFi network, please set the parameters of the router, and record the SSID and password of your WiFi.



2.4GHz




5GHz



Registration process

- Step 1** Open the Smart Life App, click "Register", read the "Privacy Policy" and click "Agree" .



Update date : 2018.4
Come into force date : 2018.5

So you have purchased our Smart LifeSmart device hardware and are starting to use the Smart LifeSmart device software and all its functionalities! Any information you share with us (e.g. for creating a Smart Life Account) will help us to provide you with services related to Smart LifeSmart device and to improve them to make them even better. We explain here our ways of collecting and using information, and how we protect your privacy. In this privacy policy, "personal data" means information that can be used to identify an individual, either from that information alone, or from that information and other information we have access to about that individual. We collect both personal and non-personal data to enable and facilitate the best user experience possible.

What information is collected and how do we use it?

Disagree

Agree

- Step 2** Input a legal and valid Mobile number or Email address and click "Continue". Input Verification Code, then log in the app.

Register

Canada +1 >

Mobile number/Email

Continue



☒ I agree with Service Agreement and Privacy Policy

Verification Code


Verification code has been sent to: admin@gmail.com,
Resend (56s)

QR Code Configuration

- 1 Open the Smart Life App, click "Create family", and you can customize the Family name and related settings .




- 2 Continue to click "Security & Sensor" >> "Smart Camera", and then choose "Add Device" or "+", ready to add camera.



- 3 In "Add Device" this interface, continue to click "next step", and then you should input your WiFi's passwords.

Add Device

Power the device on and make sure the indicator is flashing quickly or a prompt tone is heard



Help

next step

Enter Wi-Fi Password

Only support 2.4GHz Wi-Fi network



OK

Note:

- 1) Camera only supports 2.4GHz WiFi network.
- 2) The number of bits in the ssid and passwords of the router should not exceed 24 digits.

- 4 In this interface, you should scan the QR code in your phone with the camera, when the camera comes out "dong dong dong". And you can complete the configuration about 30s.

Scan with the camera

When you tap CONTINUE, the mobile phone displays a QR code. Hold the camera 15 to 20 cm in front of the mobile phone for the camera to scan the QR code.



Heard nothing at all

Continue

Heard the beep

- 5 When connecting, you should make sure your router, mobile, and camera are as close as possible. When camera added successfully, click "✓" you could also DIY the camera's name.



Connecting

Make sure your router, mobile, and device are as close as possible





- ✓ Device found
- ✓ Register device to the smart cloud
- ✓ Initializing device

Device added successfully



In "Smart Camera" interface,click "",you can set the camera common functions.



Screenshot



Speak



Record

Q: The device cannot be previewed properly?

A: Check whether the network is normal, you can place the camera close to the router, and if not, it is recommended to reset the device and add it again.

Q: Why is it still in the list of devices after resetting?

A: The reset device only resets the network configuration of the camera, but cannot change the configuration on the App, remove the camera, and must be deleted by the App.

Q: How to cut the camera network to another router?

A: First remove and reset the device on the App and then configure the device again by the App.

Q: Why doesn't the device identify the SD card?

A: It is recommended to plug in SD card after power cut. Confirm whether the SD card is normally available and the format is FAT32. And the TF card can't be identified when the internet environment is not good.

Q: Why I can't get the notifications with my cell phone App?

A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened; Message notification and authority confirmation in the mobile phone system have been opened.



Functions

Remote wake-up

The camera will be in a sleep mode to save power; you can have a preview in App.

Full-duplex audio

You can see and hear the visitor in your App from the camera.

PIR

When the camera detects someone stopping by, it sends an alarm message to your cell phone.

Low battery alarm

When the battery power is lower than your set, the App will send a notification to your mobile phone.

Record

Using SD card or opening the Cloud-Storage Service, to keep recording for every moment.

Day & Night

Powerful night vision means no interruptions, even in complete darkness.



Daytime



Night

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and consider removing the no-collocation statement.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

