


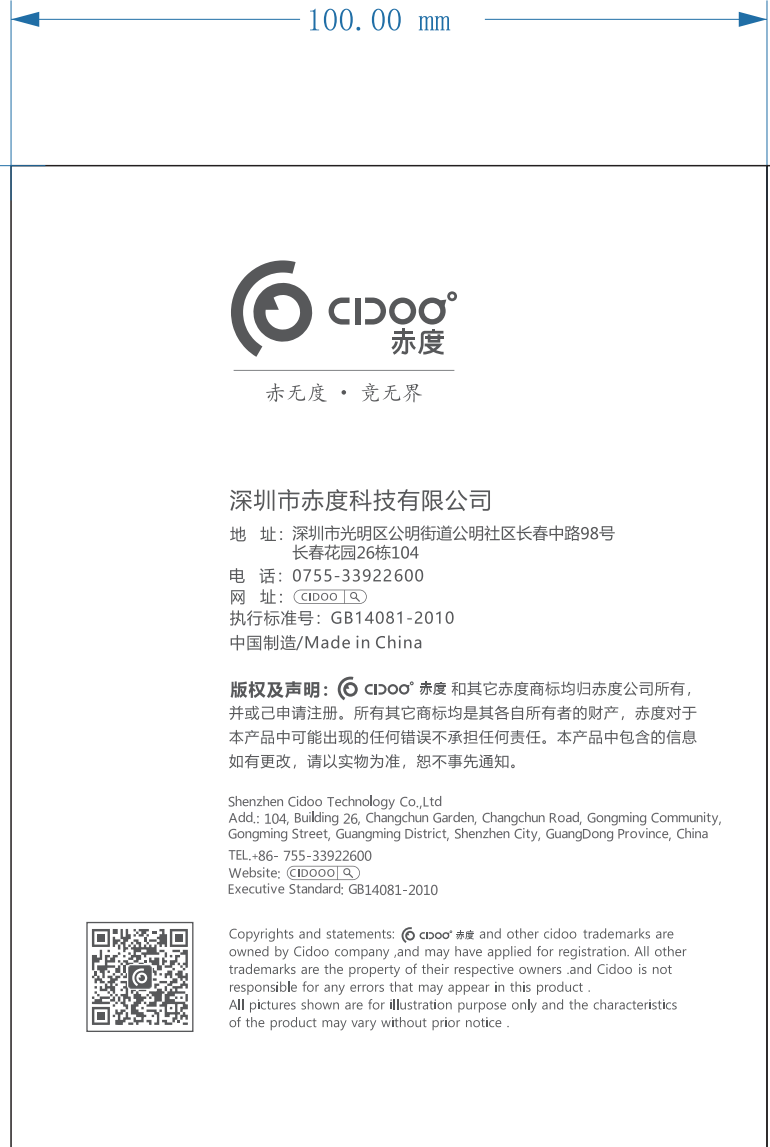

赤无度 · 竟无界

深圳市赤度科技有限公司

地址：深圳市光明区公明街道公明社区长春中路98号

电话：0755-33922600

网址：CIDOOO.COM

执行标准：GB14081-2010

中国制造/Made in China

版权及声明：CIDOOO 赤度和其它赤度商标归赤度公司所有，并己申请注册。所有其它商标均是其各自所有者的财产。赤度对于本产品中可能出现的所有错误不承担任何责任。本产品中包含的信息如有更改，请以实物为准，恕不事先通知。

Shenzhen Cidoo Technology Co., Ltd.
Add: 104, Baking 26, Changchun Road, Gongming Community, Gongming Street, Guangming District, Shenzhen City, Guangdong Province, China
TEL: 86-755-33922600
Website: CIDOOO.COM
Executive Standard: GB14081-2010

Copyrights and statements: CIDOOO 赤度和其它 Cidoo trademarks are owned by Cidoo company and may have applied for registration. All other trademarks are the property of their respective owners and Cidoo is not responsible for any errors that may appear in this product. All pictures shown are for illustration purpose only and the characteristics of the product may vary without prior notice.

产品有害物质名称及含量

为满足《电器电子产品有害物质限制使用管理办法》（中华人民共和国工业和信息化部第32号令）的相关规定和要求，本产品中有害物质，按部件分类，声明如下：

产品中有毒物质的名称及含量

部件名称	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr6+)	多溴联苯 (PBBs)	多溴二苯醚 (PBDEs)
电路板组件	×	○	○	○	○	○
键盘外壳	○	○	○	○	○	○

*本表格依据SJ/T 11364.4的规定编制。

○：表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求以下。

×：表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572规定的限量要求。

本产品所含有的有害物质都是由于现阶段技术限制而找不到可供替代的物质导致的，符合《中国电器电子产品有害物质限制使用管理办法》的要求。且属于欧盟RoHS豁免范围内，在设计产品时已经做了特别考虑，确保外观部件采用无毒无害的环保材料制造，消费者在正常使用情况下不会接触到有害物质，不会对人体造成危害。

在中华人民共和国境内销售的电器电子产品上印有“环保使用标志”（EPUP）符号，国家统一的数字代码产品的正常环保使用要求。

保修卡

在购买产品时，请完整清楚地填写下列信息，并加盖销售章，以保障您的合法权益。

用户信息	联系电话	电子邮箱
	通信地址	邮政编码
产品信息	产品名称	销售日期
	产品型号	发票号码
销售商信息	商家名称	联系电话
	通信地址	邮政编码

注：

- 此表应由销售商盖章确认；
- 对于退换货产品，在收到退换货产品时，本保修卡与“三包”凭证；
- 维修记录以授权服务机构维修凭证为准，申请售后服务，请妥善保管。

欢迎您选购赤度V65机械键盘，希望您使用愉快，功能操作说明请参以下内容。

默认快捷键

灯光设置按键：

- FN+↑：背光灯光亮度增加
 - FN+←：背光灯光速度减小
 - FN+→：背光灯光速度增加
 - FN+↓：切换开启背光灯
 - FN+P：背光灯色相减
 - FN+I：背光灯饱和度加
 - FN+/?：长按FN+/? 3秒进入灯效测试模式，所有背光灯循环播放，按任意键（除了方向键之外）退出测试模式
- FN+↓：背光灯光亮度减小
 - FN+→：背光灯光速度减小
 - FN+↑：切换关闭背光灯
 - FN+P：背光灯色相减
 - FN+I：背光灯饱和度减
 - FN+/?：长按FN+/? 3秒进入灯效测试模式，所有背光灯循环播放，按任意键（除了方向键之外）退出测试模式

Space+Backspace：长按Space+Backspace插入USB通电FN键LED灯亮起，键盘恢复到出厂设置

多媒体按键：

- FN+Q：Windows 系统
 - FN+2：F2
 - FN+5：F5
 - FN+8：F8
 - FN+←：F11
 - Shift+Esc：~
- FN+W：Mac 系统
 - FN+3：F3
 - FN+6：F6
 - FN+9：F9
 - FN+→：F12
 - FN+Esc：~
- FN+1：F1
 - FN+4：F4
 - FN+7：F7
 - FN+0：F10
 - FN+Esc：~

其他功能按键：

Space+N：切换6键无冲/全键无冲，出厂默认6键无冲。按住Space+N后插入USB通电

Space+B或FN+R_SHIFT+R：长按Space+B或者长按FN+R_SHIFT+R后插入USB线通电，进入DFU(设备固件升级)固件升级模式

Space+L_Ctrl或Caps：交换左Ctrl键和大小写锁定键按功能。按住Space+L_Ctrl或Caps后插入USB通电，交换L_Ctrl和Caps按功能。Space+Backspace或I：交换Backspace和I按功能。按住Space+Backspace或I后插入USB通电，交换Backspace和I按功能

蓝牙配对方法：

请按照以下步骤将键盘和您的设备来进行蓝牙配对

- 赤度V65蓝牙键盘最多可同时连接3个蓝牙设备，打开键盘电源（靠近USB接口处为关闭，反方向为打开），按住FN+Z或者按住FN+X或者按住FN+C 3-5秒，当Z或者X或者C开始闪烁，表示键盘在可连接状态。
- 在要连接的设备上打开蓝牙，搜索并选择CIDOO V65。
- 3.键盘与您的设备连接成功后，Z键或者X键或者C键会停止闪烁，短按FN+Z或者FN+X或者FN+C键切换已经配对好的蓝牙设备。

FN+Space：短按“FN”+“SPACE”键会断开蓝牙模式，每当键盘插上USB线后，会自动优先识别为有线模式。

自动休眠模式：

键盘在5分钟无操作，键盘背光会自动关闭。

FN+CAPS：蓝牙模式下长按FN+CAPS按键进入深度休眠模式，休眠时指示灯灭蓝牙断开，再次长按或者插入USB线解除深度休眠模式，指示灯亮起

注意：为了节能环保，在蓝牙模式时，键盘无背光，插线或者恢复通电后可让背光亮起。

充电指示灯：

当键盘的电池电量低时（电池电量小于3.5V）FN键会持续闪烁红灯，充电时，FN键会变成绿灯闪烁，充满后FN键灯灭。


自定义设置：

赤度V65支持VIA 程序改键布局


注意：请确保您的键盘已正确插入电脑设备

VIA 安装步骤如下：


- 请访问<https://github.com/WestBerryVIA/via-releases/releases>选择您需要的最新的VIA软件然后下载并安装在电脑上。如下图

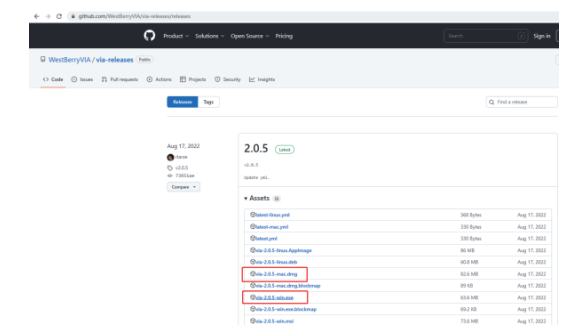

2.从赤度官网下载CIDOO V65 json文件并上传到VIA软件，网址为：WWW.CIDOOO.COM，如下图

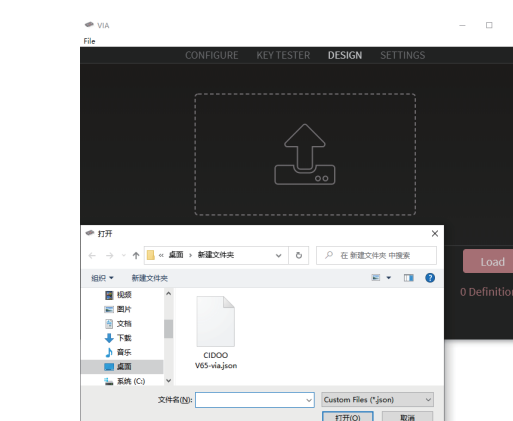

3.如下画面表示VIA软件安装完成并成功连接。

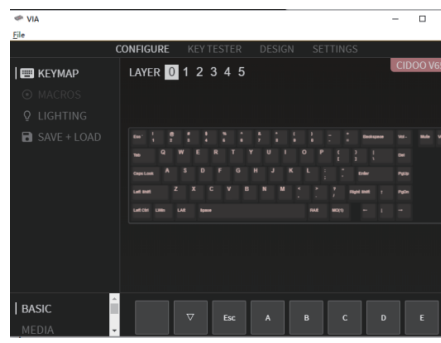

如果VIA软件无法识别您的键盘，请联系我们的客服人员寻求帮助

如果您的键盘已经插入VIA会自动检测您的键盘是否兼容。键盘记忆是持久的，这意味着无论您在哪里插入键盘，它都会记住设置。

在VIA软件页面上半部分，鼠标点击选择你想要更改的按键，然后再用鼠标点击VIA软件页面下半部分中你想要更改的按键，按该键功能生效。

更多设置板块请见以下说明：

宏设置：

CIDOO V65按键中没有设置多媒体按键，在此可以通过VIA软件映射多媒体按键到你想要的按键上，实现多媒体快捷操作。CIDOO V65默认配置了0-5层6个层级，每个单独的按键都可以拥有多个功能，这对于较小的键盘很重要，因为它们没有足够的按键来实现所需的所有功能。

特殊键设置：


在此可以通过按键变更功能将特殊按键替换到你想要的按键上，实现该功能的快捷操作。

QMK灯光：


CIDOO V65 VIA软件中默认提供了多种不同的RGB灯光效果，你可以在上面改变灯光亮度，速度，颜色以及定制你想要的灯光效果，也可以更改按键来操作你设定好的灯光效果。

其他定制化：


CIDOO V65提供其他功能按键的定制化改键。CIDOO V65默认定制了0-5层键盘布局图。层0：当你使用键盘连接到Win系统设备时，层0将被激活使用。层0：当你使用键盘连接到Mac系统设备时，层0将被激活使用，其中按键L Alt= Option L Win=Left Command R Alt= R Option

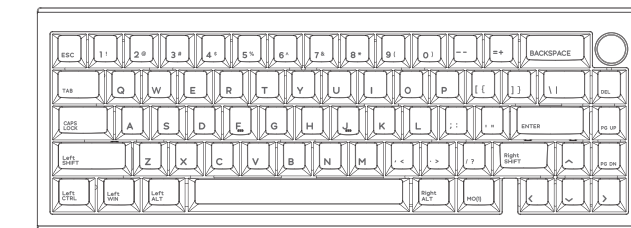


层1：当你使用键盘连接到Win/Mac系统设备时，长按MO(1)按键盘1将被激活使用

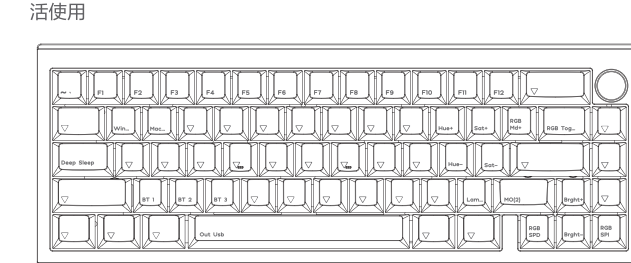

层2：当你使用键盘连接到Win/Mac系统设备时，长按MO(2)按键盘2将被激活使用

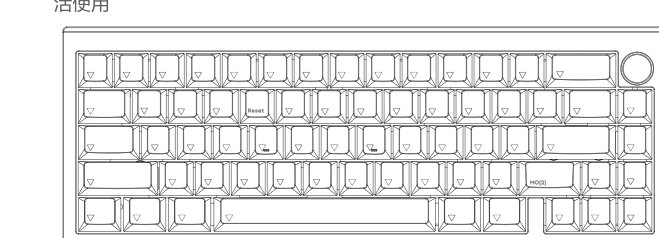


层3/4/5：为当前工厂预设的定制化键盘空白层级

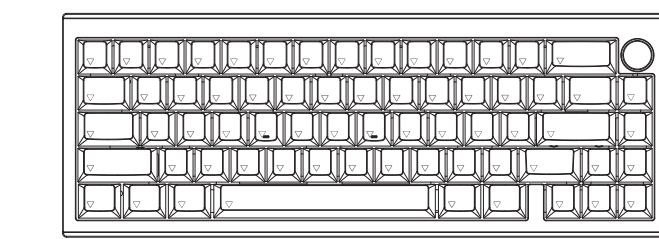

按键说明：

Win...	Windows模式	Mac...	Mac模式
Hue+	灯效色相加	Sat+	灯效饱和度+
RGB Md+	下一个RGB灯光模式	RGB Tog...	关闭/开启键盘背光
Deep Sleep	关闭背光	Hue-	灯效色相减
Sat-	灯效饱和度减	BT1	蓝牙设备1
Lam...	灯效测试模式	Bright+	键盘背光亮度+
Out Usb	解除物理连接解除状态	RGB SPD	RGB灯光速度+
Bright-	键盘背光亮度-	RGB SPI	RGB灯效速度+
Reset	重置键盘	MO(1)	长按MO(1)层1键激活
MO(2)	长按MO(2)层2键激活		

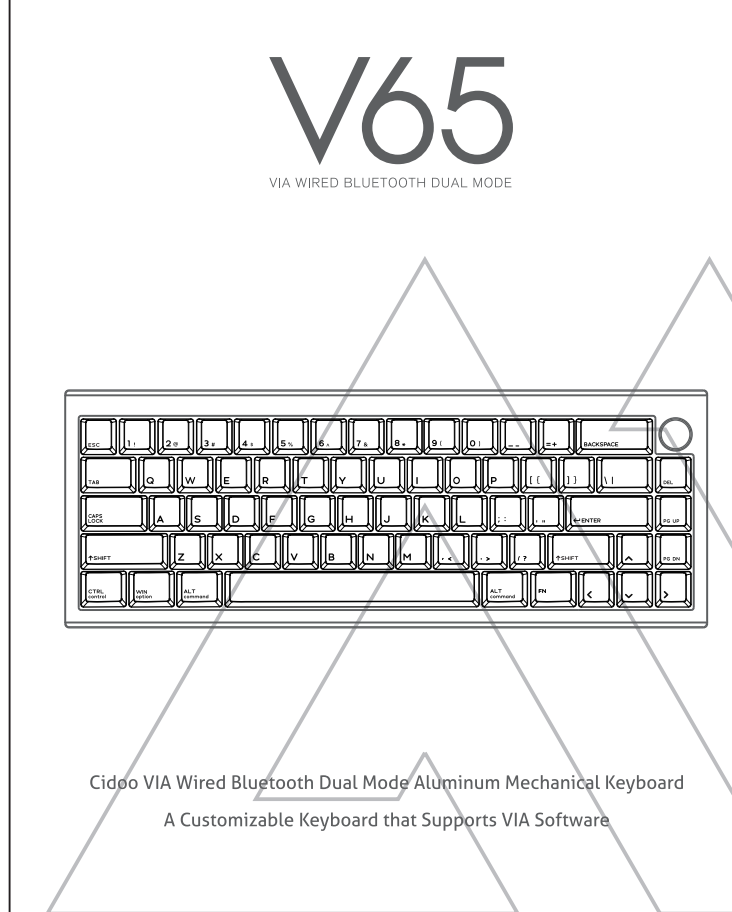

Thank you for purchasing your Cidoo V65 Mechanical Keyboard. We hope you're enjoying it so far. If you've landed here, you probably want to take full advantage of the keyboard's features so you've come to the right place.

We'll start with the basics, then we'll move on to complete custom configuration.

THE BASIC

Default Hot Keys
Hold FN + listed keys to activate

LED keys
FN+↑: LED backlight brightness Increase
FN+↓: LED backlight brightness decrease
FN+←: LED backlight speed decrease
FN+→: LED backlight speed increase
FN+I: LED toggle On/Off
FN+J: Toggle LED backlighting mode
FN+P: LED hue increase
FN+Q: LED hue decrease
FN+R: LED saturation increase
FN+S: LED saturation decrease
FN+/? : Enter LED test mode (Long press the "FN" and "??" keys, the keyboard enter LED mode test, all the keys LED lights on, press any key (except arrow keys) to exit.)

Space+Backspace: Reset the keyboard. Long press "Space" + "Backspace" keys and then plug in USB cable until "FN" LED light on.

Media Keys:

FN+Q: Windows System	FN+W: Mac System	FN+1: F1
FN+2: F2	FN+3: F3	FN+4: F4
FN+5: F5	FN+6: F6	FN+7: F7
FN+8: F8	FN+9: F9	FN+0: F10
FN+←: F11	FN+→: F12	FN+Esc: ~

Other function Keys :

Space+N : Toggle keyboard 6 KRO/NKRO (Default state 6KRO). Long press "Space" + "N" key and then plug in USB cable.

Space+B or FN+R_SHIFT+R : To enter DFU (Device Firmware Upgrade) mode. Long press "Space" + "B" or FN+R_SHIFT+R and then plug in USB cable until FN LED flash to enter the DFU mode.

Space+L_Ctrl or Caps : Exchange L_Ctrl and Caps key function. Long press "Space" and "L_Ctrl" or "CAPS" and then plug in USB cable to exchange two keys function.

Space+Backspace or I : Exchange Backspace or I key function. Long press "Space" and "Backspace" or "I" and then plug in USB cable to exchange two keys function.

Bluetooth® Pairing Instructions:

Perform the following steps to pair this keyboard with your device(s).

- This Bluetooth keyboard can be paired with up to three devices at the same time. Power On keyboard. (Close to USB port is OFF. Reverse direction is ON). Press and hold the FN and Z / or FN and X / or FN and C keys for 3-5 seconds. When Z/X/C starts flashing, the keyboard is ready to connect.
- Open the Bluetooth settings on your device and scan for available devices.
- Locate and select the "CIDOO V65" entry.
- Once the keyboard has connected to your device, the Z/X/C key will cease flashing, indicating that Bluetooth pairing was successful. Short press "FN" and "Z" or "FN" and "X" or "FN" and "C" keys to switch paired Bluetooth device.

FN+Space : Short press "FN" and "SPACE" key, will disconnect Bluetooth mode, when you plug in USB cable, it turns to USB wired mode priority.

Auto sleep mode:

After 5 minutes without a keypress, the backlighting will turn off to conserve battery.

FN+CAPS: Long press "FN" and "CAPS" key to enter deep sleep under Bluetooth mode, the "CAPS" indicator will light off and Bluetooth disconnect, press FN and CAPS key again or plug in USB cable to exit deep sleep mode, indicator will light on.

Note : In order to saving energy, Keyboard without backlighting under Bluetooth mode, unless plug in factory USB cable or power restoration.

Battery Charging:

FN key will blink red repeatedly when the keyboard is low on battery (battery voltage less than 3.5V). It turns to green when charging, it's off after charging finished.


CUSTOM CONFIGURATION

How do I configure my keyboard ?

Cidoo V65 support VIA firmware to remap the keys. VIA is a software that allows you to configure your keyboard.

Note: Please make sure your keyboard has been correctly plugged in your computer device.

VIA setup instructions are here :
1. Please visit "https://github.com/WestBerryVIA/via-releases/releases" to download the latest VIA application for your computer's OS here.

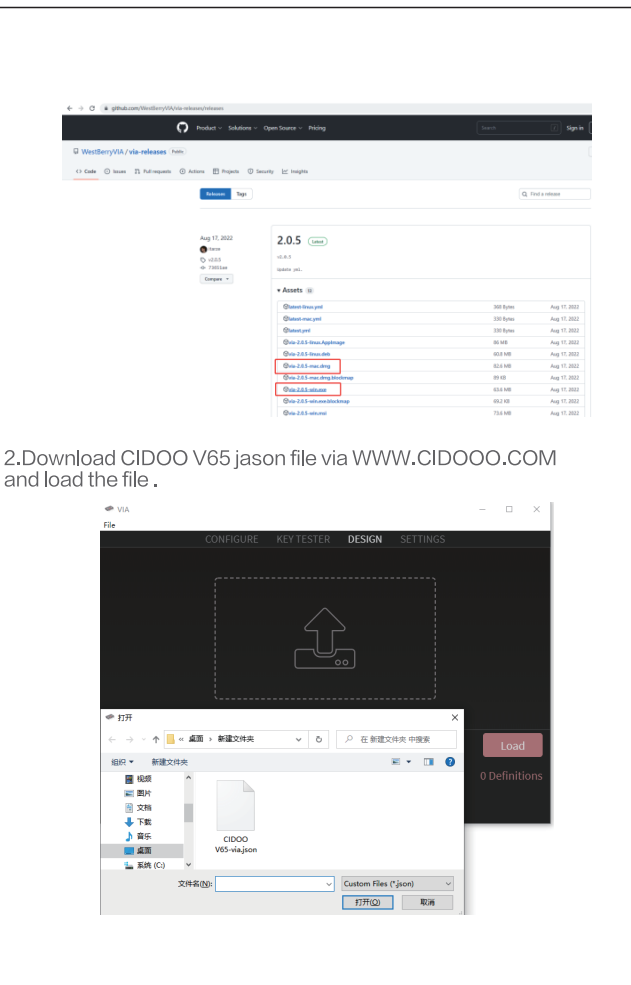

3. Installation is completed and VIA software connected successfully if show below picture.

If the VIA software cannot recognize your keyboard, please reach out our support to get the instruction.

VIA automatically detects your compatible keyboard if it's plugged in. Keyboard memory is persistent, which means that wherever you plug in keyboard, it remembers the settings.

On the top half of VIA software, choose one key by your mouse, and then select the key that you wanted on the bottom half of VIA software, and it was effected.

Firstly switch to VIA software key tester table, there is not any background color before you press any keys, when you want to test this key you have programmed, press it and the background color will change to red color means it works, otherwise it is not work.

See below for more information about configuration Macros setting

CIDOO V65 does not have physical multimedia keys, you can remap the keys through the VIA software to achieve the function. CIDOO V65 is configured with 6 layers from 0 to 5 by default, and each individual key can have multiple functions. This is important for smaller keyboards, where there aren't enough physical keys to do all the functionality you need.

Special keys setting

Here you can remap the key to replace the special key to the key you want, to achieve the quick operation of the function.

CIDOO V65 VIA software provides many different RGB lighting effects by default. You can change the lighting brightness, speed, color and customize the lighting effect you want. You can also change the key to operate the lighting effect you set.


Others custom

CIDOO V65 provides other customized remap to other functional keys.

About Layers

Layers allow you to configure your keyboard with more behaviors than its number of physical keys. CIDOO V65 default customized 0-5 layer keyboard layout.

Layer0: This layer will be activated when your keyboard connected to the Windows system.
Layer0: This layer will be activated when your keyboard connected to the Mac system.
L Alt= Option L Win=Left Command R Alt= R Option

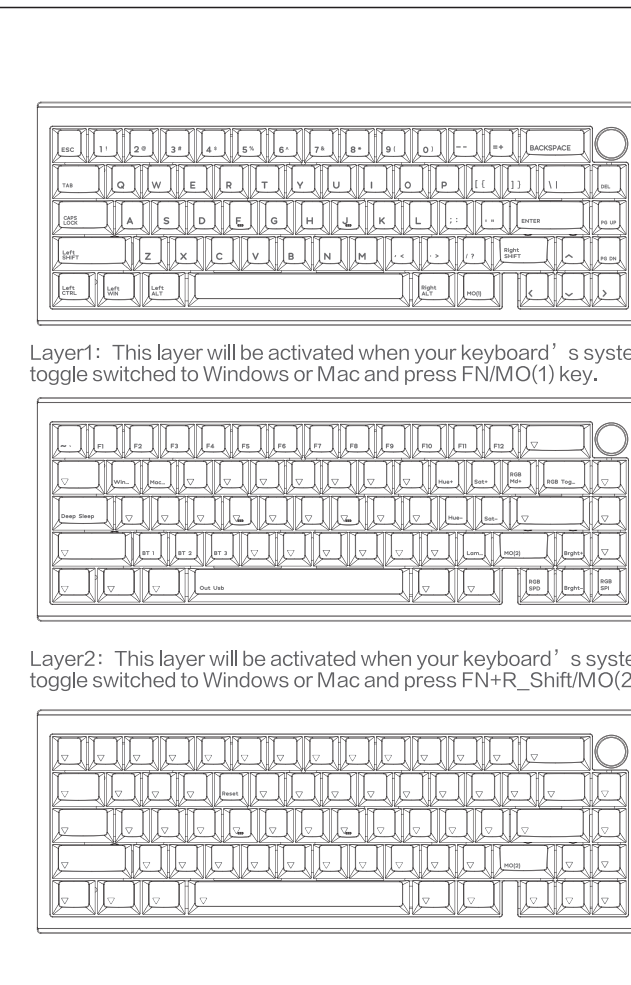

Layer1: This layer will be activated when your keyboard's system toggle switched to Windows or Mac and press FN+MO(1) key.

Layer2: This layer will be activated when your keyboard's system toggle switched to Windows or Mac and press FN+R_Shift+MO(2) key.

Key description:

Win...	Windows Mode	Mac...	Mac Mode
Hue+	Hue Increase	Sat+	Light Saturation+
RGB Md+	RGB Mode Next	RGB Tog...	RGB Toggle
Deep Sleep	Deep Sleep	Hue-	Hue Decrease
Sat-	Light Saturation-	BT1	Bluetooth Device 1
BT2	Bluetooth Device 2	BT3	Bluetooth Device 3
Lam...	Lamp Test	Bright+	Backlight Increase
Out Usb	Switch to USB wired mode	RGB SPD	RGB Speed Decrease
Bright+	Backlight Decrease	RGB SPI	RGB Speed Increase
Reset	Reset the keyboard	MO(1)	Layer 1 will be activated when holding this key
MO(2)	Layer 2 will be activated when holding this key		

保修声明

感谢您对我们产品的信任与支持，为了您放心使用本产品，更好地保障您的权益，我们将严格遵守并执行相关规定，实行售后相关服务：

服务内容：按微型计算机商品维修更换退货责任规定进行服务

以下不属于服务之范围：

(A) 误用、滥用或不当的运输；

(B) 维护或保管，例如但不限于在不适当的温度、湿度或其他不当环境条件下使用，不可外力或意外事件、网络或电力中断等非我们可合理控制的事项；

(C) 非授权人员擅自维修或改动；

(D) 任何第三方产品或服务；

(E) 将产品用于非指定或预期的目的；

(F) 以其他方式使用或使用不当的方式使用，产品使用过程中发生的正常损耗或老化，以及因其他产品使用不当导致的问题不属于保修范围。如产品品质有识别标签被更改或损毁，本保证将失效。产品及随附物料的完好和齐备不属于保修范围。您应在接收产品时当场检验并对任何不符提出异议。本保证接受不受特定的法律权利，根据法律可能还享有其他权利。本文件的任何内容均不影响您根据法律规定不能排除或限制的消费者权益。

产品保修信息

产品名称	保修范围	部件名称	保修期（月）	保修服务类型	备注
V65	主要部件	键盘	12	取送维修	

注：保修说明
(1) 本表不适用于产品保修范围外的维修。产品保修范围以产品保修卡为准。
(2) 本表不适用于产品保修范围外的维修。产品保修范围以产品保修卡为准。
(3) 本表不适用于产品保修范围外的维修。产品保修范围以产品保修卡为准。
(4) 本表不适用于产品保修范围外的维修。产品保修范围以产品保修卡为准。

QC PASS