




INSTALLATION INSTRUCTIONS

432KLDUR LOCKDOWN PUSH SWITCH

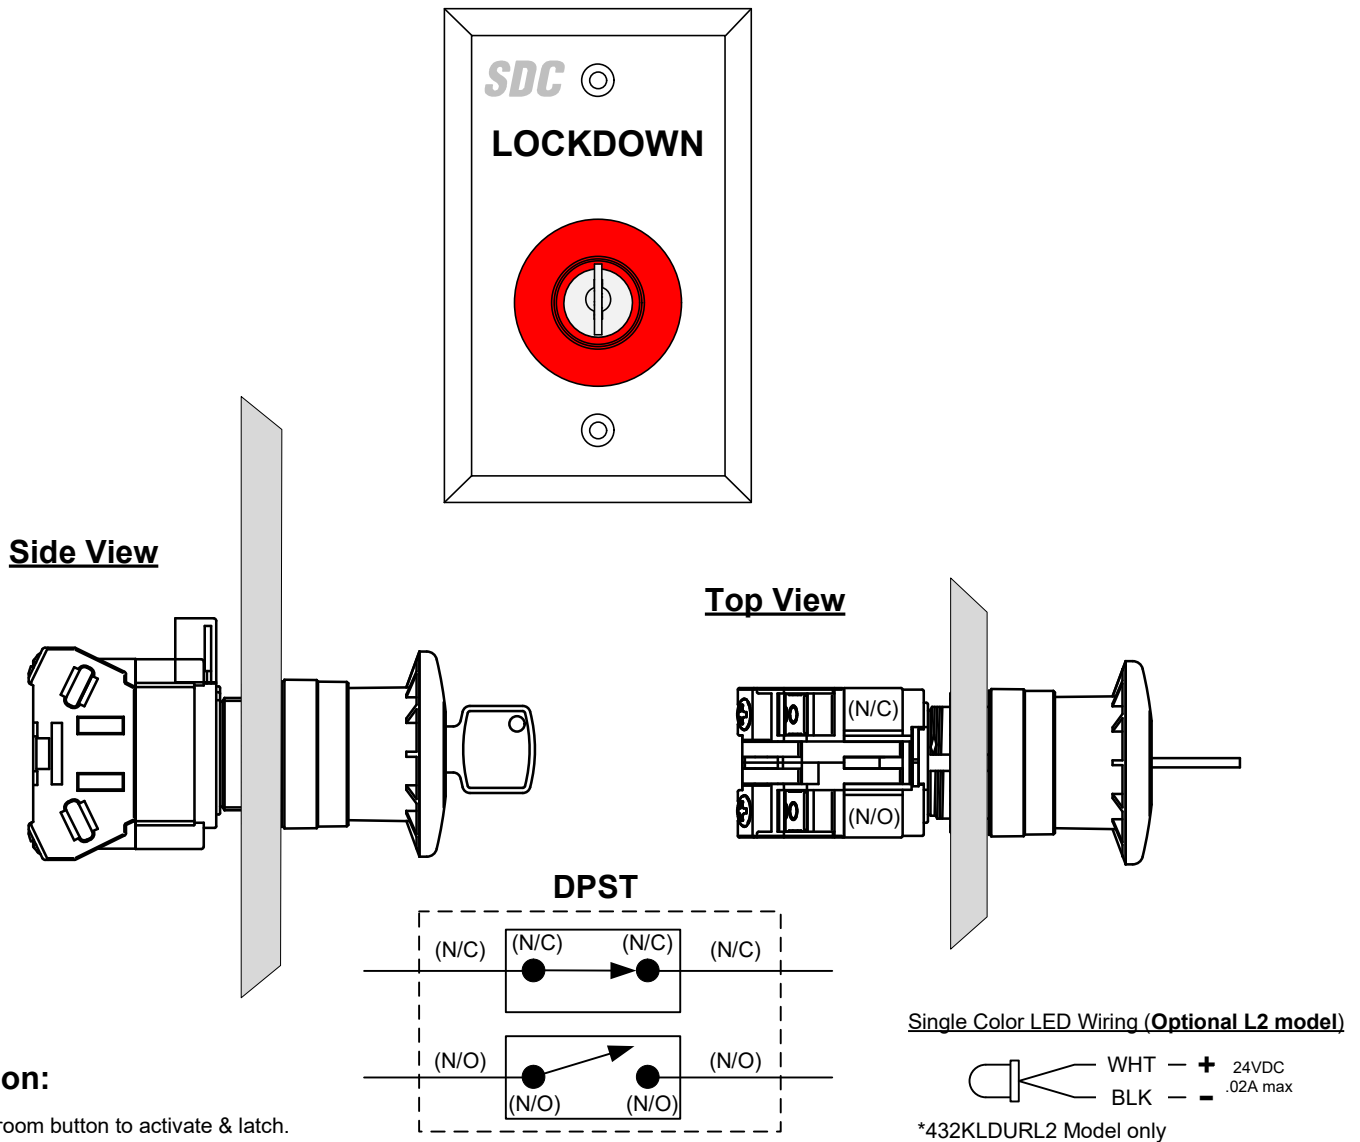

Operation:

Push mushroom button to activate & latch.
Insert key & turn clockwise to reset.

Specification:

Mounting : Single-Gang, 2" Depth Min.
Overall Dimensions : 2-7/8" H x 4-5/8" W x 3-1/4" D
(De-Activated, Less Key)
Plate Finish : 630 (US32D)
Contact Type : DPST (1 N/C & 1 N/O)
Contact Rating : 24VDC @ 3 AMPS (Resistive/Inductive)
Wire Size : 12~22AWG (Single)

UL 294 Performance Rating

Level I : Line Security / Destructive Attack / Standby Power

Level IV : Endurance

To be used with a Class 2 power supply or voltage compatible UL 294 or UL 603 listed power supply

Compliance with ANSI/NFPA 70 National Electrical Code

All peripheral modules for UL compliance are required to be UL Listed UL 294.

Any suggestions or comments to this instruction or product are welcome. Please contact us through our website or email engineer@sdsecurity.com