GUSOYO

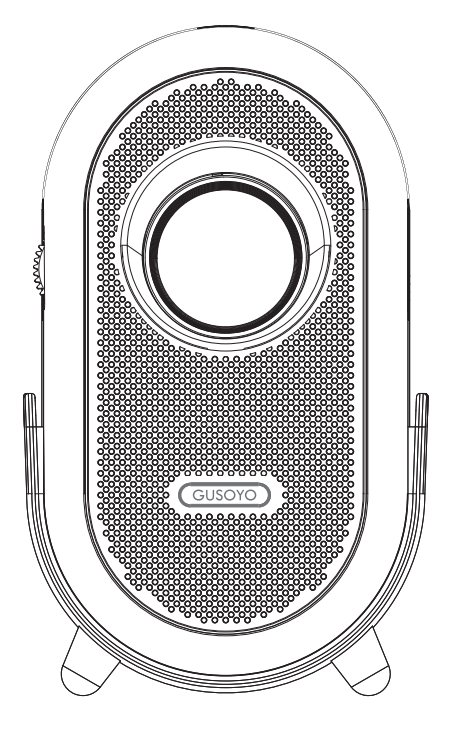

SMART PROJECTOR

Welcome Guide

Before you start, please read this product manual carefully.

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement.
To maintain compliance with FCC's RF exposure guidelines, the distance must be at least 20 cm between the radiator and your body, and fully supported by the operating and installation configurations of the transmitter and its antenna(s).

PACKING LIST



PRODUCT BRIEF

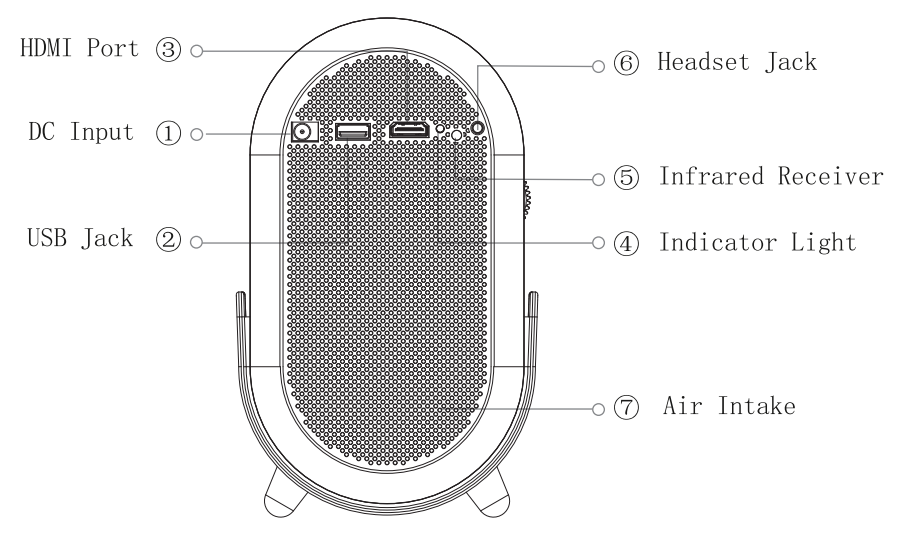



REMOTE CONTROL

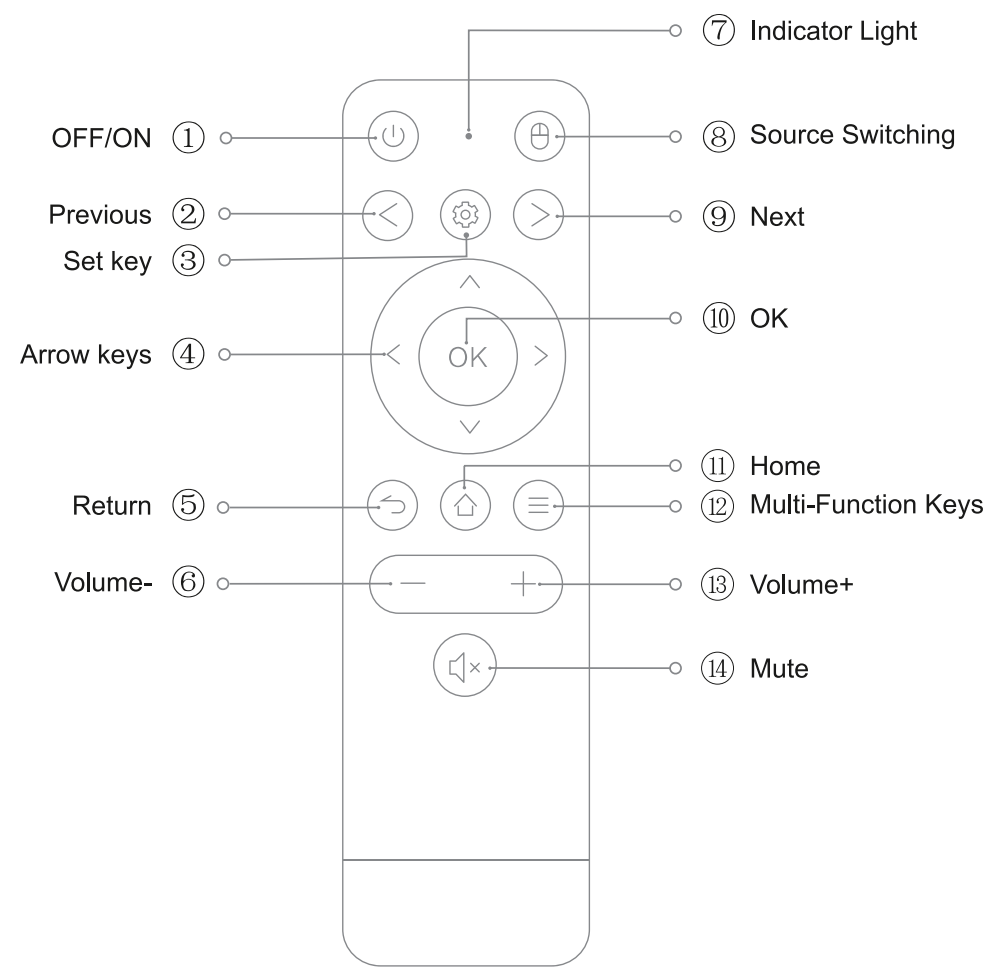

BASIC PARAMETERS

Display Technique	LCD	Type of light Specifications	LED	Product Type	Desktop
Size	129.7*121*200mm	Keystone correction	Four point correction	Focus way	Manual focus
Weight	1.12KG	Throw Ratio	1.2:1	Speaker	5W*2

INDICATOR STATUS

Operating State	Red Light	Blue Light
Standby	ON	OFF
Starting up	OFF	ON

INSTRUCTIONS

Power on

Method 1: Press the power button on the top of the projector to turn it on;

Method 2: Point the remoter control at the projector, and press the power button of the remote control to turn it on.





OFF

Short press the power button of the projector or the power button on the remote control once. When the prompt box for shutdown appears, short press the power button again or the power button on the remoter control.

GENERAL FAULT DESCRIPTION

The Fault	The solution
Unable to display projection	Shut down and reboot
Android crash	Shut down and reboot
Abnormal projection	Shut down and reboot
System prompt the projector is over heated, or automatic shut-down	Please do not block the front air outlet and rear air inlet mesh, restart

PRODUCT CONSIDERATION

1. When using the projector, please do not watch the lens directly to avoid damage to the eyes.

2. Please do not use in hot and humid environment.

3. Please do not block the air outlet or air inlet.

4. Please make sure there is at least 30cm space around the projector without any obstructions.



Warning:

* Block the projector Vented slits and openings.
* Wipe the device with a scrub, paraffin or solvent.
* Used under the following conditions :
- Extrerely hot, cold or humid environment.
- Ensure indoor temperature is between 5-40° C.
- Relative humidity is 80% maximum at 5-40° C, no condensation.
- Areas susceptible to large amounts of dust and dirt.
- Near any equipment that produce strong magnetic field.
- Sunlight exposure directly.
- The product is suitable for non-tropical climate.

Note:

Without the consent of the manufacturer, the user should not disassemble, squeeze or impact the projector, and avoid use in high temperature, high pressure, flammable and explosive environments. The manufacturer does not take any responsibility for damage to the projector caused by human reasons!

BLUETOOTH CONNECTION

In the main interface, use the remote control "∧" key to turn up the menu bar, select "setting" to enter the interface and then select "Bluetooth", select "Search Bluetooth" in the right column, select the name of the corresponding Bluetooth device and press "OK" to automatically connect, select "Pair", Bluetooth device matching connection success.

PROJECTION SIZE DISTANCE TABLE

Projection size (inch, no keystone correction)	Screen length*width(m)	Lens ~ screen (m)
30	0.7*0.4	0.94
40	0.91*0.51	1.23
50	1.13*0.64	1.51
60	1.36*0.77	1.80
70	1.57*0.88	2.06
80	1.78*1.0	2.33
90	2.0*1.12	2.61
100	2.20*1.24	2.84

材质：105g铜版纸 白色

7页风琴折

折前尺寸：540*120mm 折后尺寸：90*120mm