




Single Gas Spring Arm



GSAM001

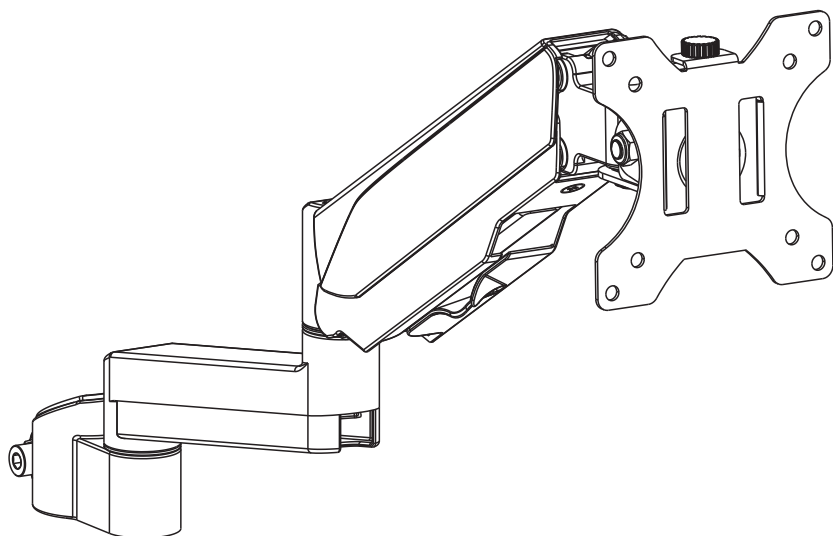

75x75/100x100




8kg
17.6lbs
RATED



support@walielectric.com

Supplied Parts List



Arm
(x1)



VESA Plate
(x1)



Top Screw
(x1)



Allen Key 6mm
(x1)




M4x12 Bolt
M-A (x4)



M4x16 Bolt
M-B (x4)



M5x12 Bolt
M-C (x4)



M5x16 Bolt
M-D (x4)




D5 Washer
M-E (x4)



Spacer
M-F (x4)

Step 1

Compatible with most WALI desk monitor mount with 1.375" (3.5cm) diameter center pole.
Put the Arm through the Pole, adjust the preferred height and tighten using Allen Key 6mm. (Pole not included)

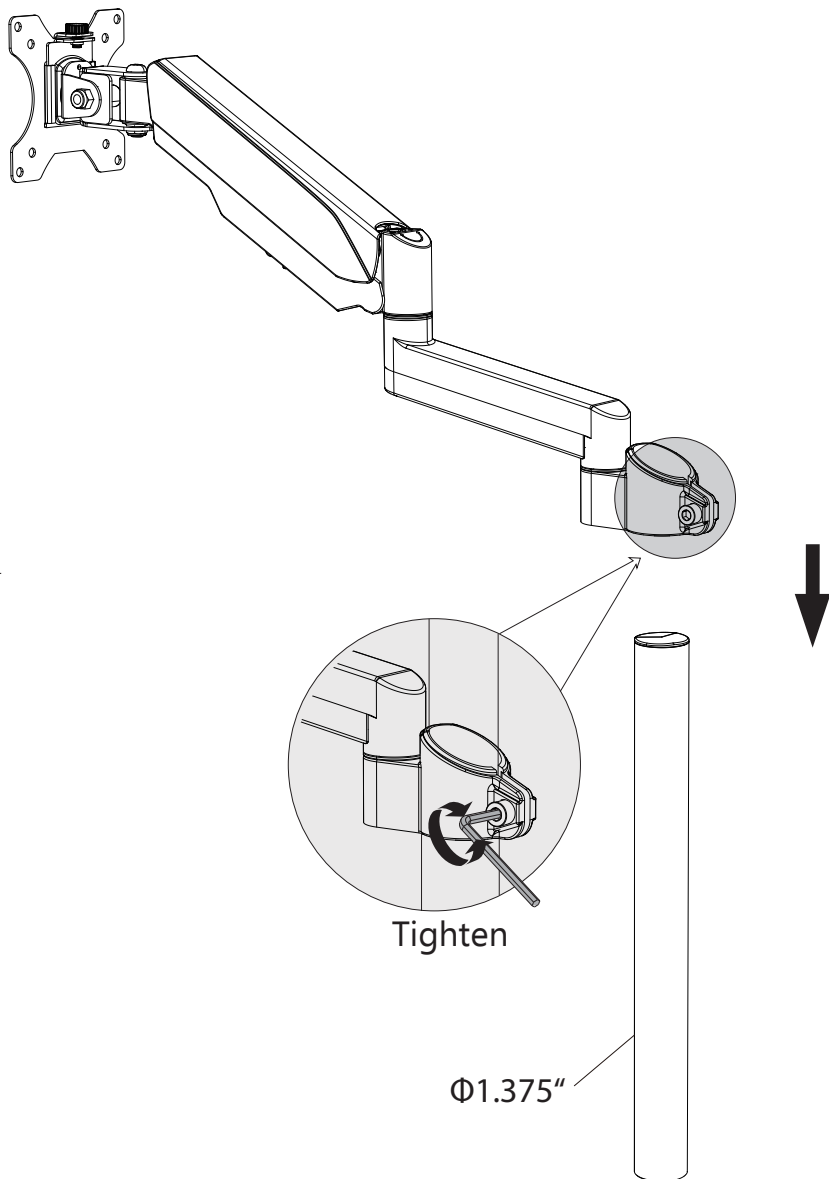


Step 2



Step 2.1

Select TV Screws

Only one screw size fits your TV




Hand thread screws into the threaded inserts on the back of your TV to determine which screw diameter (M4 or M5) to use.

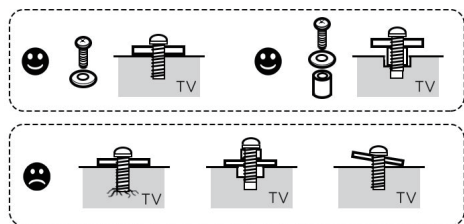


Step 2.2

Select Spacers (if needed)

NOT NEEDED

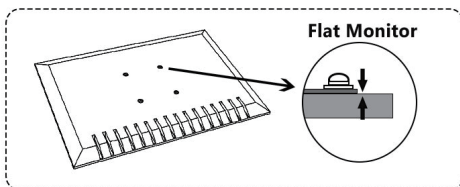


NEEDED FOR

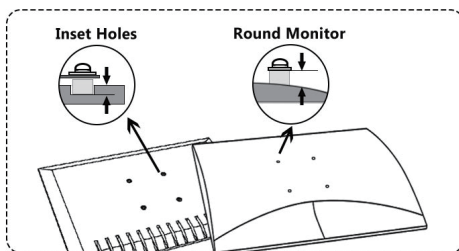


Step 2.3a

Select M4x12 Bolt (M-A) or M5x12 Bolt (M-C) according to your TV/Monitor, connect VESA Plate together with D5 Washer (M-E) into the mounting holes on the back of TV/Monitor, tighten with screwdriver. (Screwdriver needed but not included)

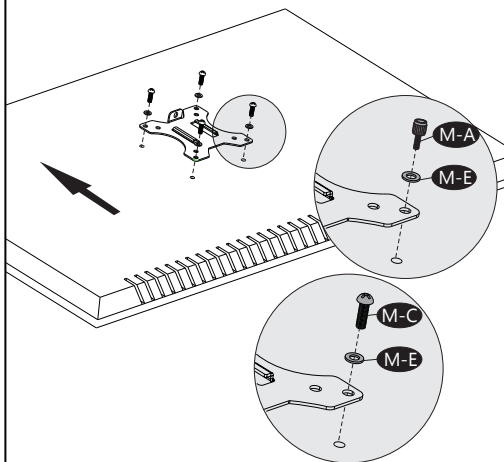


Step 2.3b

Select M4x16 Bolt (M-B) or M5x16 Bolt (M-D) according to your TV/Monitor, connect VESA Plate together with D5 Washer (M-E) and Spacer (M-F) into the mounting holes on the back of TV/Monitor, tighten with screwdriver. (Screwdriver needed but not included)

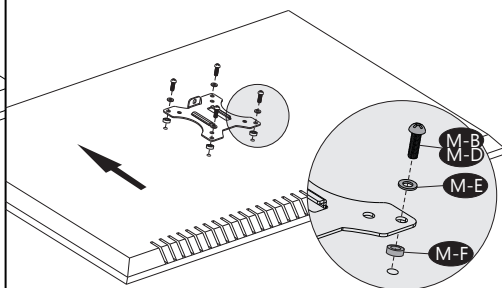


Step 3

Put the assembled TV/Monitor onto the Arm and ensure the stability, tighten the VESA plate using Top Screw.

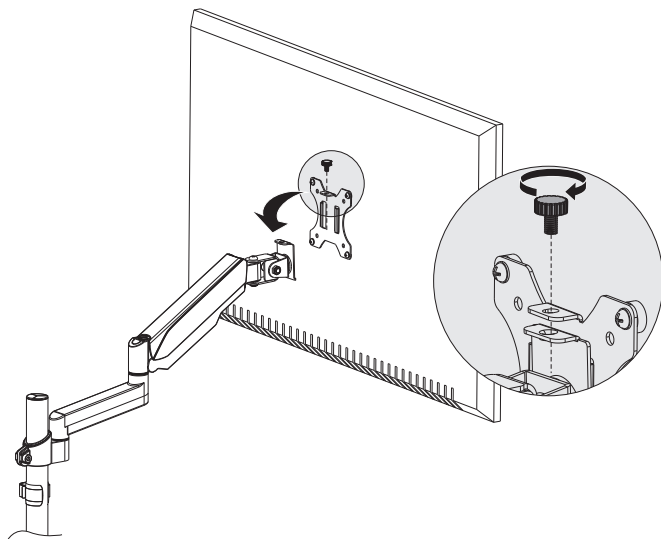


Step 4

Pull the bottom cable slot cover to the VESA direction to detach it off the arm.

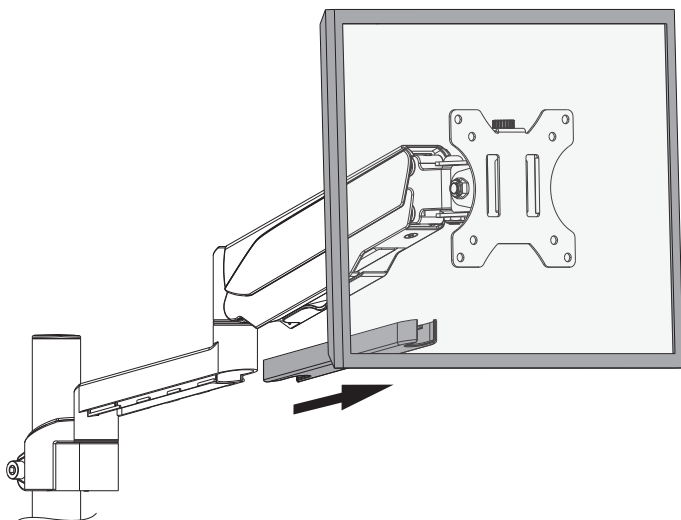

Step 5


Guide the cable through the cable slot and slide the cover back to arm.

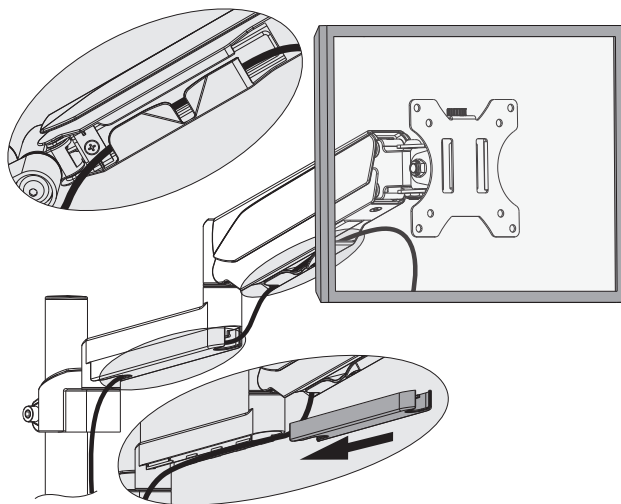

Step 6

Adjust the Gas Spring Tension

- Adjust the gas spring tension with 6mm Allen Key.
- Insert the 6mm Allen Key into the adjusting hole and turn clockwise (-) to reduce gas spring tension, suitable for lighter screens.
- Insert the 6mm Allen Key into the adjusting hole and turn counter-clockwise (+) to increase gas spring tension, suitable for heavier screens.

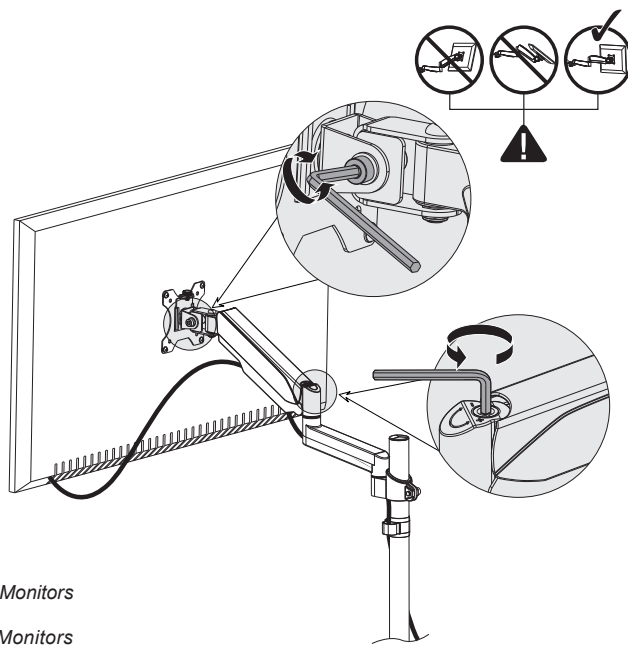


  For Heavier Monitors

  For Lighter Monitors

Step 7

Manually swivel, tilt or rotate the angle for the best operating environment.

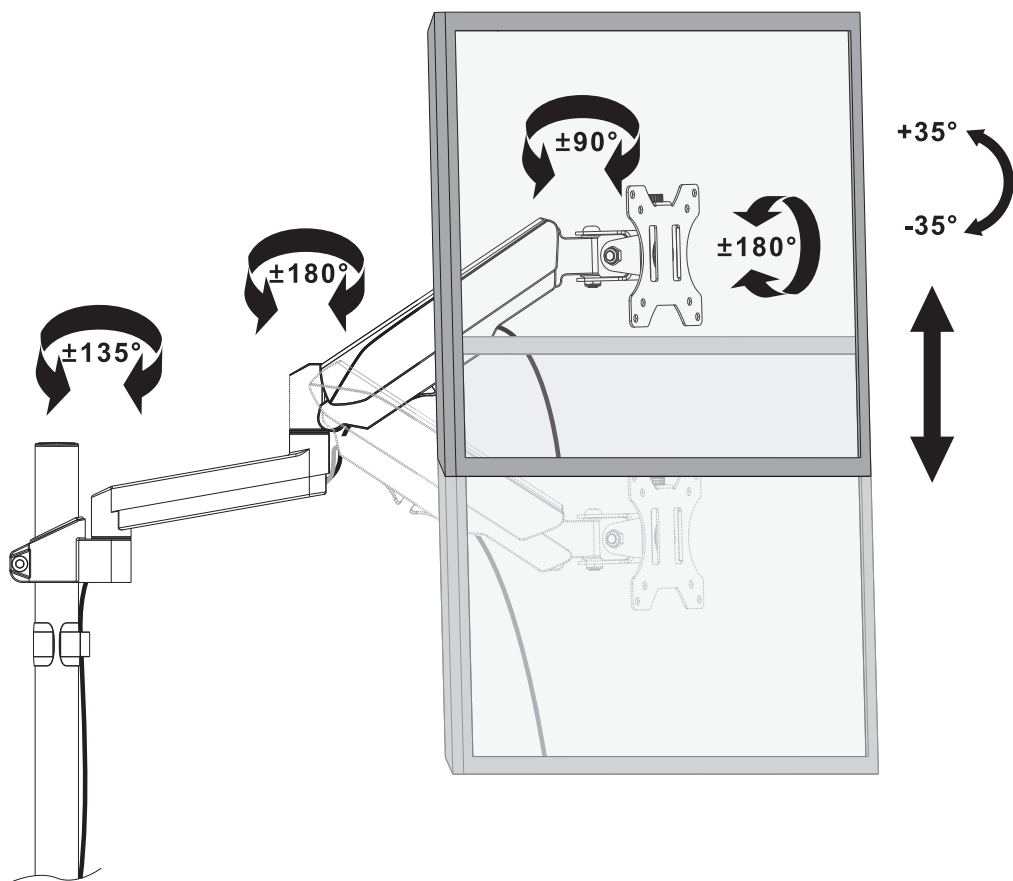



Thank you for choosing us!

We support the technology that brings your home to life.
We offer high quality products, professional customer service,
and extensive technical support.

If you have any questions, please contact us.

📞 1-844-SATTLER (18447288537)

✉️ support@wallielectric.com