



DURALED PRO

Industrial Luminaire



Dimensions in mm

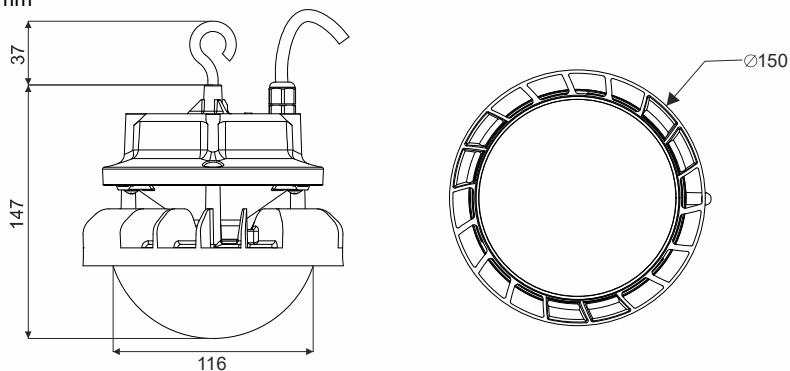

EYEBOLT VERSION (Standard Supply)



CRADLE VERSION

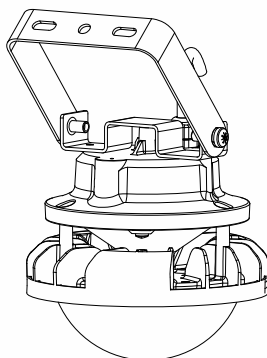

MOUNTING BRACKET DETAILS

Dimensions in mm

Type	: BY202P
Lamp	: LED
Wattage/Voltage	: 35W / 240 VAC, 50 Hz
IP Classification	: IP65
Net Weight	: 850 gm Approx
Max. Projected Area	: 0.016 m ²
CCT	: 6500K, 4000K
Application	: Indoor/ Under coverd area

IP65

**ta
45°**



All the pictures in the MI sheet are representative only and may vary from the Actual Product.

- 1.** Take the luminaire out of the packing box





Fig. 1

- 2.** For External wire connection use Junction Box of IP rating 65 or higher(Not part of supply)

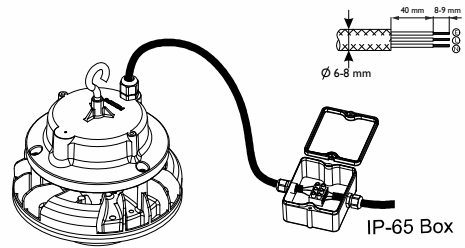

Notice: Ensure Correct connection for polarities

Fig. 2

3. ADDITIONAL SAFETY PROVISION

Safety chain can be fixed using a M4 screw, washer & nut at the location shown below. (Safety Chain & Screws are not part of luminaire supply)


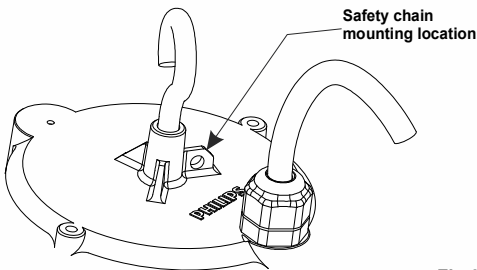


Fig.3

- 4.** Luminaire orientation must always be **facing downwards**(as shown) irrespective of fixation position of Bracket.

Allowed Variation: $\pm 10^\circ$

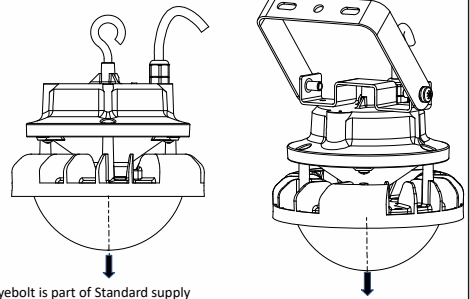

*Eyebolt is part of Standard supply

*Cradle assembly and associated fasteners are not part of standard supply

Fig. 4

CAUTION

1. Ensure L-N-E is connected in right manner.
2. 3 Core cable should be properly connected with ground.
3. Product should be operated between 120-270V A.C.
4. Luminaire must be brought down from the mounting position for maintenance.
5. In case the Diffuser is found broken/damaged luminaire should not be powered on and it has to be replaced before using the luminaire.
6. The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire shall be replaced.
7. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the Driver shall be replaced.
8. Warranty Void if Earthing wire not connected properly with ground.
9. Warranty Void if used in outdoor applications

FAILURE OF PRODUCT DUE TO NON COMPLIANCE TO ANY OF THE ABOVE, VOIDS WARRANTY OF PRODUCT.

All the pictures in the MI sheet are representative only and may vary from the Actual Product.