


USB High-Definition Live Camera

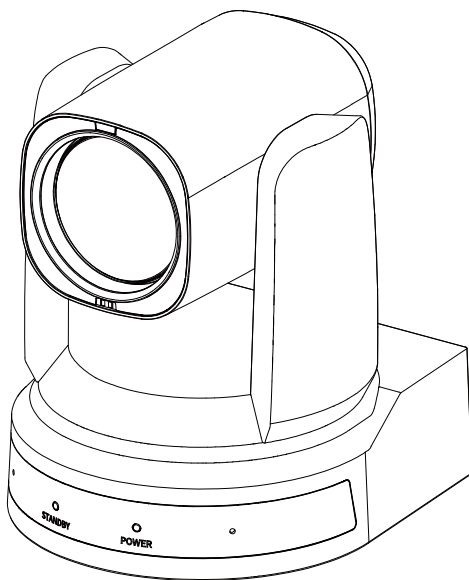

User Manual English (V1.0)

Copyright Notice

All contents of this manual, whose copyright belongs to our Corporation cannot be cloned, copied or translated without the permission of the company. Product specifications and information which were referred to in this document are for reference only. We may change, delete, or update any content at any time and without prior notice.



This is class A production. Electromagnetic radiation at specific frequencies may affect the image quality of TV in home environment.

Catalogue

1	Note	1
2	Packing List	1
3	Quick Start.....	1
4	About Product.....	2
4.1	Features	2
4.2	Specifications	2
4.3	Interfaces and Keys.....	4
4.4	Dimension.....	4
4.5	Installation	5
4.6	Remote Control	6
5	GUI Settings.....	7
5.1	MENU	7
5.2	EXPOSURE	7
5.3	COLOR.....	8
5.4	IMAGE	8
5.5	P/T/Z	8
5.6	NOISE REDUCTION	9
5.7	SETUP	9
5.8	COMMUNICATION SETUP.....	9
5.9	RESTORE DEFAULT	9
6	WEB Settings	10
6.1	Visit Camera.....	10
6.2	Control Camera	10
6.3	Video Settings.....	11
6.4	Image Settings.....	12
6.5	Audio Settings	12
6.6	System Settings.....	12
6.7	Network Settings.....	13
6.8	Device Information.....	14
6.9	Download the Upgrade Program	14
7	Troubleshooting	14

1 Note

- During the installation and operation, all electrical safety regulations of the country and region of use must be strictly observed.
- Please use the power adapter that comes standard with this product.
- Do not connect multiple devices to the same power adapter (exceeding capacity of the adapter may generate excessive heat or cause fire).
- Do not rotate the camera by hand, otherwise it may cause mechanical failure.
- When installing this product on a wall or ceiling, make sure the device securely and there are no obstacles within the rotation range; Do not power on until all installations are completed.
- To avoid heat build-up, please keep smooth ventilation around the device.

- If the device smokes, smells, or makes noises, please turn off the power and unplug the power cord immediately, then contact the dealer in time.
- This device is not waterproof, please keep the device dry.
- This product has no user serviceable parts, damage caused by disassembly by the user is not covered by the warranty.



Notice


Specific frequencies of electromagnetic field may affect the image of the camera!

2 Packing List

Name	Quantity
Camera	1
Power Adapter	1
USB Cable	1
Remote Control	1
User Manual	1

3 Quick Start

- 1) Please check connections are correct before starting.

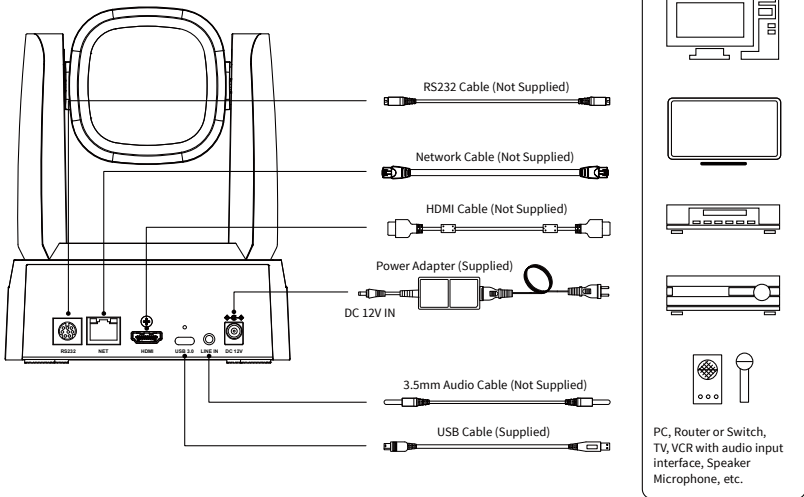

- 2) Connect the power adapter to the power connector on the rear panel of the camera. The power indicator on the front panel of the camera turns on.
- 3) After the camera is powered on, it starts to initialize, right up to the limit position, and then both horizontal and vertical go to the middle position. When the motor stops running, it means that the initialization is completed. (Note: If preset 0 is saved, PTZ will move to preset 0)

4 About Product

4.1 Features

● Full Function USB Interface

Full function USB interface, compatible with USB 3.0 and USB 2.0, support video and encoding image output, support the UVC V1.1 and UAC 1.0 protocol.

● 1080P Full HD

High-quality 1/2.8-inch HD CMOS sensor with 2.07 million effective pixels for high-quality images up to 1920x1080. The output frame rate is up to 60fps/s to present clear and realistic high-definition video and vividly showing the expressions and movements of the characters.

● 72.5° Wide-angle Lens

Exclusively customized 72.5° high-quality ultra-wide-angle lens, support 12x optical zoom.

● Low Illumination

The new CMOS image sensor with ultra-high SNR can effectively reduce the image noise under low illumination. The application of 2D and 3D noise reduction algorithm greatly reduces the image noise even under the condition of ultra-low illumination, it keeps the picture clean and clear, and the SNR of image is as high as 55dB.

● Remote Control

Camera can be controlled remotely through the RS232 serial port.

● Leading Auto Focus Technology

Using advanced focusing algorithm and TOF module assists focusing, the lens can focus quickly, accurately and stably.

● Multiple Interfaces

Support audio and video output through HDMI, USB 3.0 and network interface.

● Portrait

Support portrait output.

● Two Power Supply Modes

Simultaneously support USB 5V and DC 12V power supply.

● Easy to Use

No need to download the driver, USB output plug and play to take a convenient and simple user experience.

4.2 Specifications

Camera	
Signal System	1080P60, 1080P50, 1080P30, 1080P25, 720P60, 720P50
Sensor	1/2.8 inch, CMOS, Max Effective Pixel: 2.07M
Scanning Mode	Progressive
Lens	12x, f = 3.5mm ~ 42.3mm, F1.8 ~ F2.8
Minimum Illumination	0.5 Lux @ (F1.8, AGC ON)
Shutter	1/30s ~ 1/10000s
White Balance	Auto, Indoor, Outdoor, One Push, Manual, VAR
Backlight Compensation	Support
Digital Noise Reduction	2D&3D Digital Noise Reduction
Signal Noise Ratio	≥55dB
Horizontal Angle of View	72.5° ~ 6.9°
Vertical Angle of View	44.8° ~ 3.9°
Horizontal Rotation Range	±170°
Vertical Rotation Range	-30° ~ +90°
Pan Speed Range	2.7° ~ 35.7°/s
Tilt Speed Range	2.7° ~ 31.5°/s



H & V Flip	Support
Image Freeze	Support
Number of Preset	255
Preset Accuracy	0.1°

USB Features

Operate System	Windows 7, Windows 8, Windows 10, Mac OS X, Linux, Android
Color System/ Compression	YUY2/MJPEG
Video Format	● YUY2: 1080P@30fps (max.) ● MJPEG: 1080P@30fps (max.)
USB Audio	UAC1.0
USB Video Communication Protocol	UVC 1.1
UVC PTZ	Support

Network Features

Video Compression	H.264/ MJPEG
Video Stream	First/Second Stream
First Stream Resolution	1920x1080, 1280x720
Second Stream Resolution	1280x720, 640x360
Bit Rate for First Stream	32Kbps ~ 20480Kbps
Bit Rate for Second Stream	32Kbps ~ 6144Kbps
Bit Rate Control	CBR, VBR
Frame Rate	50Hz: 1fps ~ 50fps, 60Hz: 1fps ~ 60fps
Audio Compression	AAC
Audio Bit Rate	96Kbps, 128Kbps, 256Kbps
Protocols	TCP/IP, HTTP, RTSP, RTMP(S), ONVIF, DHCP, Multicast, etc.

Input/Output Interface


LINE IN Interface	1 x LINE IN: 3.5mm Line In Interface
Communication Interface	1 x RS232 IN: 8pin Min DIN, Max Distance: 30m, Protocol: VISCA/Pelco-D /Pelco-P
Network Interface	1 x NET: 10M/100M Adaptive Ethernet Port
USB Interface	1 x USB 3.0: Type C
HDMI Interface	1 x HDMI: Version 1.4b
Power Jack	JEITA type (DC IN 12V)/ USB Type-C (DC IN 5V)

Physical Parameter

Input Voltage	DC 12V/USB 5V
Input Current	12V 1.0A (max.)/ 5V 1.5A (max.)
Operating Temperature	-10°C ~ 40°C
Storage Temperature	-40°C ~ 60°C
Power Consumption	12W (max.)
Dimension (mm)	142.2 x 151.9 x 175.8
Net Weight	1.5Kg






4.3 Interfaces and Keys

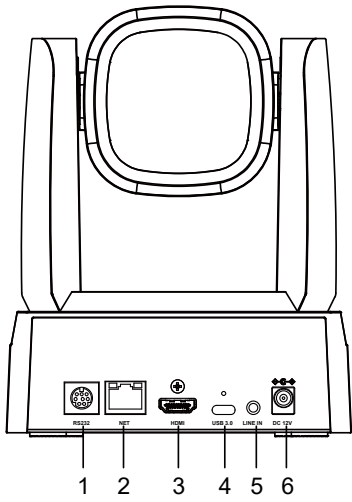


Item	Name
1	RS232 Interface
2	Network Interface
3	HDMI Interface
4	USB 3.0 Interface
5	LINE IN Interface
6	DC 12V Interface

4.4 Dimension

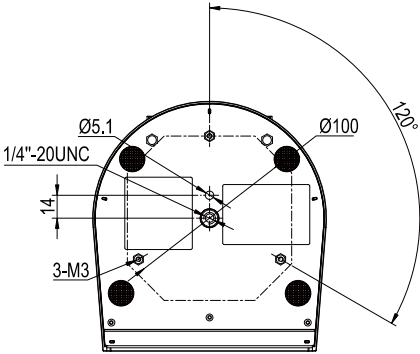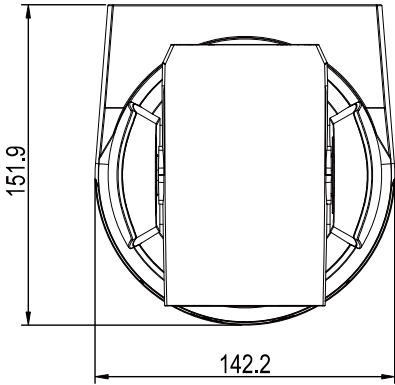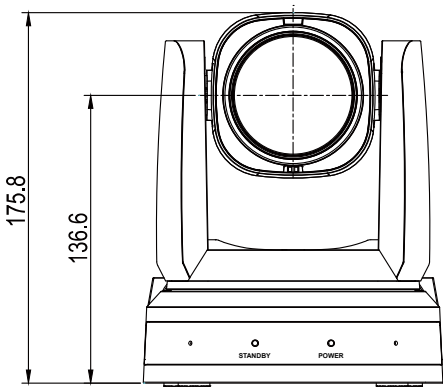


4.5 Installation

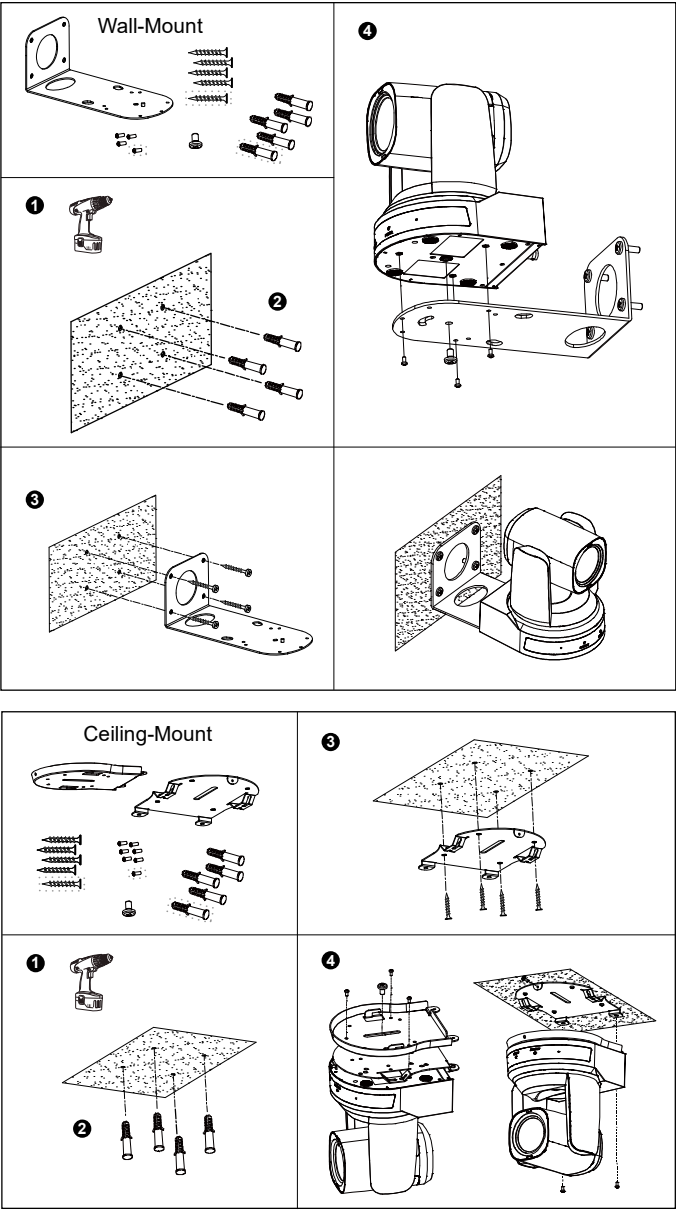

Note The installation diagram is for reference only. The brackets and screws are not standard. For packing accessories, please refer to the actual product.

4.6 Remote Control

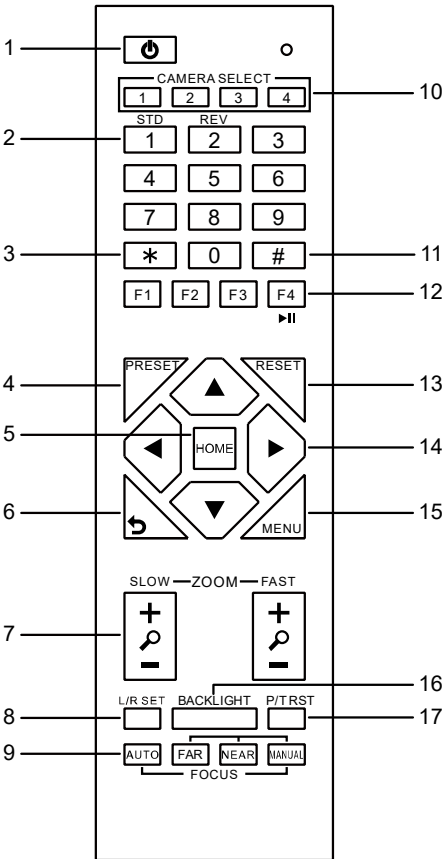

Key Description

1. ⏻ (Standby) Key

Press to enter standby mode. Press again to resume to normal mode.

Note: The power consumption in standby mode is approximately half of that in normal mode.

2. Number Key

To set preset or call preset.

3. * Key

Use with other keys.

4. PRESET Key

Set preset: Store a preset position.

[PRESET] + Number key (0-9): Set a corresponding preset position.

5. HOME Key

Confirm selection or press to turn PTZ back to the middle position.

6. ↶ (Return) Key

Press to return to the previous menu.

7. ZOOM Key

- SLOW: Zoom In [+] or Zoom Out [-] slowly.
- FAST: Zoom In [+] or Zoom Out [-] fast.

8. L/R SET Key

Press with 1 or 2 key to set the direction of the Pan-Tilt.

- Simultaneously press L/R SET + 1 [STD]: Set the Pan-Tilt turn the same direction as the PTZ control key.
- Simultaneously press L/R SET + 2 [REV]: Set the Pan-Tilt turn the opposite direction as the PTZ control key.

9. FOCUS Key

Focus adjustment:

Press [AUTO] to adjust the focus automatically.

Press [MANUAL] to adjust the focus manually.

When in manual focus mode, press [FAR] to focus on far object or [NEAR] to focus on near object.

10. CAMERA SELECT Key

Camera selection:

Press to select and control the camera.

11. # Key

Use with other keys.

12. IR Remote Control Key

[*] + [#] + [F1]: Address 1

[*] + [#] + [F2]: Address 2

[*] + [#] + [F3]: Address 3

[*] + [#] + [F4]: Address 4

13. RESET Key

Clear the preset position:

[RESET] + Number key (0-9).

Or: [*] + [#] + [CLEAR PRESET]: Erase all the preset individually.

14. PTZ Control Key

Press arrow button to perform panning and

tilting. Press [HOME] button to face the camera back to front.

15. MENU Key

Enter or exit OSD MENU.

16. BACKLIGHT Key

Backlight ON/OFF: Press repeatedly to enable or disable the backlight compensation.

NOTE:

- Effective only in auto exposure mode.
- If there is a light behind the subject, the subject will become dark, press the backlight key to enable the backlight compensation. Press again to disable this function.

17. P/T RST (PTZ Reset) Key

Press to preset Pan/Tilt self-test.

Image Freezing Function

- Manual freeze: Press the [F4] key to open the freezing function, “Freeze” will be displayed on the left upper corner. To cancel the freeze function, press [F4] key again, “Unfreeze” shows on the left upper corner and it will be disappeared automatically five seconds later.
- Image freeze when recalling the preset: After enable the “Image Freeze” function by the OSD menu setting, the screen will remain the previous image when recalling the preset. The screen will switch to the preset image after the camera turn to the preset position.


Shortcut Set

[*] + [#] + [1]: OSD menu default English
 [*] + [#] + [3]: OSD menu default Chinese
 [*] + [#] + [4]: Display current IP address
 [*] + [#] + [6]: Quickly recover the default
 [*] + [#] + [8]: Check the camera version
 [*] + [#] + [9]: Quickly set up inversion
 [*] + [#] + [MANUAL]: Restore to default IP address.

5 GUI Settings


5.1 MENU

Press [MENU] key to display the main menu. Use the arrow key to move the cursor to desired item and press the [HOME] key to confirm to enter the corresponding sub-menu.

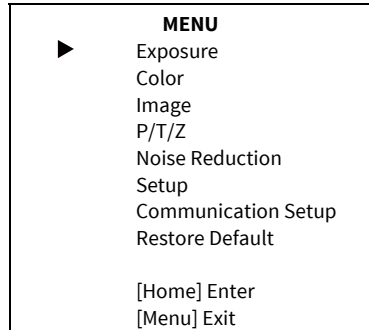

5.2 EXPOSURE

When in main menu page, move the cursor to [Exposure] and press [HOME] key to confirm to enter the exposure page as below.

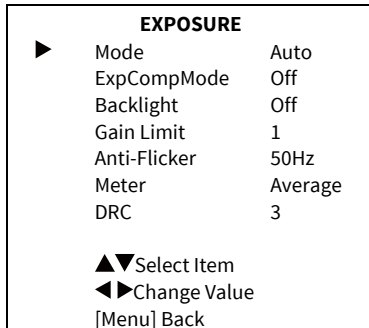

Mode: Auto, Manual, SAE, AAE, Bright.

ExpCompMode: On, Off (Effective only in Auto mode).

ExpComp: -7 ~ +7 (Effective only in ExpCompMode item to On).

Backlight: On, Off (Effective only in Auto mode).

Bright: 0 ~ 17 (Effective only in Bright mode).

Gain Limit: 0 ~ 15 (Effective only in Auto, SAE, AAE, Bright mode).

Anti-Flicker: Off, 50Hz, 60Hz (Effective only in Auto, AAE, Bright mode).

Meter: Average, Center, Smart, Top (Effective only in Auto, SAE, AAE, Bright mode).

Iris: F1.8, F2.0, F2.4, F2.8, F3.4, F4.0, F4.8, F5.6, F6.8, F8.0, F9.6, F11.0, Close (Effective only in Manual, AAE mode).

Shutter: 1/30, 1/40, 1/50, 1/60, 1/70, 1/80, 1/90, 1/100, 1/110, 1/120, 1/130, 1/140, 1/150, 1/160, 1/170, 1/180, 1/190 (Effective only in Manual, SAE mode).

Gain: 0 ~ 7 (Effective only in Manual mode).

DRC: 0 ~ 8.

5.3 COLOR

When in main menu page, move the cursor to [Color] and press [HOME] key to confirm to enter the color page as below.

COLOR		
▶	WB Mode	Auto
	RG Tuning	0
	BG Tuning	+1
	Saturation	100%
	Hue	7
	AWB Sens	High
▲▼Select Item		
◀▶Change Value		
[Menu] Back		

WB-Mode: Auto, Indoor, Outdoor, One Push, Manual, VAR.

RG Tuning: -10 ~ +10 (Effective only in Auto, One Push and VAR mode).

BG Tuning: -10 ~ +10 (Effective only in Auto, One Push and VAR mode).

Saturation: 60% ~ 200%.

Hue: 0 ~ 14.

RG: 0 ~ 255 (Effective only in Manual mode).

BG: 0 ~ 255 (Effective only in Manual mode).

AWB Sens: High, Middle, Low (Effective only in Auto, One Push mode).

Color Temp: 2500K ~ 8000K (Effective only in VAR mode).

5.4 IMAGE

When in main menu page, move the cursor to [Image] and press [HOME] key to confirm to enter the image page as below.

IMAGE		
▶	Luminance	7
	Contrast	7
	Sharpness	5
	Flip-H	Off
	Flip-V	Off
	B&W-Mode	Off
	Gamma	EXT
	Style	Default
▲▼Select Item		
◀▶Change Value		
[Menu] Back		

Luminance: 0 ~ 14.

Contrast: 0 ~ 14.

Sharpness: Auto, 0 ~ 15.

Flip-H: On, Off.

Flip-V: On, Off.

B&W-Mode: On, Off.

Gamma: EXT, Default, 0.45, 0.5, 0.56, 0.63.

Style: Default, Beauty, Jewelry.

5.5 P/T/Z

When in main menu page, move the cursor to [P/T/Z] and press [HOME] key to confirm to enter the P/T/Z page as below.

P/T/Z		
▶	SpeedByZoom	On
	AF-Zone	Front
	AF-Sense	High
	Display Info	On
	Image Freeze	Off
	Call Preset Speed	22
	Pre Zoom Speed	5
▲▼Select Item		
◀▶Change Value		
[Menu] Back		

SpeedByZoom: On, Off.

AF-Zone: Front, Top, Center, Bottom.

AF-Sense: Low, Normal, High.

Display Info: On, Off.


Image Freeze: On, Off.

Call Preset Speed: 1 ~ 24.

Pre Zoom Speed: 0 ~ 7.

5.6 NOISE REDUCTION

When in main menu page, move the cursor to [Noise Reduction] and press [HOME] key to confirm to enter the noise reduction page as below.




NR2D Level (2D Noise Reduction): Auto, Off, 1 ~ 5.

NR3D Level: (3D Noise Reduction): Auto, Off, 1 ~ 8.

5.7 SETUP

When in main menu page, move the cursor to [Setup] and press [HOME] key to confirm to enter the setup page as below.

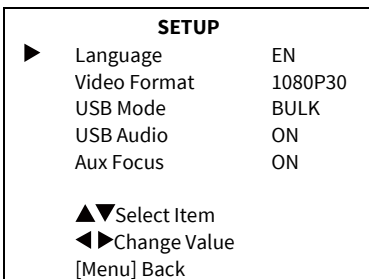

Language: EN, Chinese.

Video Format: 1080P30.


USB Mode: BULK, ISOC.

USB Audio: On, Off.

Aux Focus: On, Off.

5.8 COMMUNICATION SETUP

When in main menu page, move the cursor to [Communication Setup] and press [HOME] key to confirm to enter the communication setup page as below.



Protocol: Auto, VISCA, PELCO-D, PELCO-P.

V_Address: 1 ~ 7 (Effective only in Auto, VISCA protocol).

V_AddrFix: On, Off (When set to On, useless in 88 30 01 FF Command. Effective only in Auto, VISCA protocol).

P_D_Address: 0 ~ 254 (Effective only in Auto, PELCO-D protocol).


P_P_Address: 0 ~ 31 (Effective only in Auto, PELCO-P protocol).

Net Mode: Serial, Paral (Effective only in Auto, VISCA protocol).

Baudrate: 2400, 4800, 9600, 38400.

5.9 RESTORE DEFAULT

When in main menu page, move the cursor to [Restore Default] and press [HOME] key to confirm to enter the restore default page as shown in below figure.



Restore: Yes, No.



Note GUI menu and parameters are subject to change without notice.

6 WEB Settings

6.1 Visit Camera

Visit <http://192.168.100.88> to pop up the login window, then input username (default: admin) and password (default: admin). After login, it will show as below:



6.2 Control Camera

All pages include two menu bars:


Real Time Monitoring: Video image displaying with function buttons.

Parameter Setup: Parameter configuring.

A. Video Viewing Window


The video viewing window is same as video resolution, the bigger the resolution, the bigger the playing area. Double click the viewing window to show full screen, double click again, to return to initialized size.

Status bar in viewing window shown as below:



- 1) Video Pause: Click to pause the real-time video, click again to resume.
- 2) Audio Control: Click to adjust the volume or mute.
- 3) Full screen switch button.

B. PTZ Setup

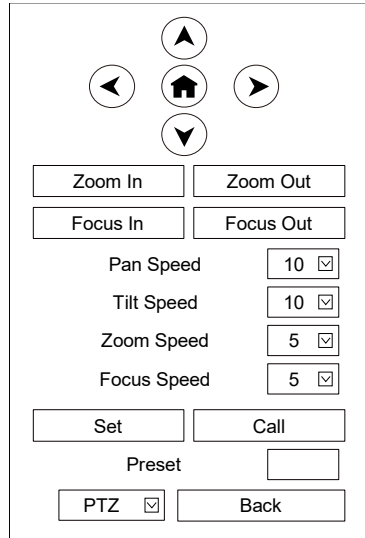

1) Pan and Tilt Control

The direction arrows and home button allow you to manually drive the camera to desired position.

2) Zoom

Zoom In and Zoom Out buttons allow for wide or narrow view of the space.

3) Focus

Focus In and Focus Out button allow for fine manual focus adjustment if the camera has any auto focusing problems on difficult object.

4) PTZ Speeds

Pan speed rate can be set to 1 ~ 24, Tilt speed rate can be set to 1 ~ 20. Zoom and Focus speed rate can be set to 0 ~ 7.

5) PTZ Presets

When the PTZ turns to the position that you would like to return to later, you can set presets for quick recall.

Type a number (0 ~ 254) into the preset box and click "Set" button to save.




When the PTZ turn to other position, input the preset number and click “Call” button to turn the PTZ back to the preset position.

6) PTZ/OSD Dropdown

Move the cursor to dropdown menu, select and click “OSD” to open the on-screen menu and do menu settings on the interface.

C. Language Selection



Click to select “Chinese” or “English” to change the language of the webpage.

6.3 Video Settings

Video Settings

Video Format

50Hz

Encode Level

mainprofile

First Stream

Encode Codec

H264

Resolution

1920x1080

Bit Rate

4096

Frame Rate

25

fps

I Key Frame Interval

25

Bit Rate Control

CBR

Slice Split Enable

Off

Split Mode

Fixed bytes

Slice Size

32

blocks/bytes

Second Stream

Encode Codec

H264

Resolution

640x360

Bit Rate

1024

Frame Rate

25

fps

I Key Frame Interval

25

Bit Rate Control

CBR

Slice Split Enable

Off

Split Mode

Fixed bytes

Slice Size

65535

blocks/bytes

Submit

Cancel

1) Video Format

Support 50Hz (PAL) and 60Hz (NTSC) formats.

2) Encode Level

Support baseline, mainprofile and highprofile.

3) Encode Codec

Support H264 and MJPEG.

4) Resolution

First stream support 1920x1080, 1280x720.

Second stream support 1280x720; 640x360. The bigger the resolution, the clearer the image, and the larger the code stream, the more network bandwidth will be taken.

5) Bit Rate

You can specify the bit rate, the larger the bit rate, the clearer the image. The configuration of the bit rate needs to be combined with the network bandwidth. When the network bandwidth is narrow and the bit rate is configured larger, the video stream cannot be transmitted normally, and the visual effect will be worse.

6) Frame Rate

You can specify the size of the frame rate, the greater the frame rate, the smoother the image; the smaller the frame, the more beating the image.

7) I Key Frame Interval

Set the interval between two I frames, the bigger the interval, the slower the response when opening the image for the first time.

8) Bit Rate Control

Two modes for bit rate control:

CBR (Constant Bit Rate): Video coder will be coding according to the preset speed.

VBR (Variable Bit Rate): Video coder will adjust the speed based on preset speed to gain the best image quality.

9) Slice Split Enable

Enable or disable the Slice Split function.

10) Split Mode

Split Mode Fixed bytes.

11) Slice Size

Size for slice.



6.4 Image Settings



Focus Exposure Color **Image** Noise Reduction Style

Luminance 7

Contrast 7

Sharpness 5

Gamma ☒

Black & White ☒

Flip-H ☒

Flip-V ☒

1) Luminance

Image Bright: 0~14 (Default is 7).

2) Contrast

Image Contrast: 0~14 (Default is 7).

3) Sharpness

Image sharpness: Auto, 0 ~ 15 (Default is 5).

4) Gamma

Options: EXT, Default, 0.45, 0.5, 0.56, 0.63 (Default is EXT).

5) Black & White

Options: Colorful, Black & White (Default is Colorful).

6) Flip-H

Turn on/off the Flip-H function.

7) Flip-V

Turn on/off the Flip-V function.

6.5 Audio Settings

Audio Settings

Audio Switch ☒

Audio Type ☒

Sample Rate ☒

Bit Rate ☒

Input Type ☒

ADTS Options ☒

1) Audio Switch

Enable or disable audio switch.

2) Audio Type

Audio type AAC.

3) Sample Rate

Sample rate 32K.

4) Bit Rate

Bit rate 96K, 128K, 256K selectable.

5) Input Type

Input type LINE IN.

6) ADTS Options

Options: On, Off.

6.6 System Settings

Initialize

Reboot

User

UserName

Passwd ☒

Guest

Passwd ☒

1) Reboot

Click "Reboot" to restart system.

2) Username and Password

Modify the password of username and guest (use letters and Numbers only).

6.7 Network Settings

Lan Settings

IP Configuration Type

Fixed IP Address

☒

IP Address

192.168.100.88

Subnet Mask

255.255.255.0

Gateway

192.168.100.1

DNS Address

8.8.8.8

MAC Address

D4:E0:8E:A9:73:45

Submit

Cancel

Port Settings

HTTP Port

80

RTSP Port

554

TCP Port

5678

UDP Port

1259

Sony Visca

52381

RTMP(S) Settings

First Stream

☐ On
 ☒ Off
 ☐ Video
 ☐ Audio

MRL

rtmp://192.168.100.138/live/stream0

Second Stream

☐ On
 ☒ Off
 ☐ Video
 ☐ Audio

MRL

rtmp://192.168.100.138/live/stream1

SRT Settings

SRT

☐ On
 ☒ Off

SRT Port

4578

SRT Encryption

None

☒

SRT Password

1234567890

RTSP Settings

RTSP Auth

☐ On
 ☒ Off

ONVIF Settings

ONVIF

☐ On
 ☒ Off

ONVIF Auth

☐ On
 ☒ Off

Multicast Settings

Multicast

☐ On
 ☒ Off

Address

224.1.2.3

Port

6688

NTP Settings

NTP Time Sync

☐ On
 ☒ Off

Time Zone

(GMT+08:00) Beijing, Chd

☒

Server Address

cn.ntp.org.cn

Time Interval (min)

1440

Main Time Show

☐ On
 ☒ Off

Position

☒ X
 ☐ 0
 ☐ Y
 ☐ 0

Sub Time Show

☐ On
 ☒ Off

Position

☒ X
 ☐ 0
 ☐ Y
 ☐ 0

Submit

Cancel

1) Lan Settings

The default the IP address is 192.168.100.88, the MAC address cannot be modified.

2) Port Settings

A. HTTP Port

The IP address identifies a network device and multiple network programs can run on the device, each network program uses the network port for data transmission. The port setting on this page is to set up which port the WEB SERVER program uses to transmit. During port mapping, it needs to be consistent with the port number (default is 80).

B. RTSP Port

Set up the RTSP port, default is 554.

C. TCP Port

Set up the TCP port, default is 5678.

D. UDP Port

Set up the UDP port, default is 1259.

E. Sony Visca

Sony Visca 52381.

3) RTMP(S) Settings

Set the MRL of RTMP(S) and select "on", "off", "video" and "audio" functions to enable or disable video and audio in the two streams.

4) SRT Settings

Turn On/Off SRT and set up the SRT Port, Encryption and Password.

5) RTSP Settings

Turn On/Off the RTSP Auth.

6) ONVIF Settings

Turn On/Off the ONVIF and ONVIF Auth.

7) Multicast Settings

Turn On/Off Multicast, set up the Multicast Address (default is 224.1.2.3) and Port (default is 6688; 6688 is the multicast port of the first stream and 6690 is the multicast port of the second stream).

8) NTP Settings

Turn On/Off NTP time sync, Main time show and Sub time show; select the Time Zone; set up the Server address, Time interval and the Time Show Position of the two streams.

6.8 Device Information

Information	
Device ID	HD Camera
Device Type	I3.V
Software Version	SOC v9.8.88 -ARM v7.3.27S
Webware Version	v1.5.5
Submit Cancel	



Note

The above information is for reference only, please refer to the real product for the actual specification.

6.9 Download the Upgrade Program

If you need the camera upgrade program, please contact the manufacturer.



Note

WEB interface and parameters are subject to change without notice.

7 Troubleshooting

Image

- The monitor shows no image
 - 1) Check that the camera power supply is connected, the voltage is normal, and the power indicator is always on.
 - 2) Turn off the power switch to check whether the camera is self-testing.
 - 3) Check the cable of video platform and TV whether in correct connection.
- Image jitters after the camera is properly connected
 - 1) Check whether the camera installation is stable.

- 2) Check whether any vibrating machinery or object near the camera.

- There is no video image in Browser

IE browser does not support H5, you need to use VLC plug-in to view videos. Please visit VLC website (<http://www.videolan.org/vlc>) to download and install the 32-bit VLC media player, after installation, the video image will be displayed normally when visit the camera. Other mainstream browsers already support H5 and do not need to install the VLC plug-in.

- Unable to access camera through Browser

- 1) Using PC to access the network to test that the network access can work properly to eliminate the network fault caused by cable and PC virus until the PC and camera can ping each other.
- 2) Disconnect the network, connect camera with PC separately and reset the IP address of PC if necessary.
- 3) Check that the IP address, subnet mask and gateway settings for camera is correct.
- 4) Check that the MAC address is conflicts.
- 5) Check that the web port is modified, the default setting is 80.

- Forget the IP address or login password

The default IP address is: 192.168.100.88; the default username and password are both: admin.

Control

- Remote control does not work
 - 1) Check and replace with new batteries.
 - 2) Check whether the camera is in normal working mode.
 - 3) Check whether the address key of remote control can match the camera.
- Serial port cannot control
 - 1) Check whether the protocol, address and baud rate of camera are consistent.
 - 2) Check whether the control line is properly connected.



079.79.1101271_V1.0