

Adding camera to the network using mobile phone

This manual refers to Zintronic 'A' & 'P' series.



Table of contents:

Section I - Camera proper connection and configuration via mobile phone

- Connecting camera to the power supply.....
- Connecting via WiFi hotspot to the camera network.....


Section II - Adding camera to the CamHiPro application after connecting with WiFi hotspot.....

- Adding camera to the CamHiPro application.....
- Adding camera to the WiFi home network using CamHiPro application

I. Camera proper connection and configuration via mobile phone



- Connecting camera to the power supply
- Connect camera using cable power supply 12V from the box, as shown on the picture below




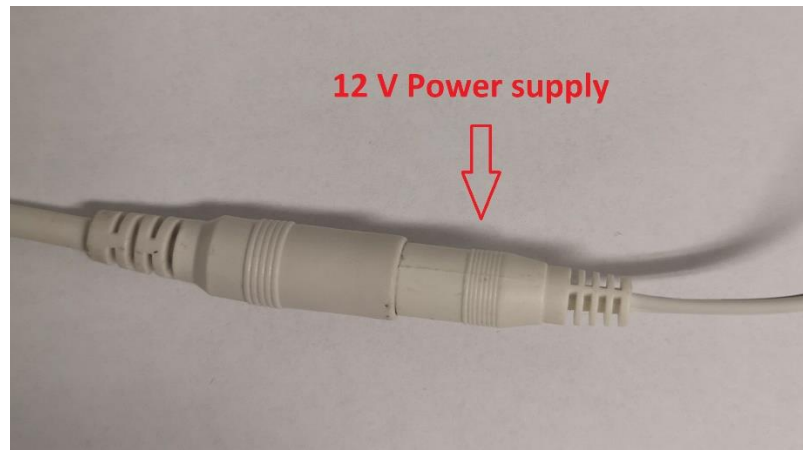

- **Connecting via WiFi hotspot to the camera network:**
 - **A and P camera series are generating their own WiFi network, to add camera we have to go to mobile phone Settings and then check available WiFi networks**
 - **Choose camera network IPCAM-xxxxxx-xxxxxx (where x digits and letters are assign to camera UID)**
 - **Connect with camera WiFi hotspot according to the example as shown on pictures below**
 - **Choose camera WiFi network**
 - **Fill in the password (01234567)**
 - **After connecting choose "Connect anyway?" as "Connect"**
 - **When we do this properly we will see an information „Connected without internet"**



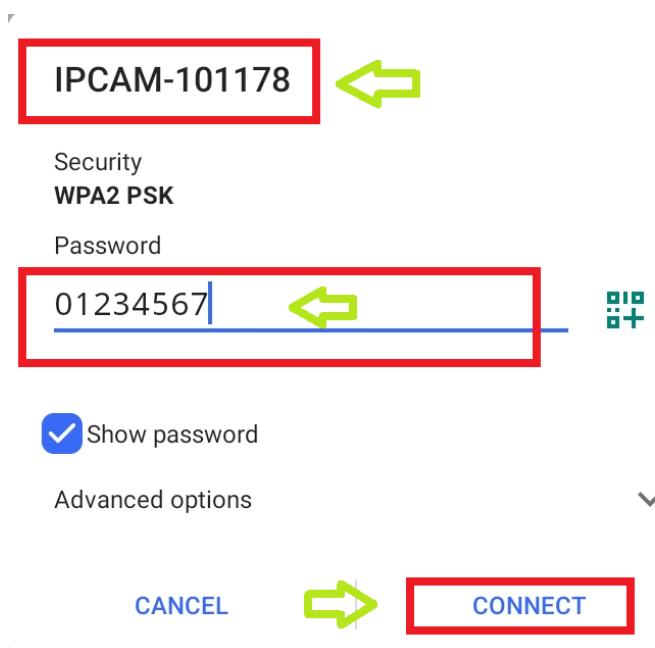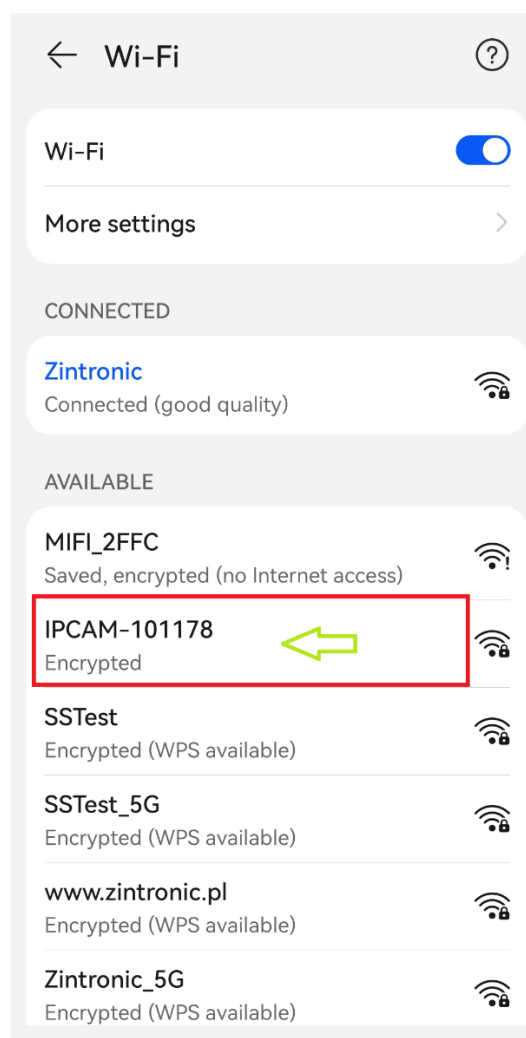


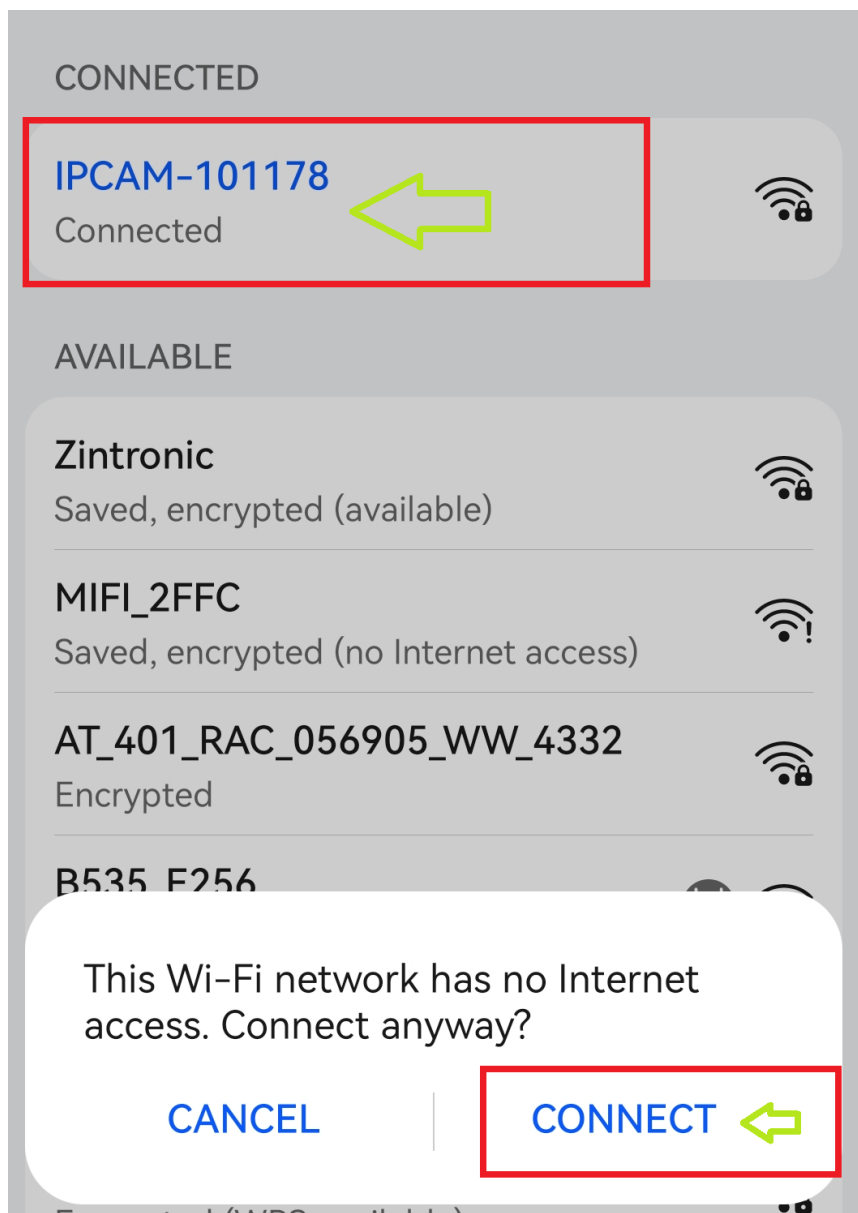


II. Adding camera to the CamHiPro application after connecting with WiFi hotspot


- Adding camera to the CamHiPro application
- Turn on the CamHiPro application
- We click „+” button in the top right corner or “Click Add device” in the middle of the screen (when we have not added any other camera yet)



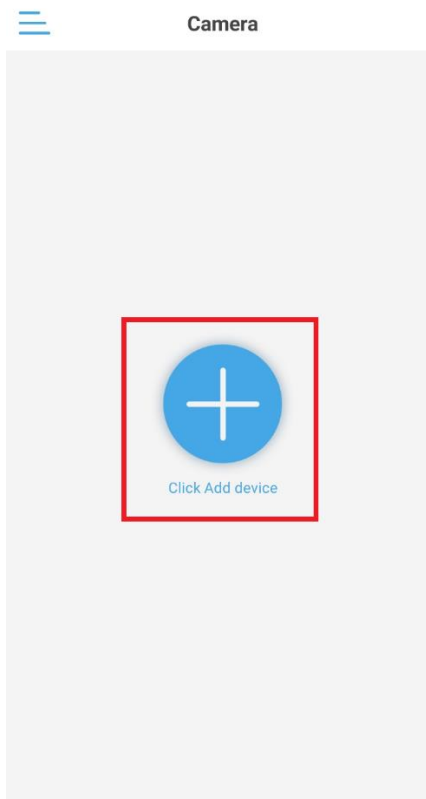

- We choose an option „IP Camera”
- In the next step application will automatically forward us to adding camera to the network, when it will be detected
- It will be shown like on pictures below

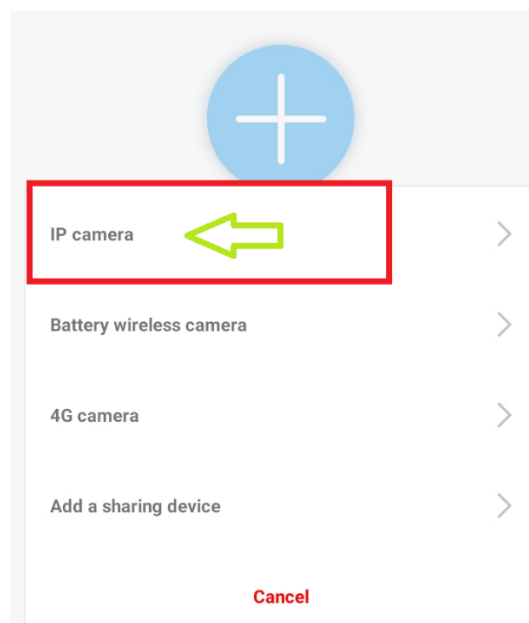

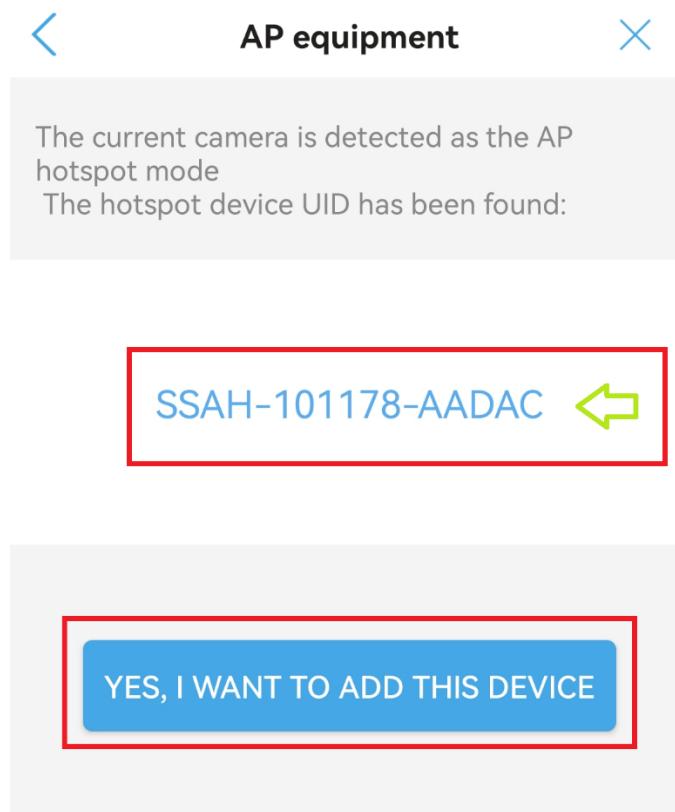

- Choose an option „Yes, I want to add this device”
- It will show UID number of the camera, login and password as default: admin, admin (we don't change anything)
- In the next step click „Add to”



< **Device information** ×

Fill in your device information

UID: SSAH-101178-AADAC ↩

Username: ↩

Password: ↩

ADD TO

- After adding camera configure the WiFi network
- Look for the name of our WiFi local network on the list and select proper one
- Then fill in the password to our WiFi local network
- In the next step accept by clicking „Configure wireless and add”
- Give a name to our camera or we choose one of shown suggestions, then click “Confirm”
- Camera will connect to our WiFi local network and it will stop emulating its own WiFi hotspot



<
Wireless configuration
×

Current device UID: **SSAH-101178-AADAC**

Please choose the WiFi network you use frequently, configure it to the device, so that you can use the camera better every day.

WiFi name:  

WiFi password: 

What are the requirements for wireless devices?

Configure wireless and add

< Not configured yet, add directly >

<
Select wireless

www.zintronic.pl	>
Signal strength: 100%	WPA2_AES
Zintronic 	>
Signal strength: 100%	WPA2_AES
ZintronicSerwis	>
Signal strength: 100%	WPA2_AES
SSTest	>
Signal strength: 100%	WPA2_AES
B535_E256	>
Signal strength: 100%	WPA2_AES
MIFI_2FFC	,



<

Wireless configuration

×

Current device UID:

SSAH-101178-AADAC

Please choose the WiFi network you use frequently, configure it to the device, so that you can use the camera better every day.

WiFi name:

Zintronic

←

🔍

WiFi password:

• • • • • • • • • •

👁️

What are the requirements for wireless devices?

Configure wireless and add

< Not configured yet, add directly >

<

Name setting

×

The device has been added successfully! Give it a name.

name:

Camera

←

quick selection:

Living ro...

Bedroom

Doorway

Baby room

Store

Corridor


Hall

Office


confirm



- After that the CamHiPro application will force password change when we will click on the screen

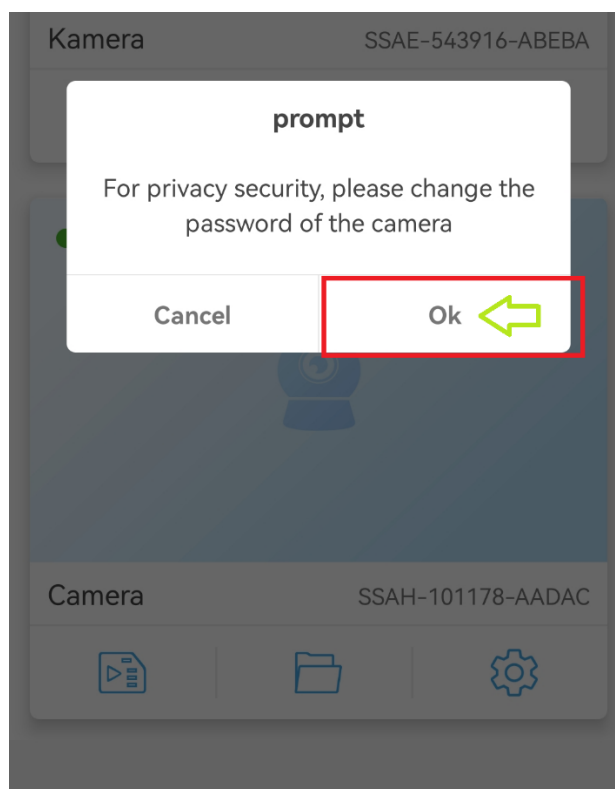


- Click „OK”

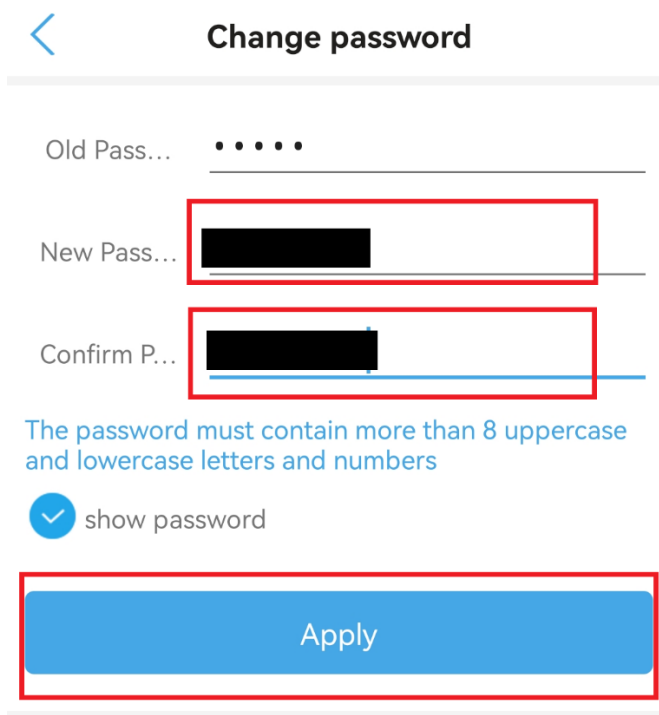

- The old password is admin



- Create your own new password (it has to contain at least 8 characters: at least 1 uppercase letter, lowercase letter and a digit!!!)
- Repeat the new password
- Then click „Apply”.
- After that our camera will be online when we come back to the main menu and view from the camera will be available after clicking on the screen
- Configuration completed!

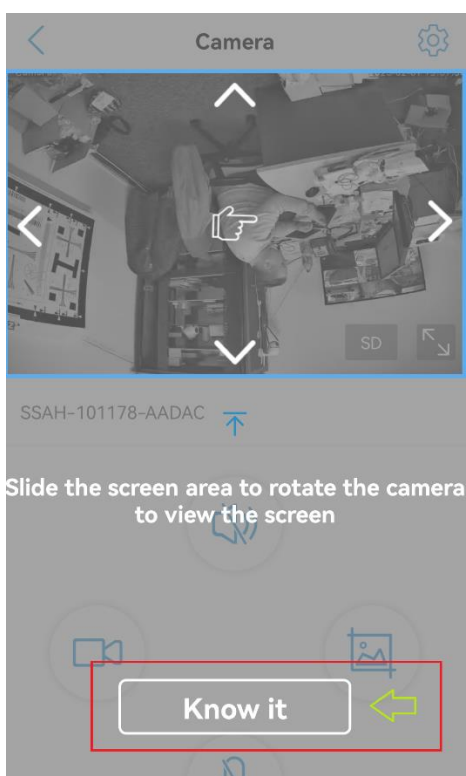

 ul. J. K. Branickiego 31A
15-085 Białystok

 +48 (85) 677 70 55

 biuro@zintronic.pl

zintronic

