



成品尺寸: 100x90mm
展开尺寸: 200x450mm

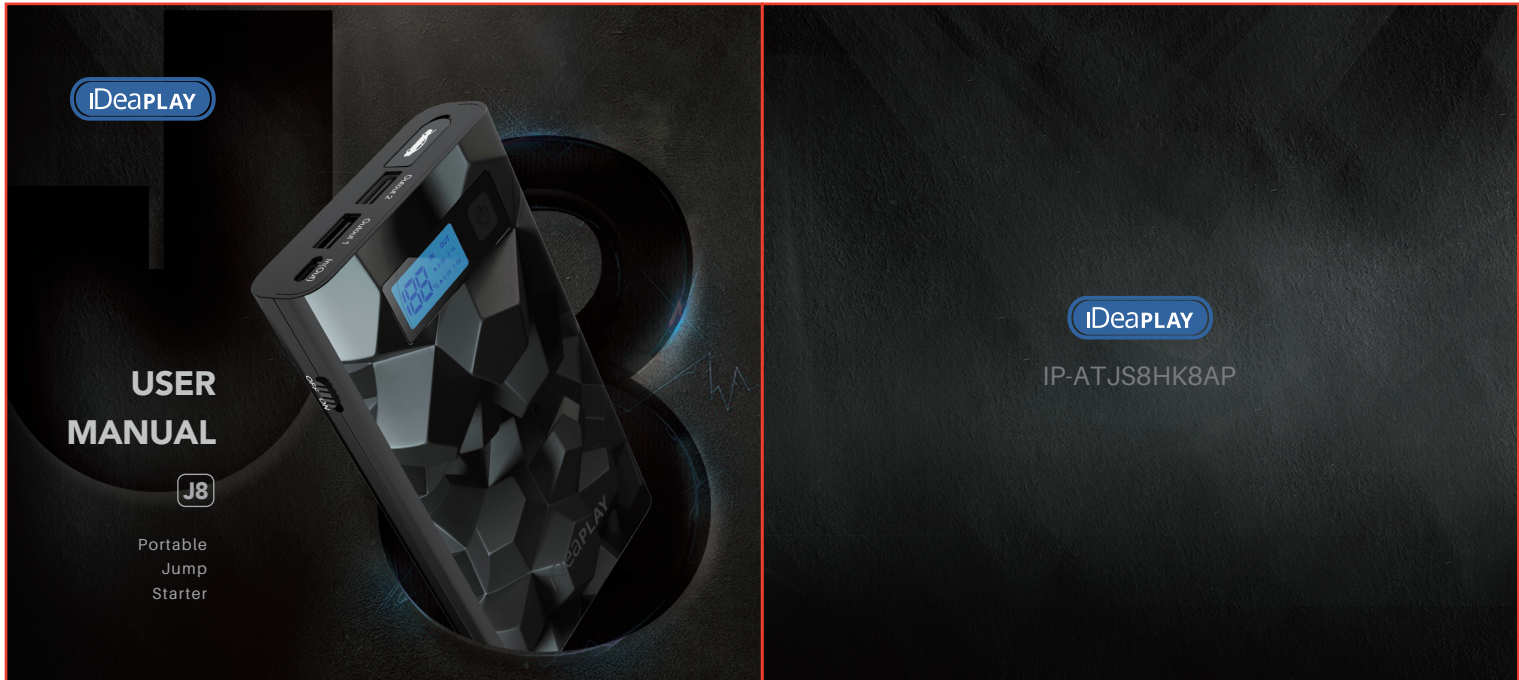

1. PACKAGE CONTENTS

①. IDEAPLAY J8 Jump Starter ②. Hard Shell Case ③. Smart Clamp Cable ④. USB-C Charging Cable ⑤. Cable ⑥. User Manual ⑦. Quick Guide ⑧. Warranty Card

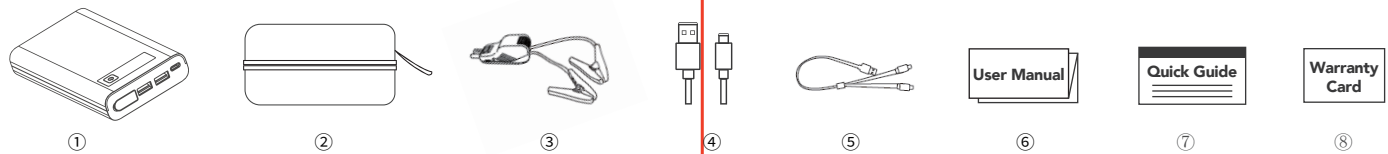

2. WARNING

- ①. If power bank will not be used for an extended period of time, please charge the power bank once every 3 months.
 - ②. Always use the original charger for charging.
 - ③. Avoid exposing the battery pack to heavy knocks or blows.
 - ④. Please use it under environmental temperature 0-45°C/32-113°F and relative humidity 20-70% Rh, Keep far away from moist, hot and fire.

- ⑤. Do not overload the current and voltage, or it may cause discharge, physical or safety issues with the battery cell.
 - ⑥. Do not touch the power bank with wet hands and during charging keep away from combustible materials, such as sheets or blankets.
 - ⑦. Do not disassemble or modify the product. Do not bring the product into contact with water or any other liquids. In the case of electrolytic liquid leakage, overheating or any other peculiar occurrence do not use the power bank.
 - ⑧. Do not expose the product to fire and other heat sources. Do not use power bank with any kind of physical damage as it could result in burning, explosion, and/or generation of toxic gas.
 - ⑨. Do not use the same charging cord to connect input and output on the power bank in case of short circuit.
 - ⑩. Do not charge the product immediately after use or while it is still hot.
 - ⑪. Do not allow the metal teeth of the red clamp to touch the metal teeth of the black clamp.
 - ⑫. Do not use the power bank to recharge your device(s) when the power bank is charging as this may cause damage to the battery of the power bank and shorten its life.
 - ⑬. Pull out the charging head as the charging indicator lights on. Avoid to damage the battery because of long time charging.
 - ⑭. Young children and minors must be under supervision when using the power bank.
 - ⑮. Please don't start the car continuously. If you try to start the car without success please wait 30 seconds before trying again.
 - ⑯. When the battery power of the unit is under 50% please do not attempt to jump start a vehicle.
 - ⑰. If the battery pack heats up after using, please wait for at least 10


minutes before charging it.

- ⑱. Never burn or incinerate this product because it may explode and generate toxic fumes and other potentially harmful chemicals.
- ⑲. Please read the user instruction carefully and use the power bank according to proper guidance. The manufacturer assumes no responsibility for any damages or injury that.
- ⑳. Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- ㉑. If the battery expanded, weeping or has peculiar smell, please stop using it.

3. PRODUCT OVERVIEW

- ①. On/Off Switch ②. Power Button ③. Power Indicator LCD Screen

- ④. Smart Jump Clamps Port ⑤. Output1 ⑥. Output2
⑦. USB-C Input ⑧. LED Flashlight

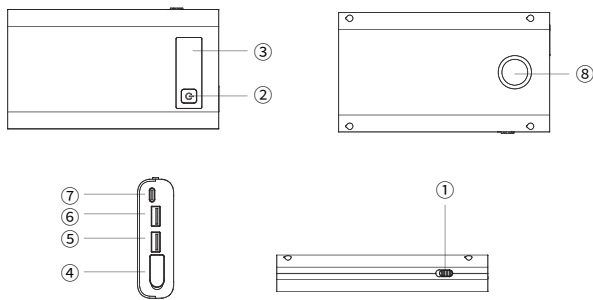

4. LCD DISPLAY

When you turn on the J8 jump starter using the ON/Off switch ① the LCD screen will indicate the remaining charge level.


Out	If the USB Output ports are active, the word "OUT" and the the output current (5V 1A for Output 2 / 5V 2.1A for Output 1) will be displayed on the screen along with the remaining charge.
In	If the USB Input port is active, the word "In" will be displayed on the screen and the remaining charge number will flash.
1-100%	Indicates the % of remaining charge.

Note :
It takes around 3.5~8 hours to fully charge the J8 jump starter. Over-charging is best to be avoided as it may shorten battery life.

5. CHARGING THE JUMP STARTER

Step 1

To charge the J8 jump starter use the USB lead included.



Step 2

Use an adapter to connect the jump starter to a power source. A plug adapter is not included in the package.

Note :
The J8 Jump starter can also be charged from USB power sources such as a laptop or PC.

Attention :


Charging voltage and current of the adapter can't exceed 5V/2A. Don't charge the J8 jump starter immediately after using it to jump start a car or while it is still hot.



6. USING THE FLASHLIGHT

Operating Instruction:
If an automobile cannot be started on its own battery this portable jump starter can be used to apply sufficient charge to aid you in jump starting the vehicle.

Caution :
Ensure the vehicle is in park (for automatic transmission) or neutral (for manual transmission) and the parking brake is applied.
Ensure the product power level is 60% or more.



Step 1 Connect the battery clamp
Check the Jump starter has at least 60% charge. Insert the head of the battery clamp to the Smart Jump Clamps Port.

Step 2 Connect to the automobile
Connect the 12V battery clips to the vehicle,first connect the red (positive) clip to the (+) battery terminal. Then connect the black (negative) clip to the (-) battery terminal.

Note :
If starting the vehicle is unsuccessful the LED light on the battery jumper clamps lead will turn red. If the LED light is not green please disconnect the jump starter, check it has sufficient charge, remove the clips and clamp lead. Then try again from step 1.

Step 3 Start your vehicle
The LED light on the battery jumper clamps lead will turn green if the clips are correctly connected and the J8 jump starter has sufficient charge. Turn the ignition key or press the ignition button to start the vehicle.

Note :

Step 1
Turn on the On/Off switch.

Step 2
Choose a suitable charging cable and insert the cable into the USB output port 1(2) of the jump starter.

Step 3
Insert the other end of the cable into the inputport of the product you wish to charge.

Step 4
Press the power button to start charging your electronic device.

If after 30 seconds you have not started the vehicle, the LED light on the battery clip lead will flash alternately red and green.
If starting the vehicle is unsuccessful, the LED light on the battery jumper clamps lead will turn red.
If the LED light is not green please disconnect the jump starter, check it has sufficient charge, remove the clips and clamp lead. Then try again from step 1.

Step 4 Disconnect the jump starter
After successfully starting the vehicle remove the battery clamp lead from the jump starter.

7. CHARGING ELECTRONIC DEVICES WITH THE USB PORTS



8. USING THE LED FLASHLIGHT

9. SAFETY

FCC Disclaimer
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.
This equipment generates, uses and can radiate radio frequency energy. If it is not installed and used in accordance with the instructions it may cause harmful interference to radio communications. However, there is no guarantee that interference will occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception the user can try to correct the interference by one or more of the following measures:

FCC Disclaimer

- Reorientatings or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for assistance.

10. FCC CAUTION

Any change or modifications to this device not expressly approved by the manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) The device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Declaration of Conformity for EU Countries:

- (1) EMC Directive 2014/30/EU (including amendments).

- (2) Low Voltage Directive 2014/35/EU.
- (3) Red Directive 2014/53/EU (If Product has RF function).

WEEE Disposal Instructions:

DO NOT throw this electronic device into the trash. When discarding, to minimize pollution and ensure utmost protection of the global environment, please recycle it.

11. SPECIFICATION INFO

General	
Product Name	IDEAPLAY J8 Portable Jump Starter
Brand	IDEAPLAY
SKU	IP-ATJS8HK8AP
Model Number	J8
Additional Accessories Included	Smart Clamp Cable, USB-C Charging Cable, Cable

Power	
Input	5V/2A
Output 1	5V/2.1A
Output 2	5V/1A
Start Current:	400A
Peak Current:	800A
Gas Engines:	Up to 7.0L
Diesel Engines:	Up to 5.5L

Dimension	
Product Size	5.7" *3.2" *1"
Product Weight	0.67lb

Features	
Charger Type	USB-C
Output Ports	2
LCD Digital Display	YES
On/Off Switch	YES
Operating Temperature Range:	32 ℉ to 113 ℉
Storage Temperature Range:	23 ℉ to 113 ℉



www.iDeaUSA.com
Made In China

