

KTS-MW3-12V-PKO /X

LED MICROWAVE OCCUPANCY/DAYLIGHT SENSOR

DESCRIPTION

LED Microwave Occupancy/Daylight Sensor | Pre-wired for Quick Installation | Performance Parameters Set by Remote Control (sold separately)

INPUT VOLTAGE: 12Vdc $\pm$ 2Vdc

MICROWAVE FREQUENCY: 5.8 GHz $\pm$ 75MHz

OUTPUT VOLTAGE: 0–10Vdc

TRANSMIT POWER: 1mW max.



PRODUCT FEATURES

- Partial discharge (PD) dual-technology differentiates artificial light brightness from natural light and automatically turns off light when ambient brightness exceeds preset lux level
- Microwave sensing technology detects motion in the coverage area and automatically turns off light when motion is no longer detected
- Pre-wired for quick installation
- Powered by Keystone 0–10V dimming LED driver
- Adjustable performance parameters set by Keystone remote control (sold separately)
- Ambient operating temperature: –25°C/–13°F to 60°C/140°F

PERFORMANCE SPECIFICATIONS

Microwave Frequency	Input Voltage	Input Current	Output Voltage	Transmit Power	Stand-By Power	Max Mounting Height	Detection Angle	Detection Range	Adjustable Settings					
									Brightness	Sensitivity	Hold Time	Daylight Threshold	Stand-By Time	Stand-By Dimming Level
5.8GHz	12Vdc	30mA	0–10V	1mW	<0.5W	33 ft (ceiling mount)	30°–150°	Ceiling mount: $\varnothing$ 33 ft max Wall mount: 35 ft max	70% 80% 90% 100%	20% 50% 75% 100%	10 sec 1 min 10 min 30 min	10 Lux 30 Lux 50 Lux 100 Lux Disable	1 min 30 min 60 min ∞	10% 20% 30% 50%

FACTORY PRESETS


Catalog Number	Stand-By Dim Level	Hold Time	Daylight Threshold	Stand-By Time
KTS-MW3-12V-PKO	50%	10 min	Disabled	∞
KTS-MW3-12V-PKO /A	30%	1 min	Disabled	3 min
KTS-MW3-12V-PKO /B	10%	5 min	Disabled	10 min



KTS-MW3-12V-PKO /X

LED MICROWAVE OCCUPANCY/DAYLIGHT SENSOR

PHYSICAL SPECIFICATIONS

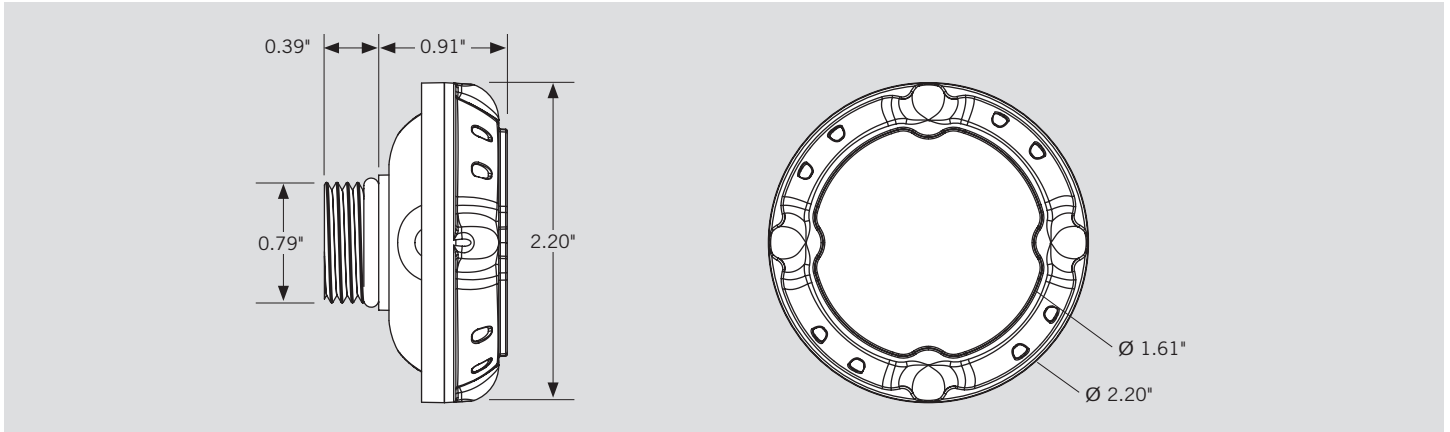


LUX ON/OFF SETTING

FUNCTION

Partial discharge (PD) dual-technology differentiates artificial light brightness from natural light and automatically turns off light when ambient brightness exceeds preset lux level.

Lux-Off function preconditions:

- Stand-by period setting: ∞
- Stand-by dimming level setting: 10%, 20%, 30%, or 50%
- Daylight threshold setting: 10 Lux, 30 Lux, 50 Lux, or 100 Lux

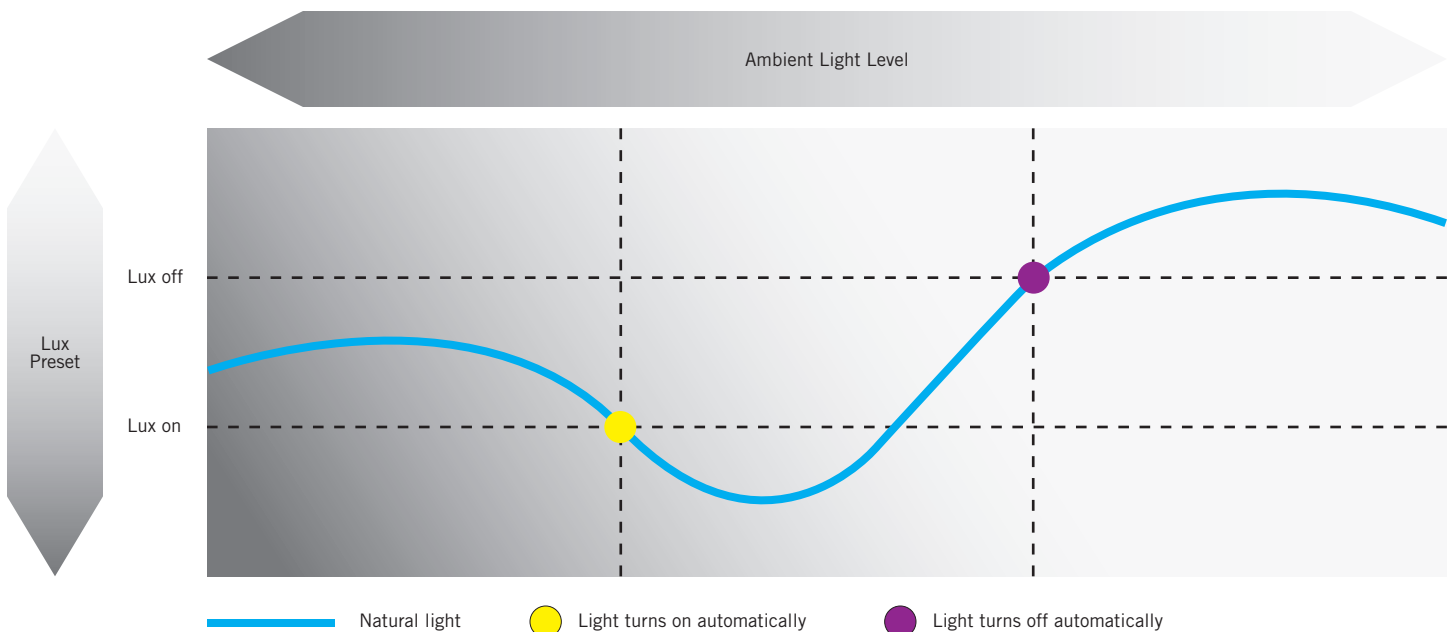



KTS-MW3-12V-PKO /X

LED MICROWAVE OCCUPANCY/DAYLIGHT SENSOR

APPLICATION



When ambient light is lower than preset lux level, lighting will turn on and remain at preset stand-by dimming level.


With insufficient ambient light, when motion is detected, lighting will turn on and remain at preset brightness level until motion is no longer detected for duration of preset hold time.

If no further motion is detected after duration of hold time, lighting will dim and remain at preset brightness level for duration of standby time or until ambient light level exceeds preset lux level.

When ambient light reaches preset lux level, lighting will turn off and remain off until ambient light level falls below preset lux level.

INSTALLATION

- 1. Ensure power is off to the fixture.
 - 2. Remove 1/2" knock-out (KO) plug next to the Keystone emblem on the driver access door.
 - 3. Screw in sensor head.
 - 4. Re-connect power when ready.
- (see illustrations below)

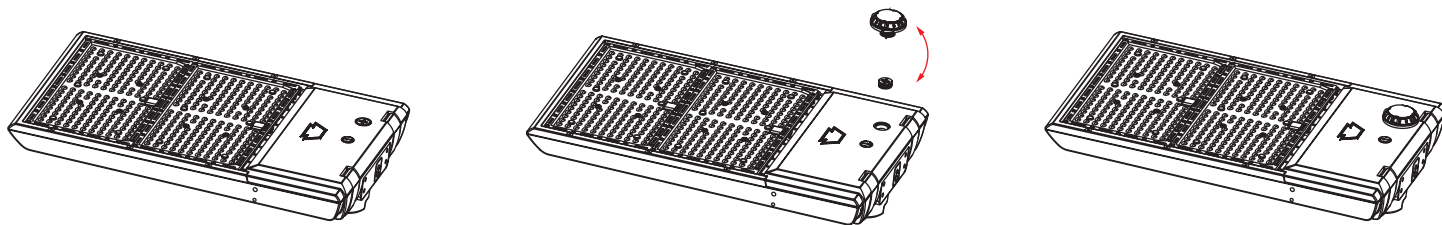

- 5. Program desired settings as needed with Keystone Remote Control.

ACCESSORY (SOLD SEPARATELY)

REMOTE CONTROL

Catalog Number	Description	UPC	Easy Code
KTS-MW3-REMOTECONTROL	Remote Control for KTS-MW3-12V-XX Sensors, Sets/adjusts all sensor performance parameters	843654132020	XSR-61





KTS-MW3-12V-PKO /X

LED MICROWAVE OCCUPANCY/DAYLIGHT SENSOR

ORDERING INFORMATION

ORDER CODE	PACK QTY.	UPC	Easy Code
KTS-MW3-12V-PKO	1	843654135212	TRM-32
KTS-MW3-12V-PKO /A	1	843654133317	XJR-25
KTS-MW3-12V-PKO /B	1	843654133324	SPF-37

CATALOG NUMBER BREAKDOWN

KTS-MW3-12V-PKO /X

- 1 Keystone Technologies Sensor
- 2 Microwave Sensor Form Factor
- 3 Input Voltage—12V
- 4 Pin Connection
- 5 Knock Out
- 6 Preset Configuration Style

6 Preset Configuration Style

Blank	Standard Factory Preset
/A	Factory Preset A
/B	Factory Preset B

