

18W RGB+CCT LED Linear Light

Model No.: LL1-18

Features

The case is made of PC material. Lampshade and lamp body are integrally formed, with anti-fire, waterproof, dustproof, anti-corrosive and anti-UV function. The appearance is simple and stylish.



RGB colors to choose



2.4GHz RF Remote control
Control distance 30m



Color temperature
2700K~6500K



Smartphone APP control
(2.4GHz gateway is needed)



Dim brightness/
Saturation



Support third party voice control
(2.4GHz gateway is needed)



Waterproof and
dustproof grade IP66



Signal transmitting &
Modes synchronization



Beam angle 140°

Parameters

Model No.: LL1-18

Input Voltage: AC100~240V 50/60Hz

Color Temp.: 2700K~6500K

Luminous Flux: 1900LM

Luminous Efficiency: 105LM/W

CRI: >80

Working Temp.: -20~45°C



Beam Angle: 140°

RF: 2.4GHz

Control Distance: 30m

IP Rate: IP66

Made in China

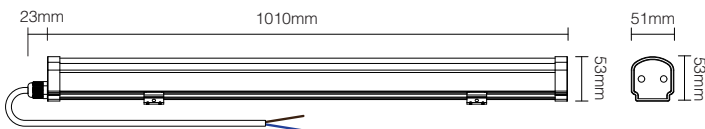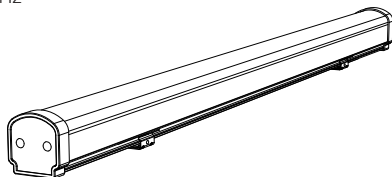


Signal transmitting

One lighting fixture can transmit the signals from the remote control to another lighting fixture within 30m, as long as there is a lighting fixture within 30m, the remote control distance can be limitless.

Modes synchronization

Different lighting fixture can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.



Signal transmitting &
Modes synchronization

Signal transmitting &
Modes synchronization



Linear Light



Linear Light



Linear Light



Distance 30m


Distance 30m

Distance 30m

Dynamic Mode Sheet

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat tuesday	
8	Party	
9	Slow color splash	

Connection Diagram

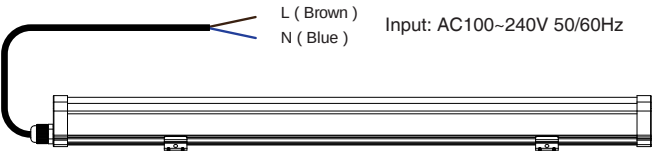

Link/Unlink


Compatible with these remote controls (Purchased separately)



FUT089



FUT088



FUT092



FUT096




B8



B0



B3 / T3



B4 / T4



WL-Box1



Lighting can be working after linking with remote; for more details, pls read the remote instruction.

Attention

1. When installation, Please switch off power, and switch on power after assuring the correct wiring.
2. The light is with waterproof and damp-proof design. Waterproof rate is IP66; it can be working normally in the rain, but cannot work under water.
3. The working temperature is -20~45°C, please do not install the light on the area over 45°C to assure the lifespan.



Signal transmitting & Modes synchronization

Made in China