


Warnings

- Proper configuration of all passwords and other security settings is the responsibility of the installer and/or end-user.
- In the use of the product, you must be in strict compliance with the electrical safety regulations of the nation and region. Please refer to technical specifications for detailed information.
- Input voltage should meet both the SELV (Safety Extra Low Voltage) and the Limited Power Source with 100-240 VAC or 12V DC according to the IEC60950-1 standard. Please refer to technical specifications for detailed information.
- Do not connect several devices to one power adapter as adapter overload may cause overheating or a fire hazard.
- Please make sure that the plug is firmly connected to power socket.
- If smoke, odor or noise rise from the device, turn off the power at once and unplug the power cable, and then please contact the service center.

Lifoarey

Keep life Security
Smart and Simple

Keep life Security, Smart and Simple



Security Analog Camera MANUAL INSTRUCTIONS

FC CE RoHS




Made in China

- Please read the instruction manual carefully before use and keep it for future reference.



Introduce the Cameras

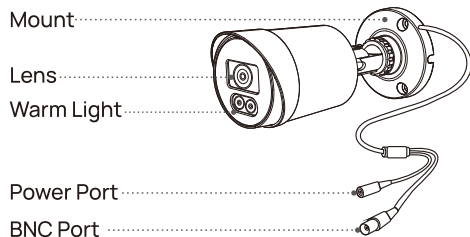

Shutter Time	1/25s(1/30s)~1/100,000s
White Balance	Auto/Manual
AGC	Yes
Operating Conditions	-20°C~+50°C, Humidity 90% or less (non-condensing)
Power Supply	DC12V(±10%)
Weather Proof	IP66

Technical Parameters

Resolution	1080P/4MP/5MP/8MP
Signal System	PAL/NTSC
Effective Pixels	2MP:1920(H)×1080(V) 4MP:2560(H)×1440(V) 5MP:2560(H)×1944(V) 8MP:3840(H)×2160(V)
White Light Range	15~20 m
Video Output Mode	AHD/CVI/TVI/CVBS Optional
Day/Night	Color
Video Frame Rate	1080P:25fps(50Hz),30fps(60Hz) 4MP:25fps(50Hz),30fps(60Hz) 5MP:12.5fps,20fps 8MP:12.5fps,15fps
Led on of Min Illumination	Color: 3 Lux @ (F1.0/F1.6/F2.1, AGC ON) with warm light
S/N Ratio	>520dB


Note: The 1080P analog camera should work with 1080P DVR together.
The 5MP analog camera should work with 5MP DVR together.
This device is only camera without power supply, BNC cable and DVR
The analog camera should work together with 1080P/5MP DVR through BNC cable.

Ceiling Mounting for Camera

Proper configuration of all passwords and other security settings is the responsibility of the installer and/or end-user.

Steps:


- 01/ Drill the screw holes in the ceiling according to the bracket.
- 02/ Connect the corresponding power cable and video cable.
- 03/ Fix the camera to the ceiling with the supplied screws.



Fix Camera to the Ceiling

04/ Adjust the surveillance angle

- 1) Loosen No.3 adjusting screw to adjust the panning position (0° ~ 360°)
- 2) Tighten No.3 adjusting screw.
- 3) Loosen the No.2 adjusting screw to adjust the tilting position (0° ~ 90°)
- 4) Tighten No. 2 adjusting screw
- 5) Loosen No.1 adjusting screw to adjust the azimuth angle of the image (0° ~ 360°)
- 6) Tighten No.1 adjusting screw.

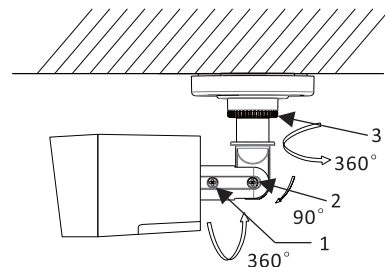

3-axis Adjustment