

USB Type-C DP Alt to HDMI & USB Type-A

General Description

The MCDP5200 is an advanced USB Type-C / DisplayPort1.4a to HDMI converter with an integrated USB type-C de-multiplexer, targeted primarily for Mobile Notebook accessory and display applications. This device functions as a DP to HDMI protocol converter with a HDCP1.x/ HDCP2.x repeater function.

The MCDP5200 has a USB Type C DP Alt mode Upstream Facing Port (UFP), supporting Billboard functionality. The four high speed lanes of UFP can receive DP1.4a MST audio-video and USB3.1 Gen2 data streams simultaneously. The input lane mapping is flexible and meets the USB Type-C connector flip orientation requirements. The incoming DP and USB signals are de-multiplexed, retimed, and transmitted on the Downstream Facing Ports (DFP). The MCDP5200 consists of a USB DFP port with USB3.1 TX and RX pair and an audio-video DFP port configured as DC coupled HDMI/DVI port, each with four high-speed lanes.


Ordering Information

Part Number	Description	IC Package
RD1-5200	MCDP5200 RD1 Evaluation Kit	LFBGA77-169

Detailed functionality of the IC is described in the MCDP5200 datasheet. Included in the kit are the following items:

Item #	Description	Quantity
1	Fully assembled printed circuit board	1
1	Reference Design Evaluation kit manual	1

EVAL Kit Photo

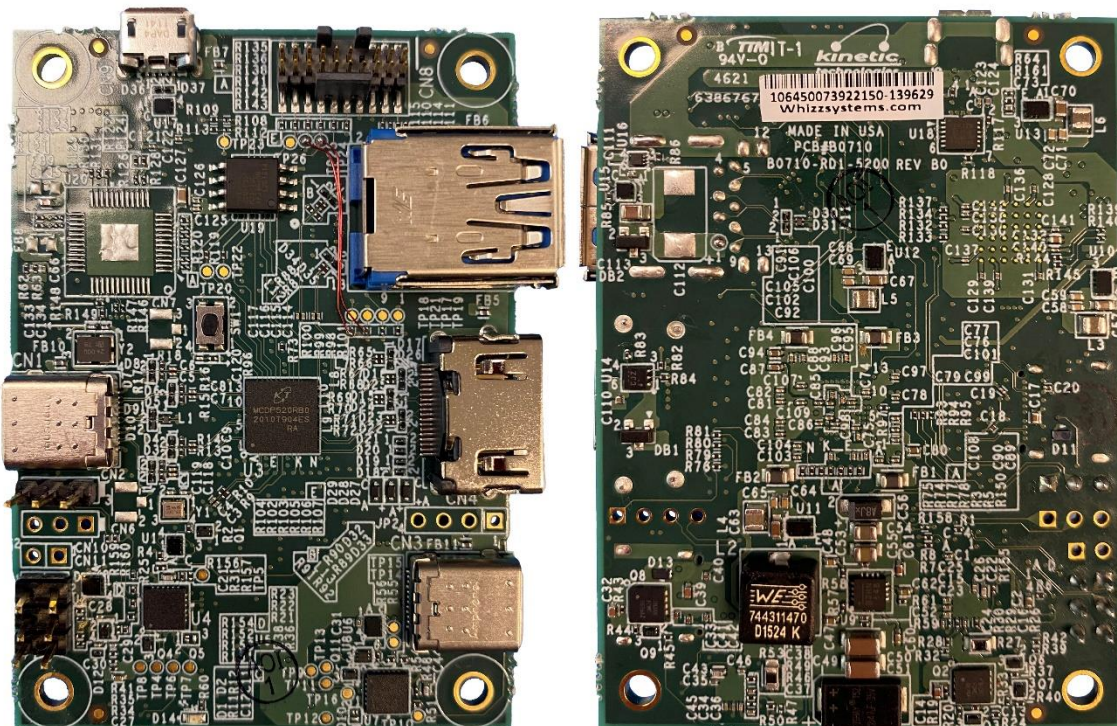

Contents

General Description	1
Ordering Information.....	1
EVAL Kit Photo.....	1
Evaluation Board Features	3
Design Features.....	3
System Overview.....	5
Functional Block Diagram.....	5
Connection Setup.....	6
Diagnosis	6
Connector Layout.....	7
MFP Pin Assignment.....	8
Selected Pin Usage and Assignment	9
UFP Type-C Monitor	9
DDC Monitor for HDMI TX.....	10
I2C Slave	11
SPI Flash & Reset.....	12
Gprobe Header Pins.....	12
Recommended Accessories	13
AC Adapters.....	13
Cables	13
Important Notices.....	15

List of Figures

Figure 1. Functional Block Diagram	5
Figure 2. Connection Setup.....	6
Figure 3. Connector Layout	7
Figure 4. MFP Pin Assignment on the Board Except for High Speed Signal	8

List of Tables

Table 1.Recommended AC Adapter List.....	13
Table 2. Recommended Cable List.....	13

Evaluation Board Features

Design Features

- **DUT: MCDP5200**
- **Board Name: RD1-5200**
- **Power Supply**
 - DC5V Input = Barrel Jack, USB Type-C (5V/3A mode) in alternative use, with over voltage protection (trip voltage 6.2~7.0V)
- **Interfaces**
 - Input: USB Type-C Alt mode support
 - Display Port: 1.62 / 2.74 / 5.4 / 8.1 Gbps, 1 / 2 / 4 lane configuration
 - USB3.2: 5Gbps, 10Gbps x1 operation
 - USB2: (bypassed to DFP)
 - Output: HDMI2.0b with HDMI Type-A Connector as DFP
 - If UFP port is configured as 4L DP mode, then 600 MHz(max) TMDS character clock, 6Gbps(max) can be supported
 - If UFP port is configured as USB3 + 2L DP mode, then up to 540MHz TMDS character clock can be supported. 4k2k60Hz resolution can be achieved in either reduced blanking, YUV420 or with the DSC functionality
 - Output: USB3.2 SSPx1 operation with USB Type-A Connector as DFP
 - 5Gbps/10Gbps
 - CPU Reset: 1x Push switch
 - Charging Port: USB type-C Receptacle
 - Handling voltage can be up to 20VDC as Power Delivery specification.
 - USB PD: Through UFP USB C and DFP USB C (up to 65W) Dual Role
- **Components**
 - MCDP9000 (USB PD3.0 Type-C Port Controller)
 - Small crystal operation: 25MHz with 2016 size (metric)
 - 16Mbit SPI Flash: MX25R1635FM2IH2 (default) or compatibles¹.
 - Protection Circuit²
 - **ESD Diodes on**
 - RX: High Speed Line and AUX/HPD
 - TX1(HDMI): High Speed Line and DDC
 - TX0(USB3 SSP): High Speed Line
 - Pin header of G-Probe Interface (debug use)
 - **Over current protection**
 - 1.5A@VBUS: USB Type-A(DFP)
 - 0.3A@Trip of poly-fuse (resettable fuse): HDMI +5V power supply
 - 1.0A@Trip of poly-fuse: for external G-Probe card
 - External reference resistor: 5.36kΩ ± 1% ohm

1. Contact marketing for details on compatible memory

2. For characterization and validation testing, these can be removed if required



- **VRM Block (Power Distribution Network)**
 - Lower cost components and smaller space
 - DCDC converter circuit compliant with noise requirement ($<20\text{mVpp}$)
 - Self-contained over-current protection circuit
 - Discharging load capacitors
- **Interfaces for debug:**
 - 1x G-Probe Interface on USB Micro-B connector (UART signals can be bypassed to external G-Probe card)
 - 1x JTAG(SWD) interface with J-Link 19pin
 - Trace pins of JTAGE interface are option
 - 1x HDMI DDC pins (DC coupled) on DFP
 - 1x Reference clock output with u-coax connector (Hirose U.FL)
 - 1x Reference clock input path with u-coax connector (Hirose U.FL)
 - 1x 6pin connector for TEST mode and VPP(6V) Power Supply
 - 1x Bootstrap pin header



System Overview

Functional Block Diagram

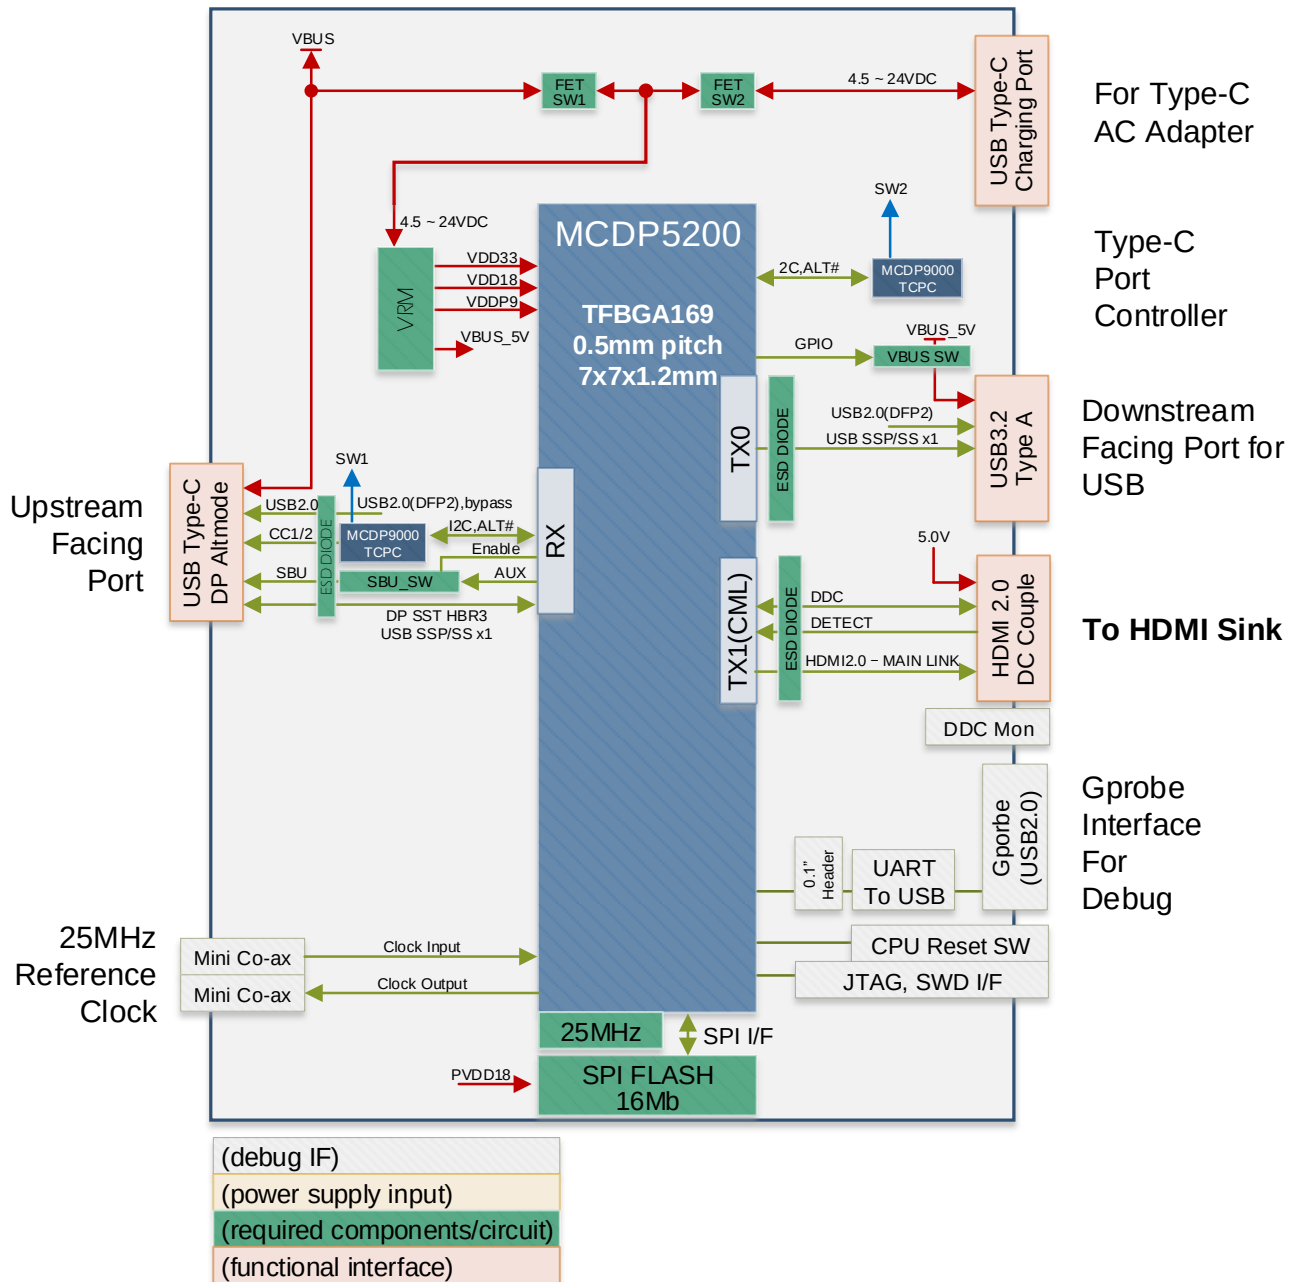


Figure 1. Functional Block Diagram

Connection Setup

- 1) Connect USB Type C cable
- 2) Connect HDMI Cable
- 3) [optional] Connect USB Type C Charging port: MCDP5200 RD1 USB PD (through UFP USB C and DFP USB C Dual Role)
- 4) [optional]: USB3.2 Type A: Downstream Facing Port for USB supports (USB2.0, USB3.x Gen1/Gen2).
- 5) USB Type A-to-C cable can also be used to connect to USBC 2.0 / 3.x Gen1/Gen2 devices.

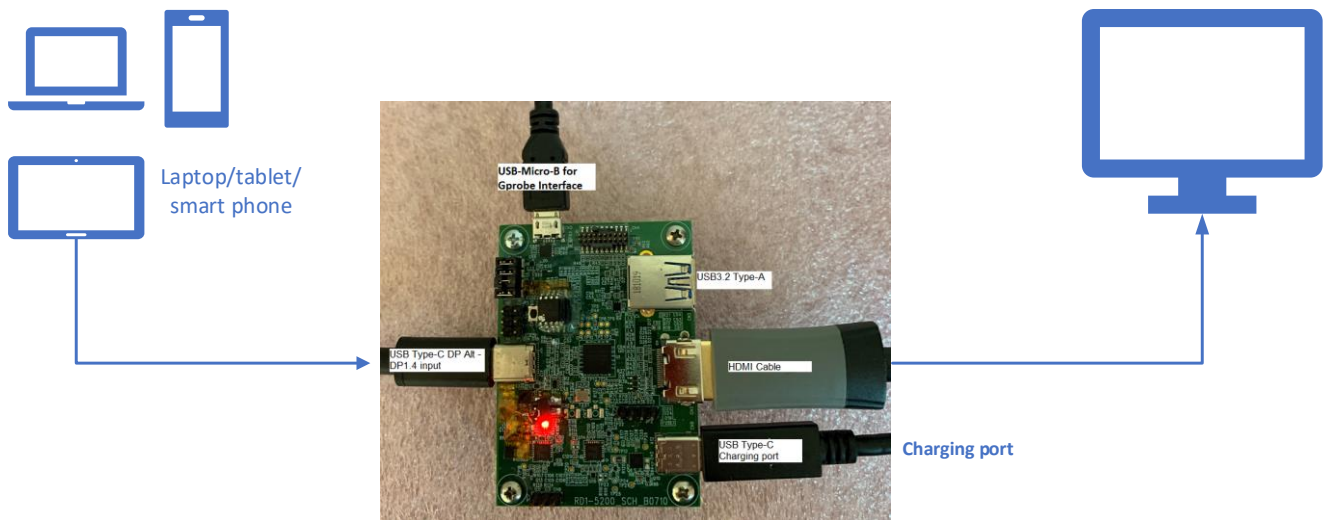


Figure 2. Connection Setup

Diagnosis

If the image does not come up, follow the steps below for diagnosis.

Note: The diagnosis requires the Kinetics' GProbe software³.

- 1) Install the GProbe diagnostic tool on a computer and set the baud rate to 115,200.
- 2) Connect a micro-USB cable to the CN5 connector as shown in figure2-3 (the board has a USB-UART for Gprobe Interface)
- 3) Install the necessary driver FTDI drivers (USB to UART) and connect to the computer with the Gprobe software
- 4) Hit the Reset button on the board. You will see the firmware version and date of firmware in the GProbe window. This indicates the DP receiver IC is functional. If the message does not appear, contact Kinetic for further assistance.

³. Contact Kinetic Marketing for the GProbe software



Connector Layout

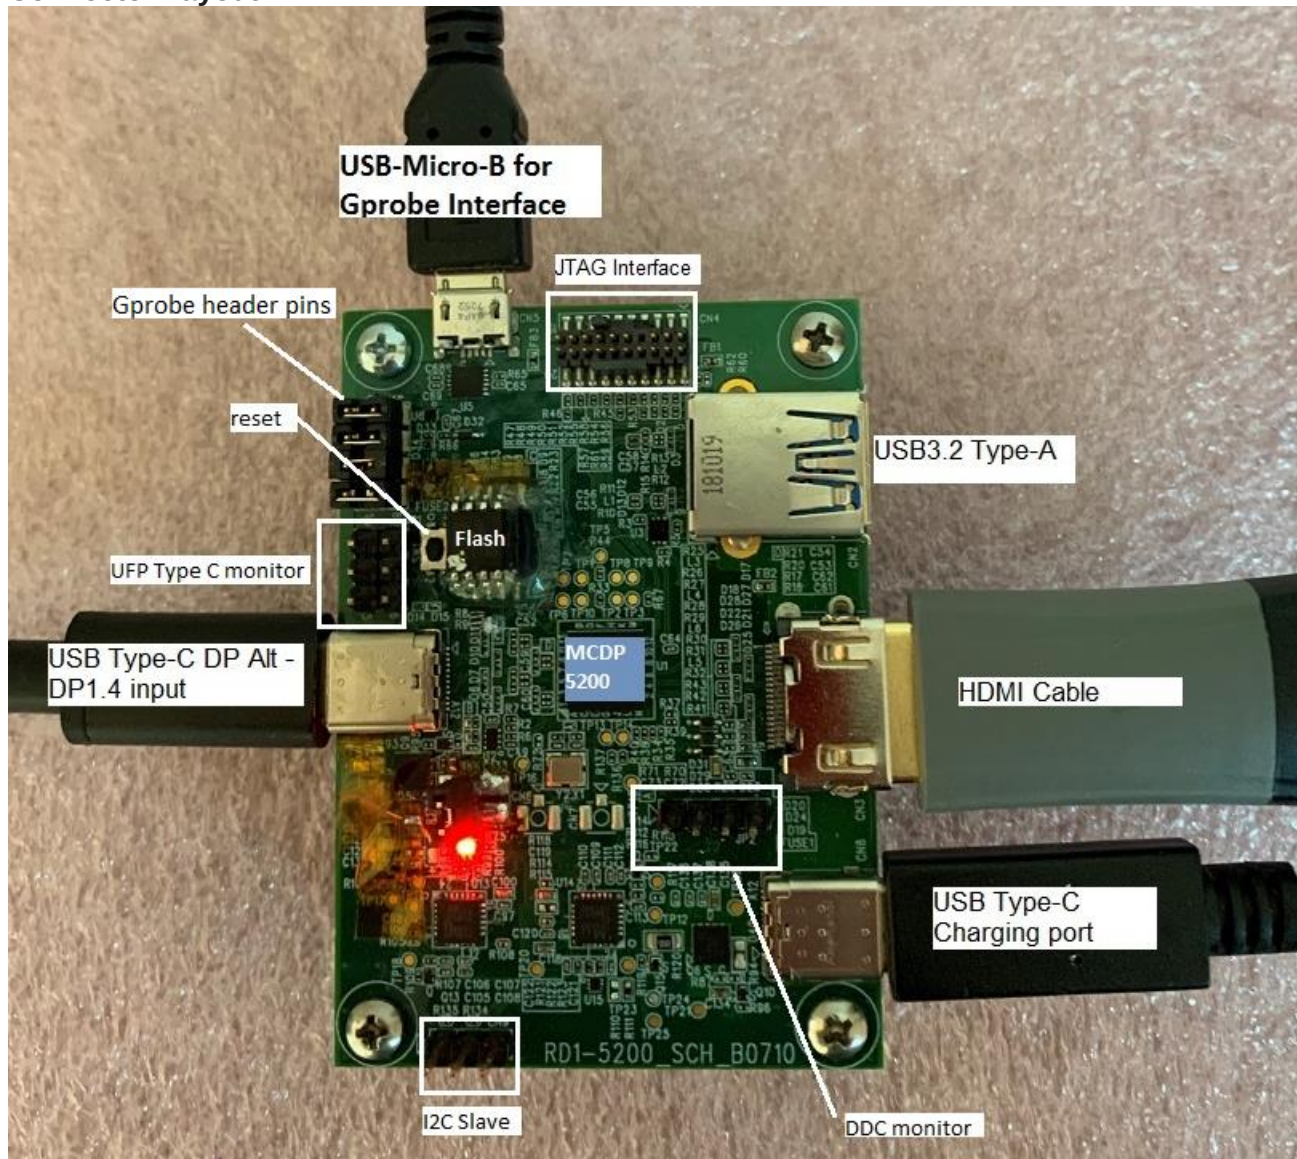


Figure 3. Connector Layout

MFP Pin Assignment



Mustang - pin definitions for board design -					RD1 (TC to HDMI/USB-A + Charge) 2019/4/25					
Original List #	Function Sort List #	GPIO Pin#	MUSTANG B0	MUSTANG B0		Primary Function (Default Function)	Secondary Function	Internal PD/PU change for primary	DIR change for primary	Description
			Mustang Ballout V07.xls Internal Name	Mustang Ballout V07.xls External Name						
92	2 H1		GPIO1_I2C_SCL	I2C_SCL_GPIO1	DIGITAL 3.3V / 5V TOLLERANT OPEN-DRAIN I/O	MCDP9000-UFP_SCL (PU to 3.3V(A0)&1.8V(B0))		PU	OUT	MCDP9000 VDDIO=3.3V(A0), 3.3V(B0)
80	3 G2		GPIO2_HPD_OUT	UFP_HPD_OUT	DIGITAL 1.8V I/O	SBU Isolation Switch	-			
79	4 G1		GPIO3_PCONF0	I2CM_SDA_PCONF0	DIGITAL 3.3V / 5V TOLLERANT OPEN-DRAIN I/O	MCDP9000-UFP.Alert#				MCDP9000 VDDIO=3.3V(A0), 1.8V(B0)
66	5 F1		GPIO4_PCONF1	I2CM_SCL_PCONF1	DIGITAL 3.3V / 5V TOLLERANT OPEN-DRAIN I/O	MCDP9000-CHG.Alert# (Level-shifter, 3.3(A0)&1.8(B0)) and used for PU bias of I2C				MCDP9000 VDDIO=3.3V(A0), 1.8V(B0)
53	6 E1		GPIO5_PPOL	ALERTN_PPOL	DIGITAL 3.3V / 5V TOLLERANT OPEN-DRAIN I/O	MCDP9000-UFP.Enable			OUT (LOW guaranteed pin)	Wake enabled, & I2C Master Pup bias. MCDP9000 VDDIO=3.3V(A0), 3.3V(B0)
76	7 F11		GPIO6_SIO0	DBG0_GPIO6	DIGITAL 1.8V I/O	JTAG_SWCLK_TCK				
91	8 G13		GPIO7_SIO1	DBG1_GPIO7	DIGITAL 1.8V I/O	JTAG_SWDIO_TMS				
78	9 F13		GPIO8_URX	URX_GPIO8	DIGITAL 1.8V I/O	UART.RX	JTAG.TDI			
77	10 F12		GPIO9_UTX	UTX_GPIO9	DIGITAL 1.8V I/O	BS5: UART.TX	JTAG.SWO_TDO			
119	11 K2		GPIO10_DFP_CEC	CEC_GPIO10	DIGITAL 3.3V / 5V TOLLERANT OPEN-DRAIN I/O	HDMITX.CEC (27K PU)	-			
90	12 G12		DFP_CONFIG1	DFP_CONFIG1	DIGITAL 3.3V / 5V TOLLERANT OPEN-DRAIN I/O	CONFIG1 (PU for HDMI)				
104	13 H13		GPIO12	GPIO12	DIGITAL 1.8V I/O	DFP_TA_VBUS SWITCH			OUT	Enable when retimer is ready.
103	14 H12		GPIO13	GPIO13	DIGITAL 1.8V I/O					
117	15 J13		GPIO14	GPIO14	DIGITAL 1.8V I/O	MCDP9000-CHG.SDA (PU to 3.3V(A0)&1.8V(B0))		DISABLE		MCDP9000 VDDIO=3.3V(A0), 1.8V(B0)
116	16 J12		GPIO15	GPIO15	DIGITAL 1.8V I/O	MCDP9000-CHG_SCL (PU to 3.3V(A0)&1.8V(B0))	JTAG.TRCLK	DISABLE		MCDP9000 VDDIO=3.3V(A0), 1.8V(B0)
130	17 K13		GPIO16	GPIO16	DIGITAL 1.8V I/O	BS6: JTAG.TRD0	JTAG.TRD0			
129	18 K12		GPIO17	GPIO17	DIGITAL 1.8V I/O		JTAG.TRD1			
143	19 L13		GPIO18	GPIO18	DIGITAL 1.8V I/O	BS8: JTAG.TRD2	JTAG.TRD2			
142	20 L12		GPIO19	GPIO19	DIGITAL 1.8V I/O	MCDP9000-CHG.Enable	JTAG.TRD3		OUT	MCDP9000 VDDIO=3.3V(A0), 1.8V(B0)
26	21 B13		SPI_HOLD_SIO3	SPI_HOLD	DIGITAL 1.8V I/O	SPI_HOLD				
64	22 E12		SPI_WPN_SIO2	SPI_WPN	DIGITAL 1.8V I/O	SPI_WPN				
51	23 D12		SPI_MISO_SIO1	SPI_DI	DIGITAL 1.8V I/O	SPI_DI				
52	24 D13		SPI_MOSI_SIO0	SPI_DO	DIGITAL 1.8V I/O	BS4: SPI_DO				
38	25 C12		SPI_CSN	SPI_CSN	DIGITAL 1.8V I/O	SPI_CSN				
39	26 C13		SPI_CLK	SPI_CLK	DIGITAL 1.8V I/O	BS2: SPI_CLK				
105	27 J1		DFP_DDC_SDA	DFP_DDC_SDA	DIGITAL 3.3V / 5V TOLLERANT OPEN-DRAIN I/O	HDMITX.DDC_SDA				
118	28 K1		DFP_DDC_SCL	DFP_DDC_SCL	DIGITAL 3.3V / 5V TOLLERANT OPEN-DRAIN I/O	HDMITX.DDC_SCL				
120	29 K3		DFP_HPD_IN	DFP_HPD_IN	DIGITAL 3.3V / 5V TOLLERANT OPEN-DRAIN I/O	HDMITX.DETECT (47K PD)				
89	30 G11		TEST	TEST	DIGITAL 1.8V I/O	GND as datasheet				

Figure 4. MFP Pin Assignment on the Board Except for High Speed Signal


Selected Pin Usage and Assignment

UFP Type-C Monitor



DEBUG

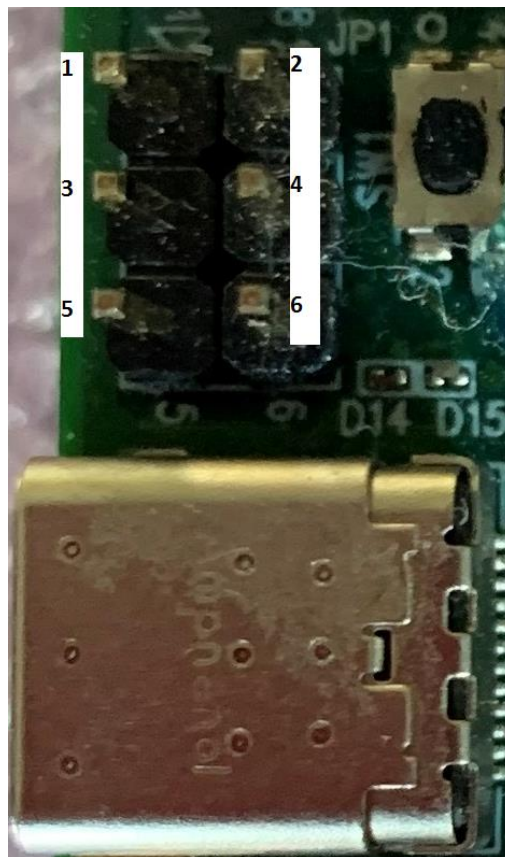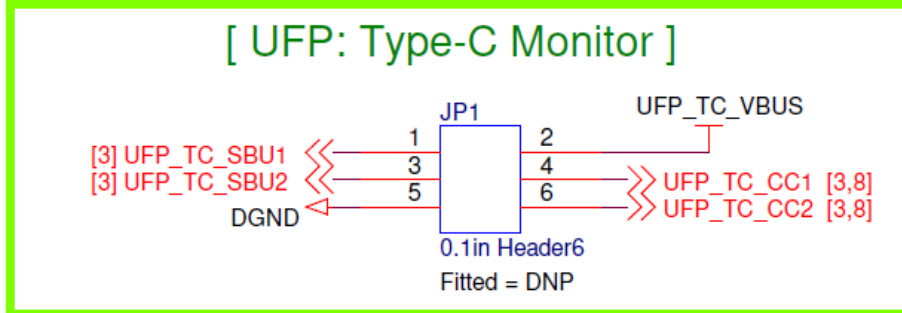


DDC Monitor for HDMI TX

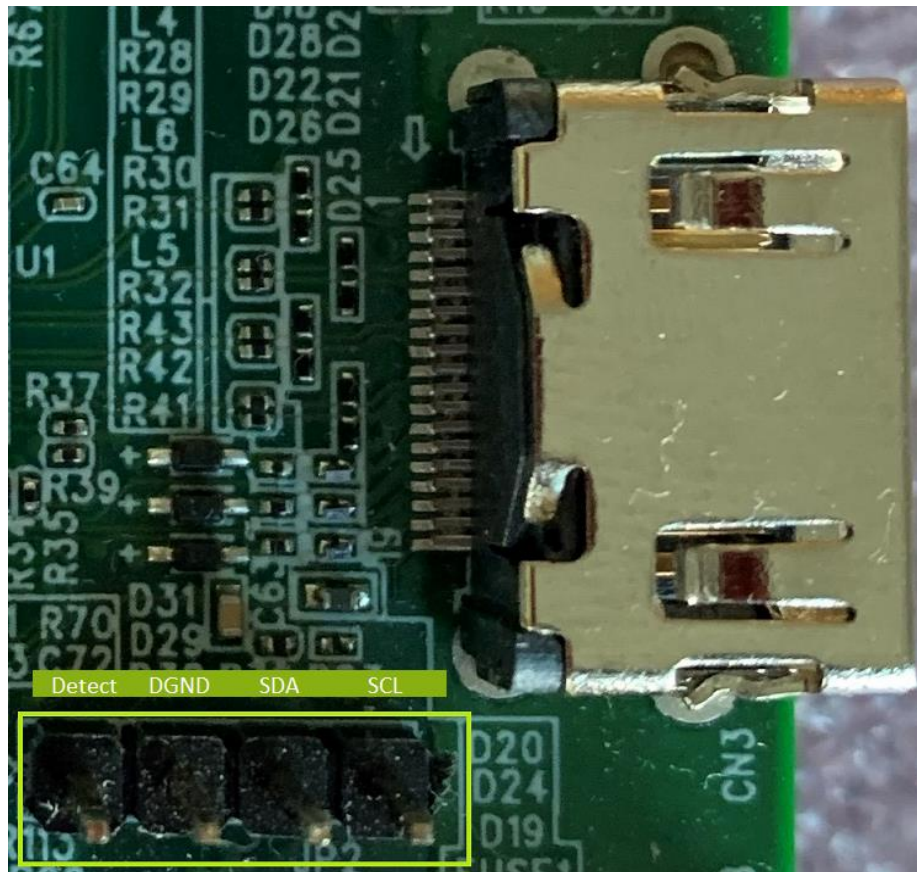


I2C Slave

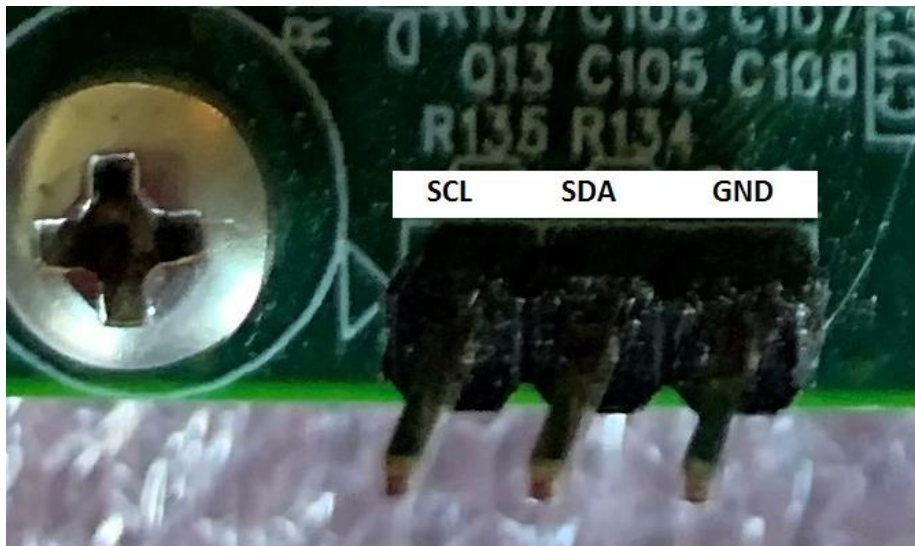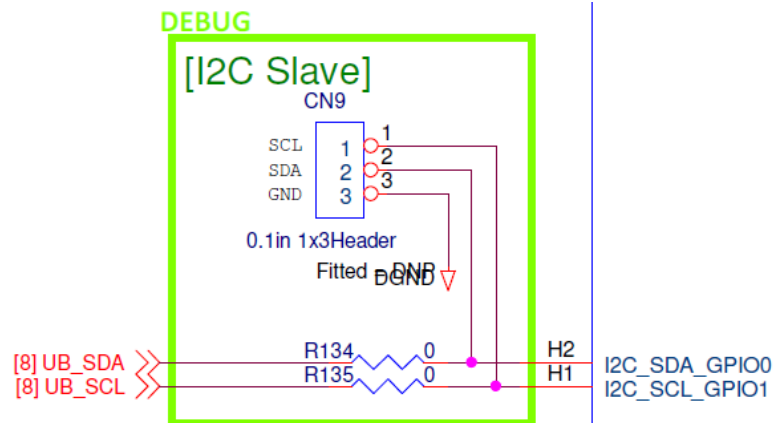

SPI Flash & Reset⁴

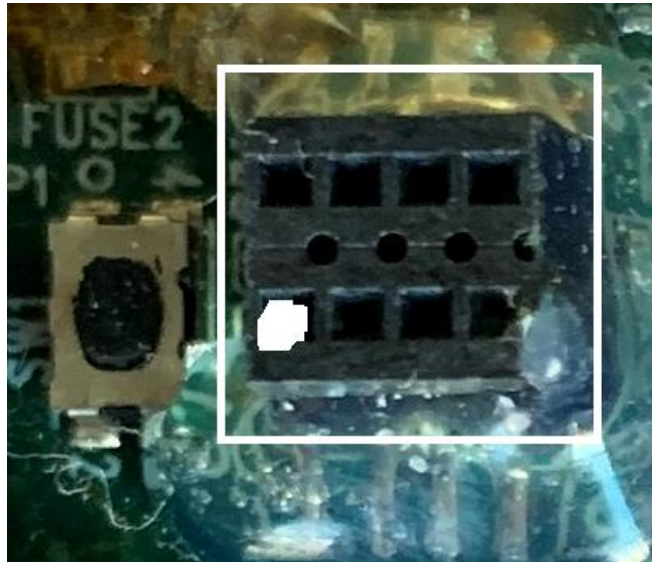

Gprobe Header Pins

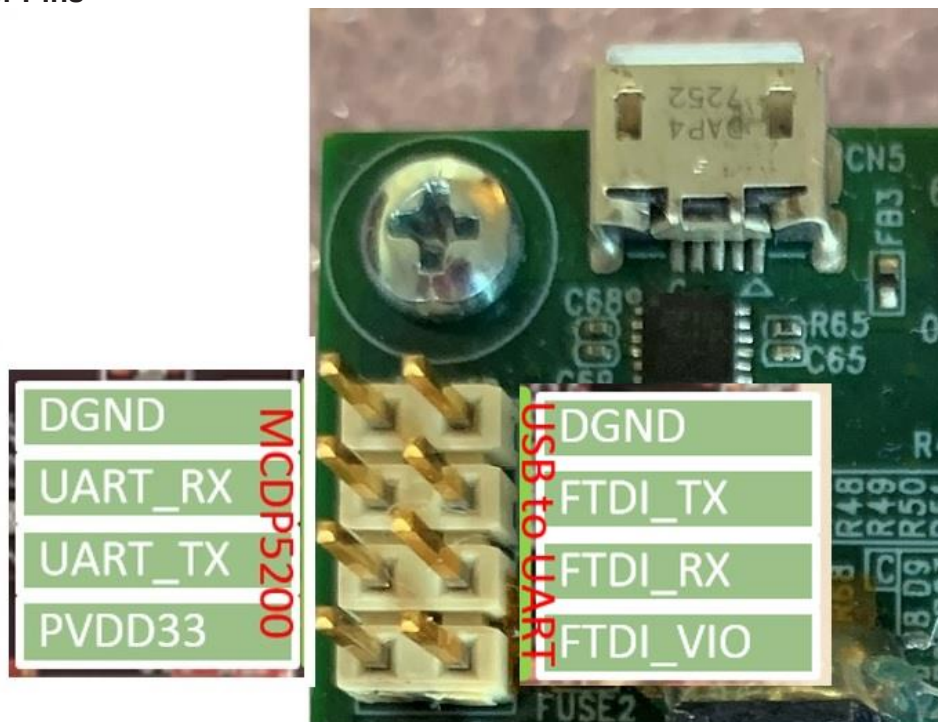

4. Flash socket might not be available as the flash will be soldered directly on the board.



Recommended Accessories

AC Adapters

This list is a list for your convenience.

Table 1. Recommended AC Adapter List

Application	Manufacturer	Model	Description	Where to Buy
DC5V Input Barrel Plug	CUI Inc	SMI36-5-V-P5	 5V/5A 25W AC/DC External Wall Mount Adapter Multi-Blade (Included) Input	https://goo.gl/2VEPF1
USB Type-C Power Adapter	Qualtek	QFWC-60-20-USCR	 5V, 9V, 12V, 15V, 20V 60W AC/DC External Wall Mount (Class II) Adapter Fixed Blade Input	https://www.digikey.com/short/z4jndz

Cables

This is a list for your convenience.

As of 2018/9/24, we have confirmed highest data rate with these cables.

Table 2. Recommended Cable List

Application	Manufacturer	Model	Description	Where to Buy
DP Alt mode	StarTech.com	CDP2DPMM1MB	 USB-C to DisplayPort 4K 60Hz Cable – 1m (3.3 ft.)	https://goo.gl/KqGoQZ
	Plugable	USBC-DP	 USB-C to DisplayPort Cable – 1.8m (6.0 ft.)	https://goo.gl/Vxta53
	Cable Matters	201036	 USB-C to DisplayPort 4K 60Hz Cable, 1m (3.3 ft.)	https://goo.gl/mK9bwi

Application	Manufacturer	Model	Description	Where to Buy
USB3.1Gen2	StarTech.com	USB31AC1M	 USB-A to USB-C Cable - USB-IF Certified USB 3.1 (10Gbps) 1m (3ft)	https://goo.gl/2nXNgG
		USB31C5C1M	 USB-C Cable with Power Delivery (5A) - M/M - USB-IF Certified USB 3.1 (10Gbps) 1m (3ft)	https://goo.gl/2nXNgG
		USB31CC1M	 USB-C Cable - M/M - USB 3.1 (10Gbps) - USB-IF Certified 1m (3ft)	https://goo.gl/2nXNgG
		USB31CUB50CM	 USB-C to Micro-B Cable - M/M - USB 3.1 (10Gbps) 0.5m (1.6ft)	https://goo.gl/2nXNgG



Important Notices

Legal Notice

Copyright © Kinetic Technologies. Other names, brands and trademarks are the property of others.

Kinetic Technologies assumes no responsibility or liability for information contained in this document. Kinetic Technologies reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or services without notice. The information contained herein is believed to be accurate and reliable at the time of printing.

Reference Design Policy

This document is provided as a design reference and Kinetic Technologies assumes no responsibility or liability for the information contained in this document. Kinetic Technologies reserves the right to make corrections, modifications, enhancements, improvements and other changes to this reference design documentation without notice.

Reference designs are created using Kinetic Technologies' published specifications as well as the published specifications of other device manufacturers. This information may not be current at the time the reference design is built. Kinetic Technologies and/or its licensors do not warrant the accuracy or completeness of the specifications or any information contained therein.

Kinetic Technologies does not warrant that the designs are production worthy. Customer should completely validate and test the design implementation to confirm the system functionality for the end use application.

Kinetic Technologies provides its customers with limited product warranties, according to the standard Kinetic Technologies terms and conditions.

For the most current product information visit us at www.kinet-ic.com

Life Support Policy

LIFE SUPPORT: KINETIC TECHNOLOGIES' PRODUCTS ARE NOT DESIGNED, INTENDED, OR AUTHORIZED FOR USE AS COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS. NO WARRANTY, EXPRESS OR IMPLIED, IS MADE FOR THIS USE. AUTHORIZATION FOR SUCH USE SHALL NOT BE GIVEN BY KINETIC TECHNOLOGIES, AND THE PRODUCTS SHALL NOT BE USED IN SUCH DEVICES OR SYSTEMS, EXCEPT UPON THE WRITTEN APPROVAL OF THE PRESIDENT OF KINETIC TECHNOLOGIES FOLLOWING A DETERMINATION BY KINETIC TECHNOLOGIES THAT SUCH USE IS FEASIBLE. SUCH APPROVAL MAY BE WITHHELD FOR ANY OR NO REASON.

"Life support devices or systems" are devices or systems which (1) are intended for surgical implant into the human body, (2) support or sustain human life, or (3) monitor critical bodily functions including, but not limited to, cardiac, respirator, and neurological functions, and whose failure to perform can be reasonably expected to result in a significant bodily injury to the user. A "critical component" is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

SUBSTANCE COMPLIANCE

Kinetic Technologies IC products are compliant with RoHS, formally known as Directive 2002/95/EC of the European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. However, this evaluation kit does not fall within the scope of the EU directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the requirements of these or related directives. To the best of our knowledge the information is true and correct as of the date of the original publication of the information. Kinetic Technologies bears no responsibility to update such statement.

