

Gas Range, 48", 8 Burners, LPG

Series 7 | Professional
Stainless Steel | LPG




A striking addition to your kitchen, with eight powerful gas burners and two gas ovens giving you a combined capacity of 7.7 cu ft.

- Top burner heat of 19,000 BTU, for seriously fast boiling
- Expansive 7.7 cu ft total oven capacity across two oven cavities
- Non-tip full-extension shelves in main cavity for safe removal of hot dishes

DIMENSIONS

Height	35 3/4 - 36 3/4"
Width	47 7/8"
Depth	29 1/8"

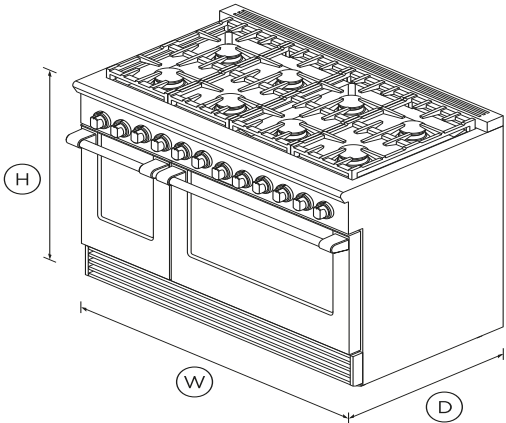

FEATURES & BENEFITS

Cooktop power
Sealed Dual Flow Burners™ deliver cooktop power up to 23,500 BTU (NG models) for seriously fast boiling right down to a precise 140°F full surface simmer with the gentlest of flames.

Total control
Precise control across high and low settings is delivered through the halo-illuminated cooktop dials. The ovens have true convection and electronic oven control for precise and consistent temperatures.

Easy to clean
A sealed cooktop surface coupled with a commercial-style stainless steel finish means your cooktop simply needs a quick wipe to keep it looking good as new.

Instant visibility
Control dials have halo-illumination glowing white – heating up; orange – temperature reached; red – self-cleaning mode. The oven is illuminated by two powerful incandescent lights.

Cooking flexibility
The cooktop is designed for easy access to any burner with grates you can smoothly slide pots across. The oven is large enough to hold full size baking sheets.

Consistent broiling
The Gas Range broiler provides an even heat that covers a very large surface area — perfect for browning a fully loaded oven tray.

SPECIFICATIONS

Accessories	
Square handle option	AH-R48
Burner ratings	
Maximum burner power	19000 BTU
Power back centre	13000BTU
Power back centre (2)	13000BTU
Power back left	13000BTU
Power back right	13000BTU
Power front centre	15000BTU
Power front centre (2)	15000BTU
Power front left	19000BTU
Power front right	19000BTU



Total cooktop power120000 BTU

Capacity

Shelf positions5
Shelf positions5

Controls

Electric circuit3 wire
Metal illuminated dials•

Gas Requirements

Fitting and pipe½ NPT, min. ⅝" flex line
Supply Pressure (LPG)11" to 14" W.C

Oven features

Full extension telescopic•

Oven performance

Main oven - Bake power22,000 BTU
Secondary oven - Bake power18,500 BTU

Power requirements

Amperage15A
Rated current15A
Supply frequency60Hz

Product dimensions

Depth29 1/8"
Height35 3/4 - 36 3/4"

Width47 7/8"

Rangetop features

Sealed Dual Flow Burners™8
Sealed range top•
Vent trim included•

Recommended Back Guards Ventilation

Combustible situationBGRV2-3048H
Minimum CFM1200
Non combustible situationBGRV2-3048 / BGRV2-1248
Recommended hoodHCB48-12_N (48"

Safety

ADA compliant•
Full extension telescopic•

Secondary oven features

3/4 Extension racks2
Electronic oven control•
Internal light•

Secondary oven functions

Bake•
Number of secondary oven2
Proof•

SKU71351

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. ? Fisher & Paykel Appliances Ltd 2020



Other product downloads available at fisherpaykel.com



User Guide



Guide D'Utilisation



Service & Warranty



Installation Guide



Guide D'Installation



Data Sheet Gas Range



Planning Guide Gas Range



A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 W www.fisherpaykel.com

