



Simply Vento V 2.1 S Vento Compact V 2.1 FE INSTALL

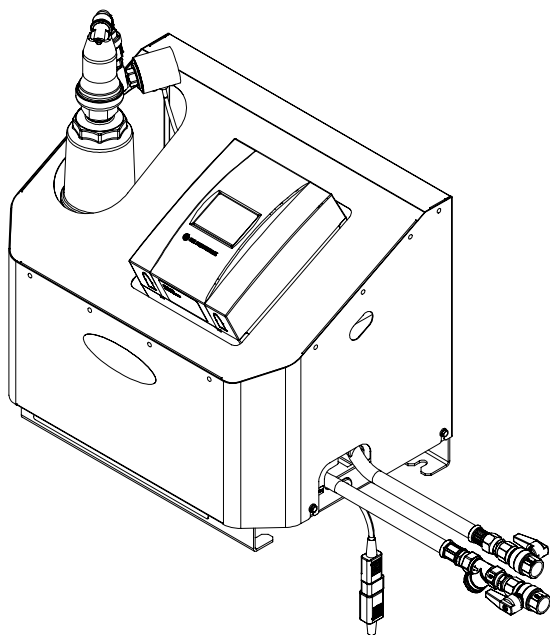


IMI PNEUMATEX®	
Simply Vento	
Technical data for Simply Vento V 2.1 S and Vento Compact V 2.1 FE Model: V 2.1 S / V 2.1 FE Pressure: 0.5 - 1.0 MPa Flow rate: 100 - 200 l/min Power: 1.5 - 2.0 kW Weight: 10 - 15 kg Dimensions: 100 x 100 x 100 mm Material: Stainless steel Accessories: Hose, connectors, mounting bracket	

IMI PNEUMATEX	
SAFETY - INSPECTION - DISASSEMBLING - DISPOSAL prescriptions	
1. SAFETY 2. INSPECTION 3. DISASSEMBLING 4. DISPOSAL	


1

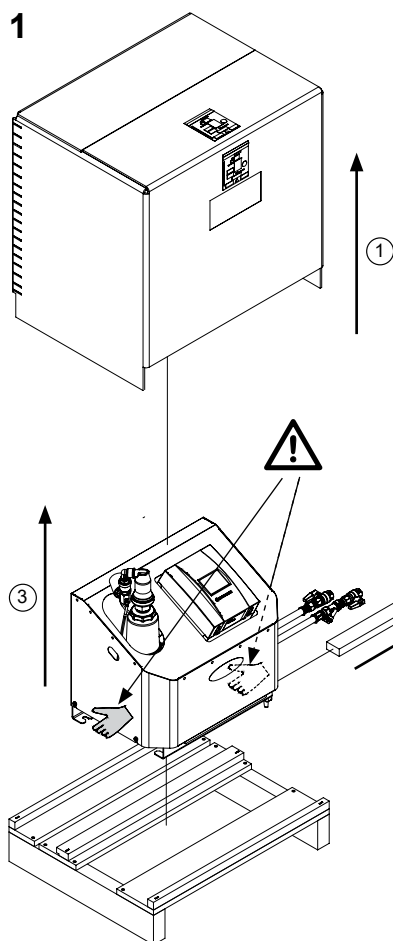






2

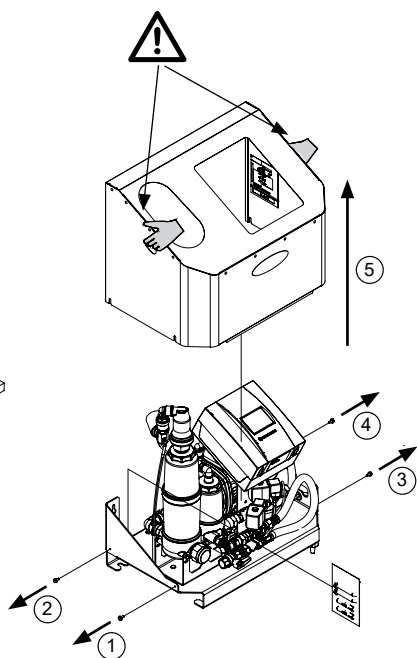




3

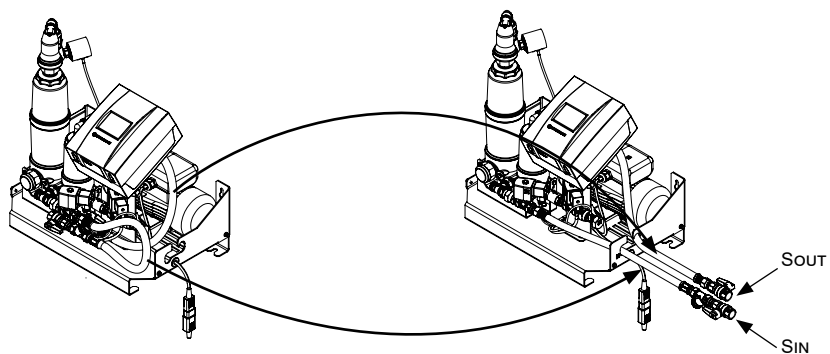


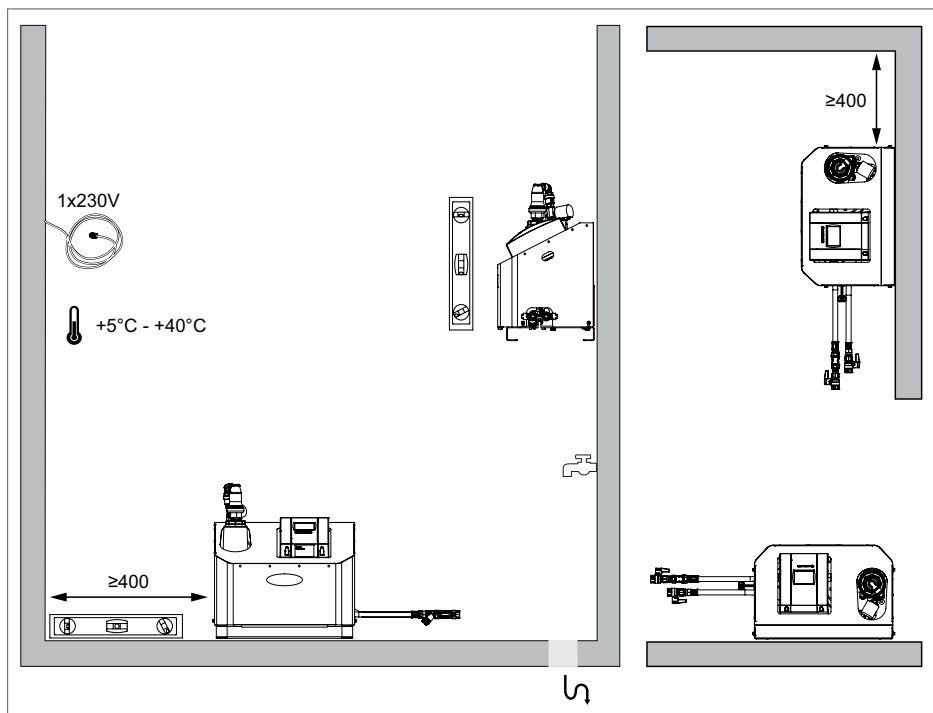



Accessory kit

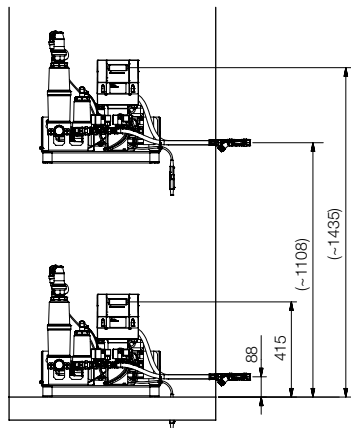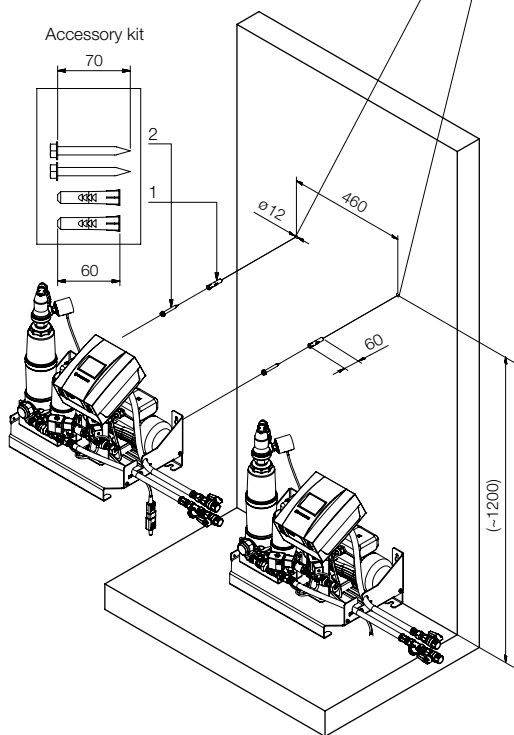






Option 30103230021




+




1

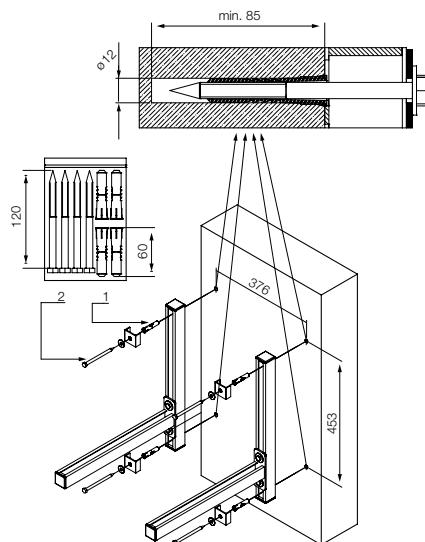


3




4

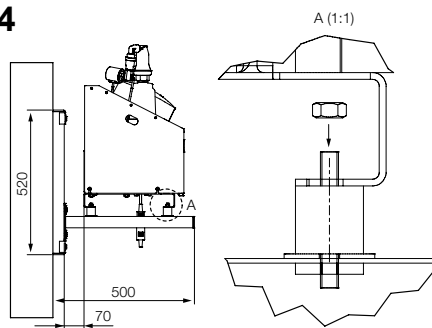


2

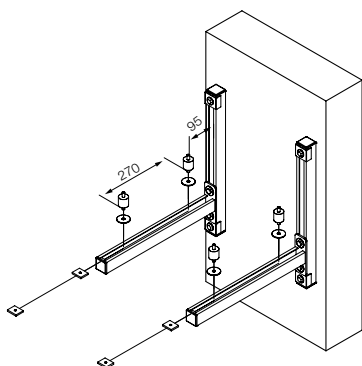


5

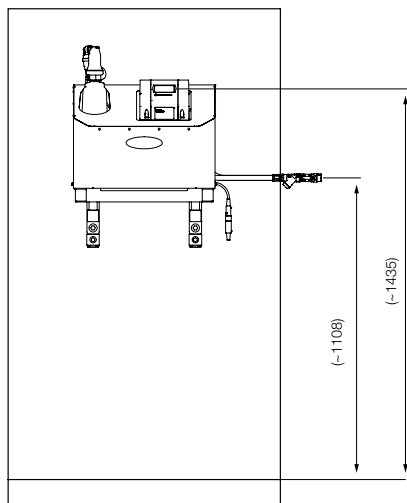


1

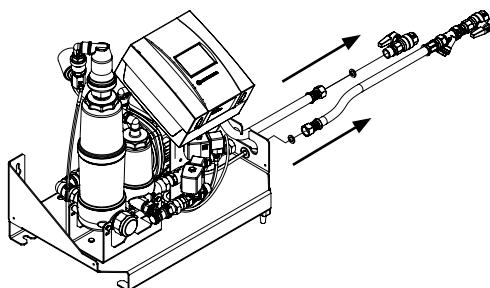


2

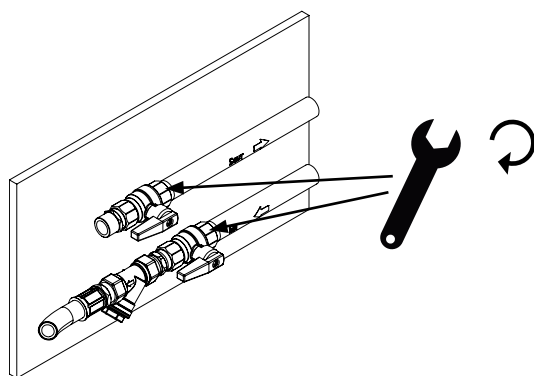


3

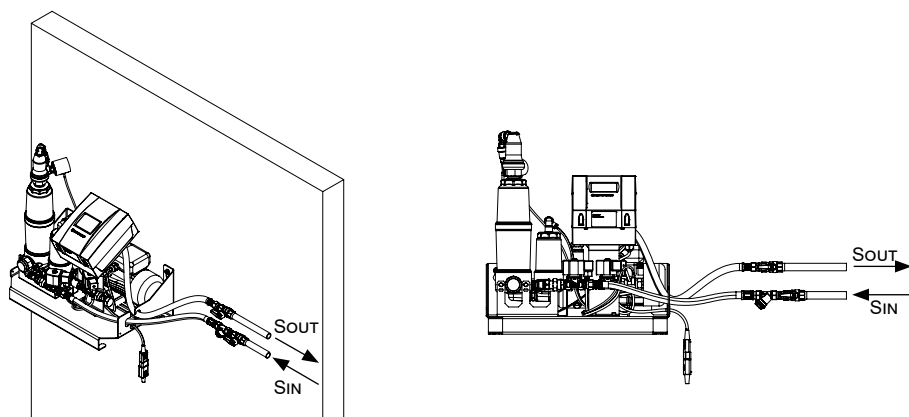

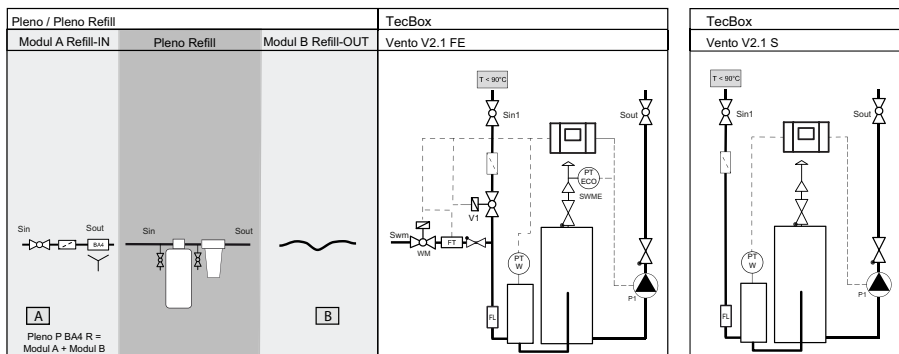


 Optional

Vento V2.1 S

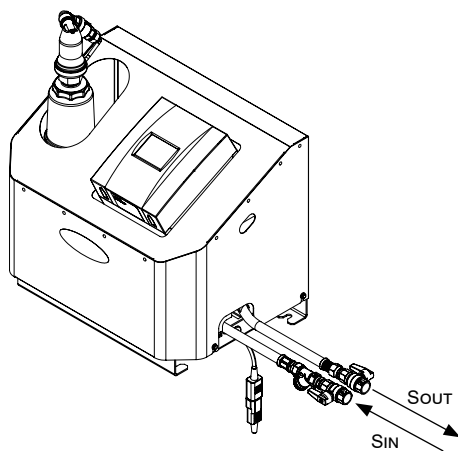

Vento V2.1 FE

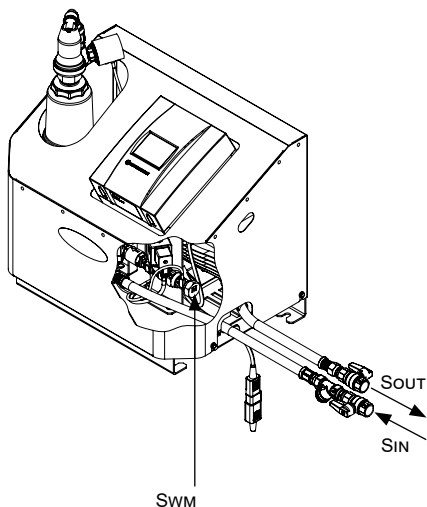

		V2.1 S	V2.1 FE
dpu min	bar	0,5	0,5
dpu max	bar	2,5	2,5


		Sin	Sout	Swm
Ts min	°C	0	0	0
Ts max	°C	90	90	65



$tr \leq 90^{\circ}\text{C}$


Vento V2.1 FE

**+
Pleno P BA4R**

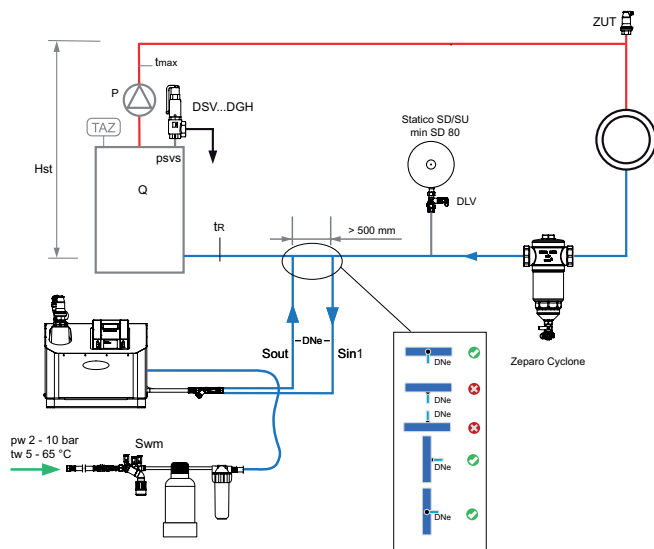

$tr \leq 90^{\circ}\text{C}$

Vento V2.1 S

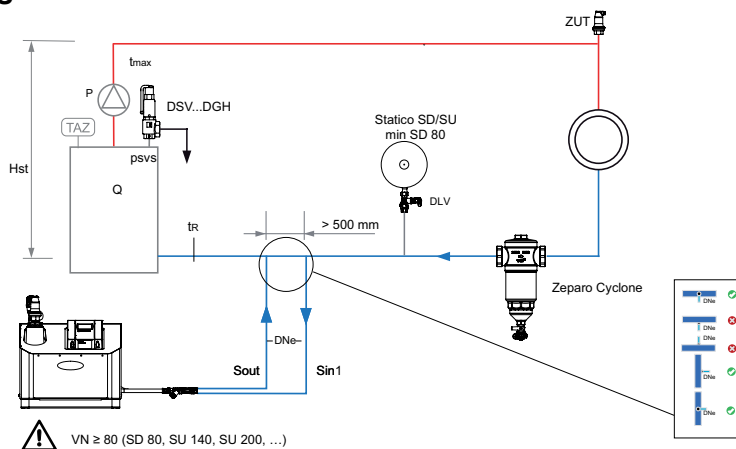






DNe

		V2.1 S	V2.1 FE
L max 10 m	DNe	25	25
L max 20 m	DNe	25	25
L max 30 m	DNe	32	32


230V/50 Hz
10A / 3 x 1,0 mm²



#1-5

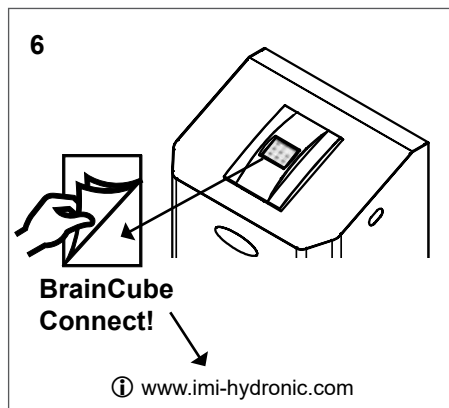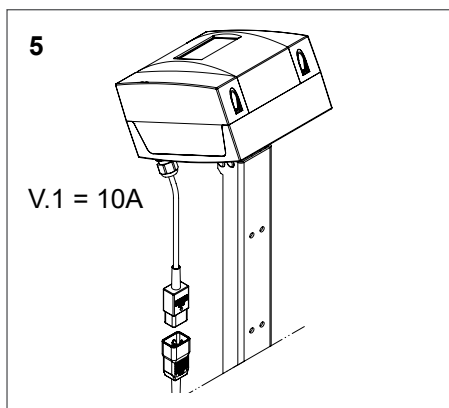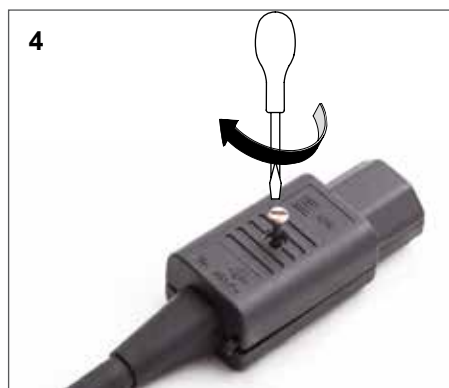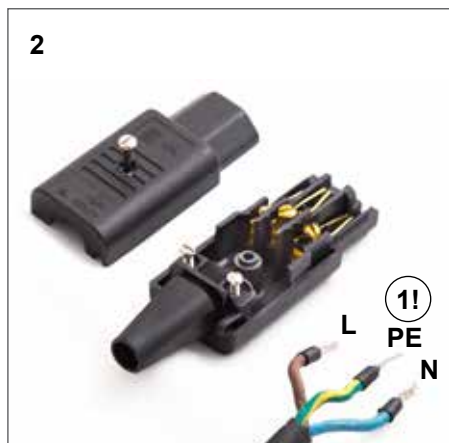
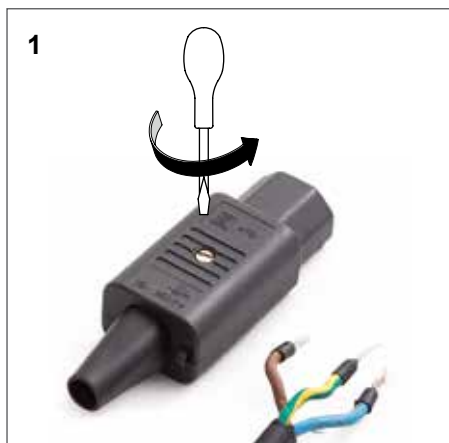


230V/50 Hz

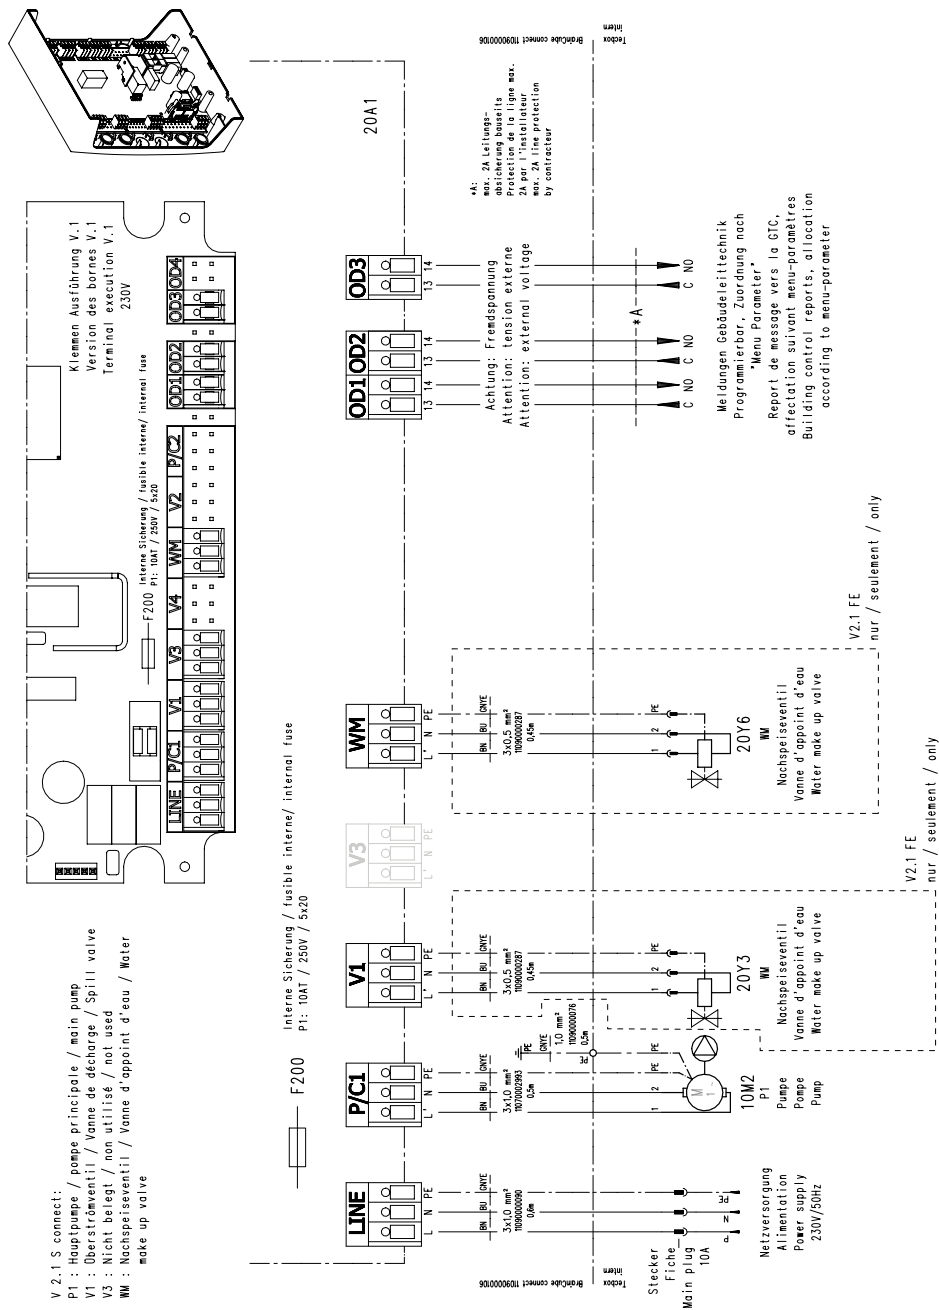

Vento V2.1 S / V2.1 FE

24V

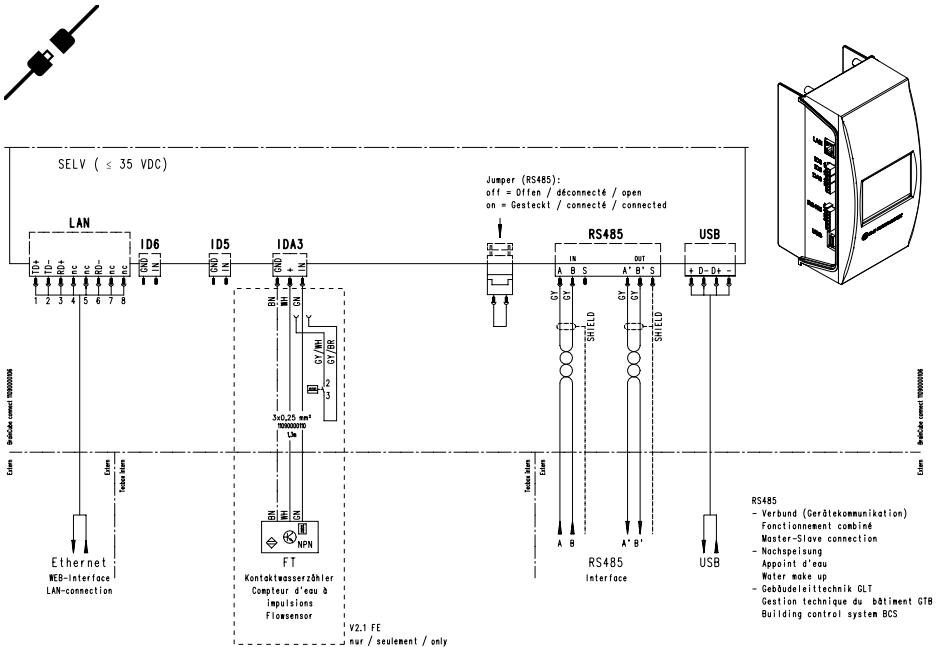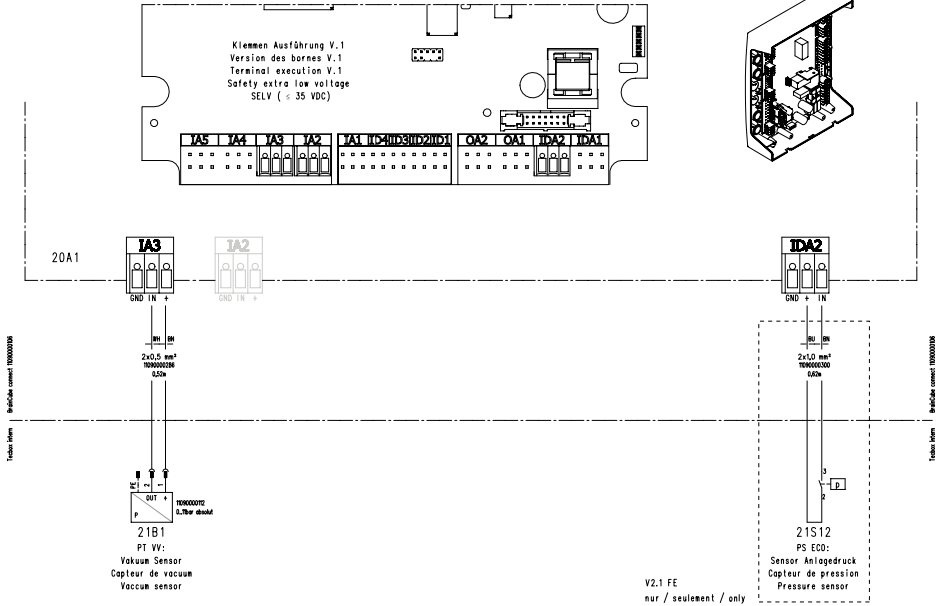

Vento

Compresso

