


1.Introduction

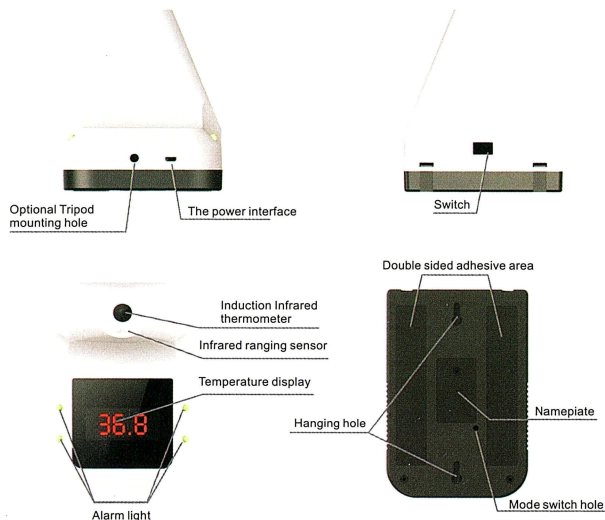

2.Specification

1. Accuracy: ± 0.2 degrees (34 ~ 45℃, place it in the operating environment for 30 minutes before use)
2. Abnormal automatic alarm: flashing+"Di Di" sound
3. Automatic measurement: measuring distance 5cm ~ 10cm
4. Screen: Digital display
5. Charging method: USB charging or battery (18650 Li-ion).
6. Install method: nail hook(optional), double-sided adhesive sticking, bracket fixing(optional)
7. Environment temperature: 10℃~40℃ (Recommended 15℃~35℃)
8. Infrared measuring range: 0 ~ 50℃
9. Response time: 0.5s
10. Input: DC 5V
11. Net weight: 350g
12. Dimension: 170* 115* 140mm
13. Standby: About one week
14. Counting capacity: 999

3.Status Description

1. Standby. The red dot in the bottom of the display lights up in turn. (Fig.1)
2. Insufficient power: The horizontal bar lights up in the middle of the display. (Fig. 2)
3. Normal temperature: Flashing green lights and alarm "Di". (Fig. 3)



Fig. 1




Fig. 2



Fig. 3

4. Abnormal temperature: Flashing red lights and alarm "DiDi". (Fig 4)
5. Default (bod object mode)
 "Lo": Ultra-low temperature alarm. (Fig. 5)
 "HI": Ultra-high temperature alarm. (Fig.6)



Fig. 4



Fig. 5



Fig. 6

4.Operation Instruction

1. Temperature measurement: Front of the thermometer and approach it within 5-10 cm. (Fig 7)





Fig. 7

2. Mode switching: There is a small hole on the back of the device (Fig. 8). You can use a 3mm diameter screwdriver to insert the hole and then press the button.
 (1) Temperature unit: Press 'mode switch hole' then select "C" or "F" (Fig.9, 10) C: Celsius F: Fahrenheit



Fig. 8



Fig. 9



Fig. 10

(2) Mode: Long press mode switch hole for 3 seconds to switch the temperature measurement mode (Sur: surface mode, bod: object mode, Cou: counting mode)



Fig.11





Fig.12




Fig.13

3.install and replace battery


- (1) Remove three screws
- (2) Open the back base and install 18650 Li battery




4.install method



1.Nail hook



2.Bracket fixing



3.Double-sided adhesive sticking

Infrared Electronic Thermometer User Guide



Model: M3