

EFFYDESK

Instruction Manual

Technical Data

Segment Column	3	Input Voltage	100-240V
Maximum Load	300 lbs	Speed	35mm/s
Recommend Load	< 240 lbs	Certification	UL
Height Range	600-1250mm		

Accessory List

Ax8  M6X12	Bx4  M6X8	Cx12  M5X18 or M6X16
Dx5  Zip Tie	Ex12  Rubber Pad	Fx2  M4X12
Hx8  M8X10	Ix6  M4X10	Jx2  Hangers
Gx8  M6X16		


Tool Required


 3mm Allen Key (Included)	 4mm Allen Key (Included)
 Tape Measure	 Screwdriver

Parts List

No.	Control Box	Qty
①		1


No.	Power Cable	Qty
②		1

No.	Lifting Column	Qty
③		2


No.	Foot	Qty
④		2

No.	Extension Cord	Qty
⑤		1

No.	Side Bracket	Qty
⑥		2

No.	Keypad	Qty
⑦		1

No.	Crossbar	Qty
⑧		1

No.	Cable Tray	Qty
⑨		1

Thank you for your order!

If you have any issues with your product, please feel free to contact us via team@effydesk.ca or info@effydesk.ca We will help you resolve the issue as soon as possible.


For more information, please visit

<https://effydesk.ca/pages/how-to-assemble-your-height-adjustable-standing-desk>





STEP 1

Separate the Crossbar ⑧ and you will find the Crossbar Rail inside.

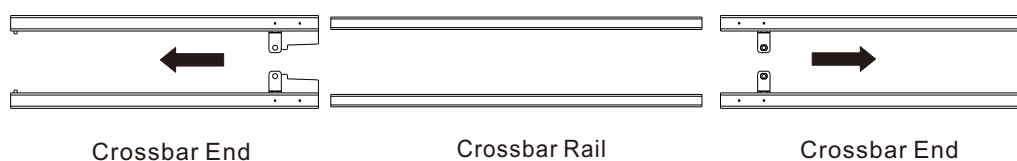



STEP 2

Insert one of the Crossbar Ends into the one of the Lifting Columns ③ and secure with screws. Repeat the same step for the other Lifting Column.

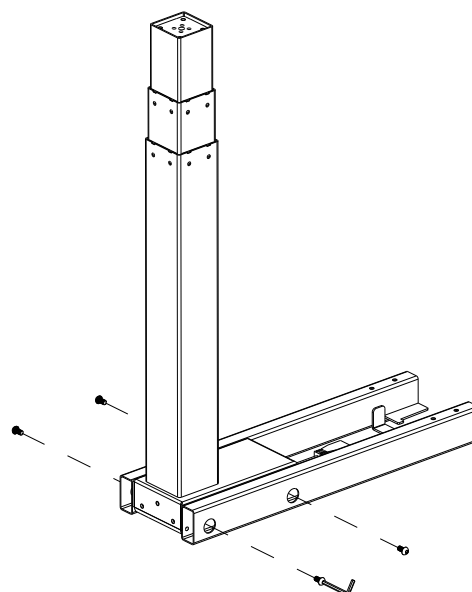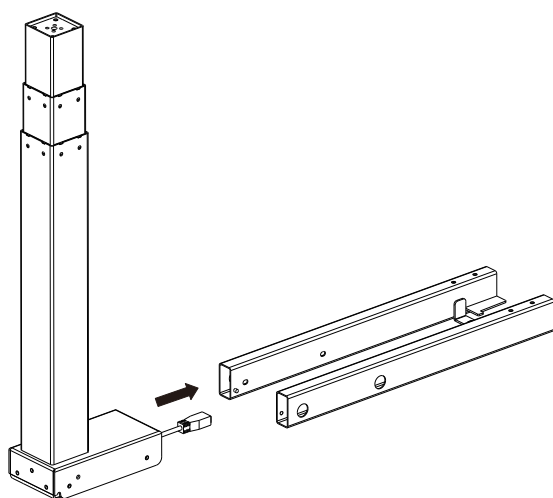

STEP 3

Attach the Side Bracket ⑥ to one of the Lifting Columns. Repeat the same step for the other Lifting Column.

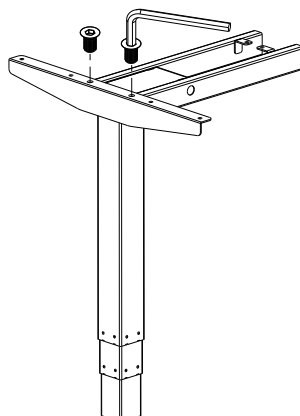


STEP 4

Slide the two Crossbar Ends back into the Crossbar Rail.
Please make sure to fit the slots as shown below.



Note: Please make sure the circular holes are facing inwards as shown below.

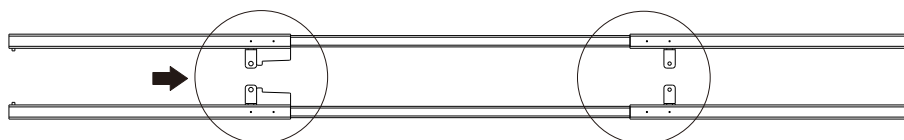


Slider for Control box

STEP 5

Attach both Feet ④ to the bottom of the Lifting Columns.

G
x8





Allen Key
4mm

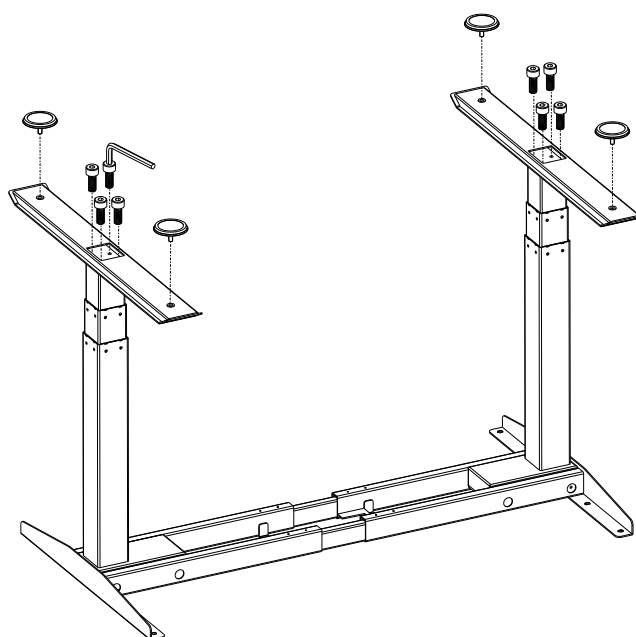

STEP 6

For small/ medium tabletops, use the screws to tighten the Hangers onto the Crossbar.




For large tabletops, use the screws to tighten the Hangers onto the Crossbar.

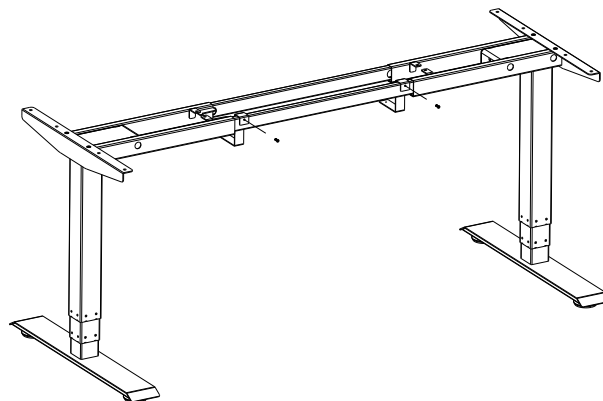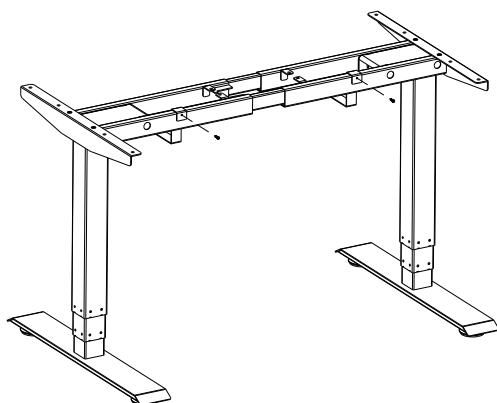

Note: The screws do not go through the Crossbar. Hangers, Allen Key and screws are found in a separate bag.





STEP 7

Install the tabletop (Predrilled / Non-predrilled).

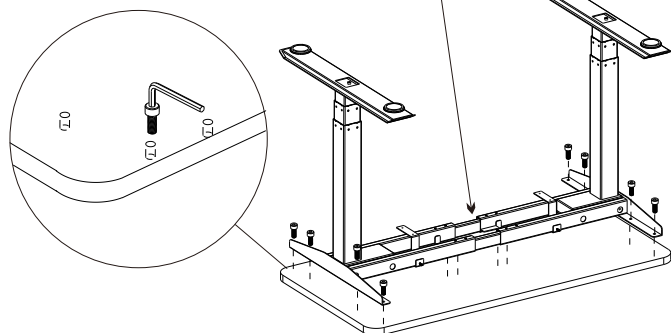

Predrilled




Note: Please do not over-tighten the screws.

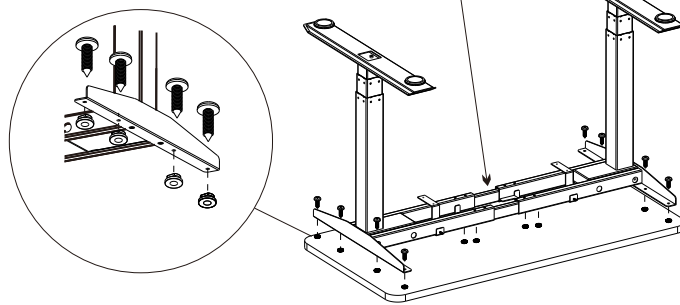

Non-predrilled

STEP 8



Firmly secure the Crossbar with Screws (H) and connect all the cables to the Control Box ①.

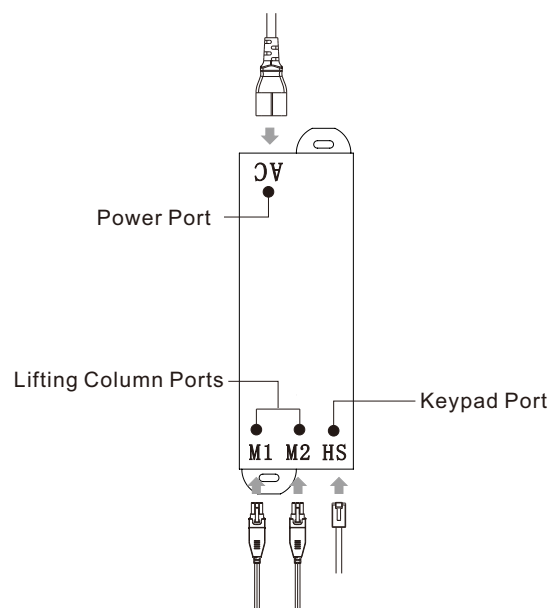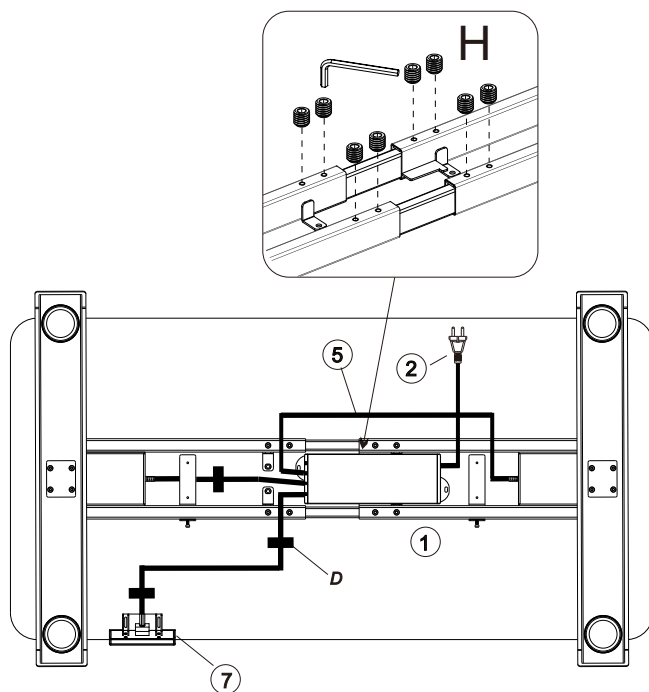

Note : Use Zip Ties (D) to secure cables under the table.

STEP 9

Attach the Cable Tray ⑨ to the Hangers with screws.

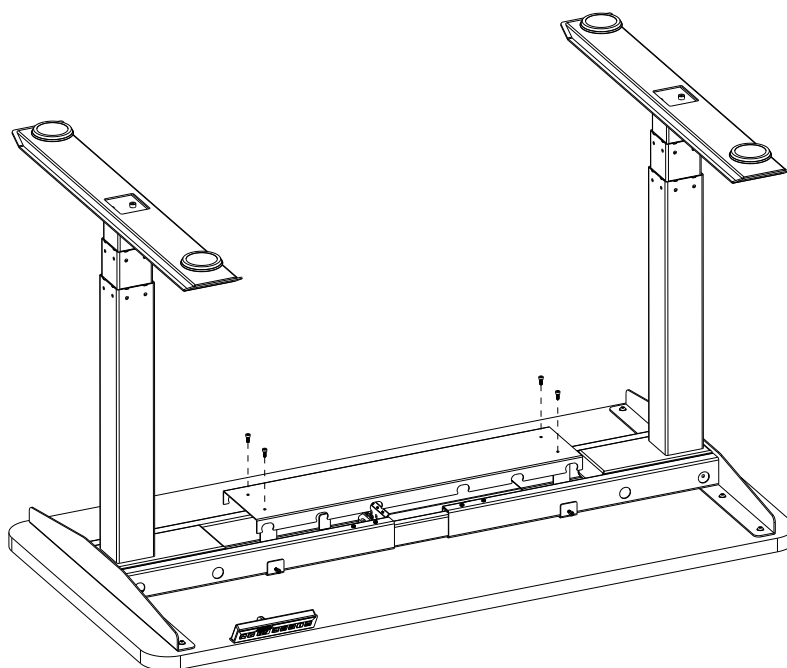

STEP 10

Attach the Keypad ⑦ with Screws (F) to the tabletop.


F



x2





Screwdriver

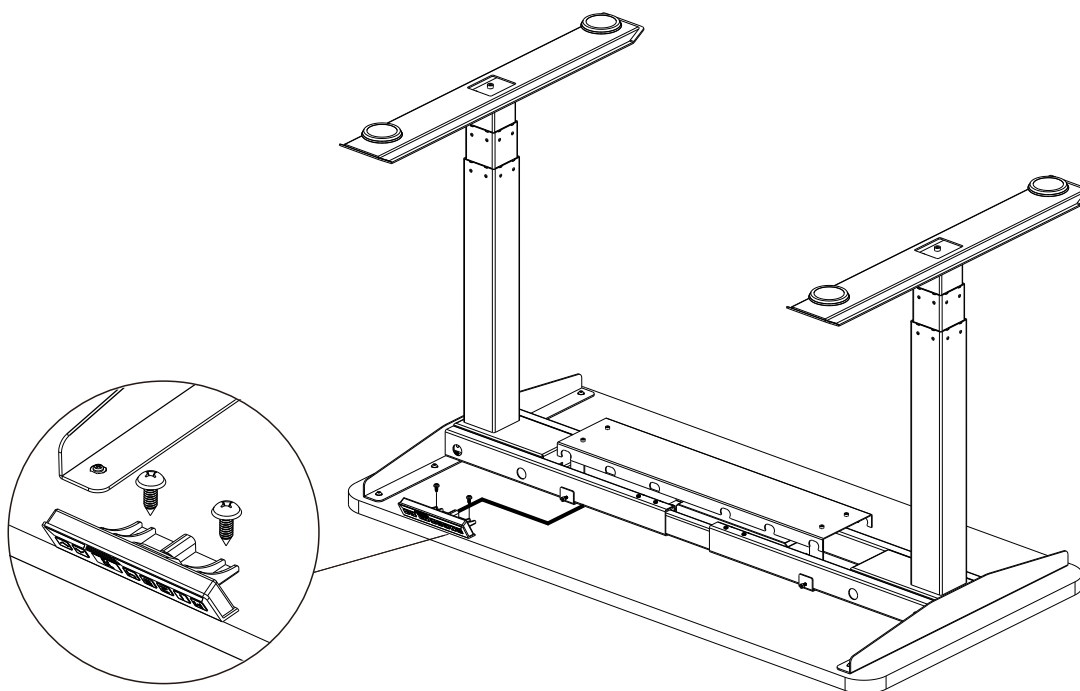

STEP 11


Plug the cable from the Keypad into the Control Box and flip the table onto its feet.

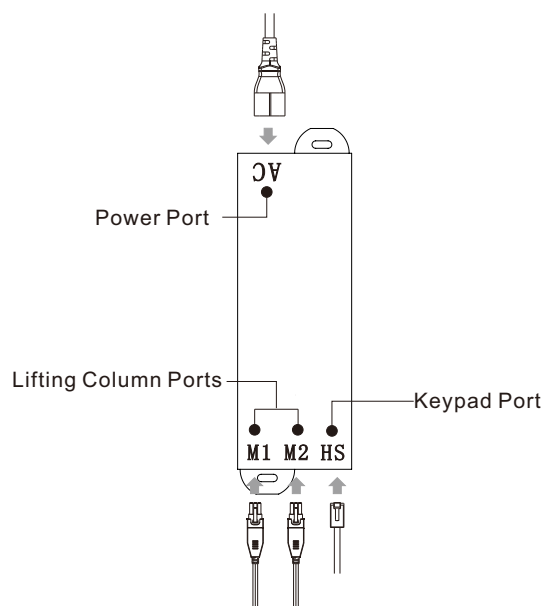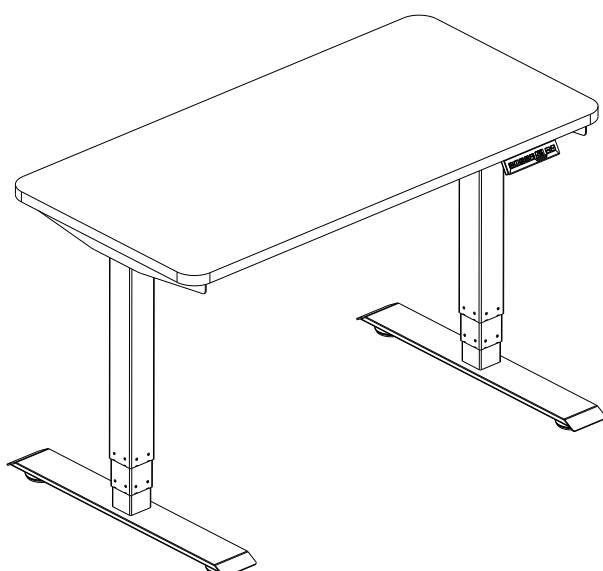

Note: The Control Box is equipped with a gyro sensor so the table and the Control Box must be level in order to work properly or else it will not move up and down.



Prepare for First-time Use

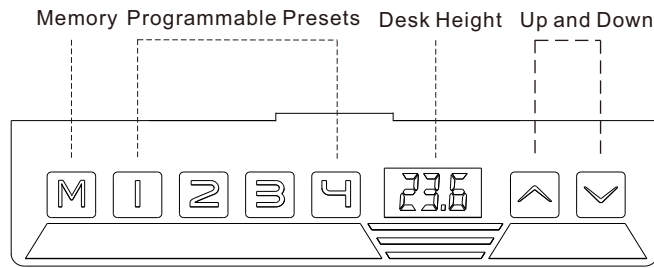

Before plugging in the table, make sure that

- The Lifting Columns are level and set at their lowest position.
- All the screws are tightened to avoid the desk becoming wobbly.
- There is no object above or beneath the desk within its range of movement as it may result in physical damage.


Calibrate the desk by following the steps below:

- Please press the Down button and hold for 10-15 seconds until the table stutters and beeps.
- Release the button. Your desk is ready to use!

Operation Guide


Program Presets

- Adjust the table to the desired height, then press M. "S-" will flash on the display.
- Press a number to set the desired height as a preset.

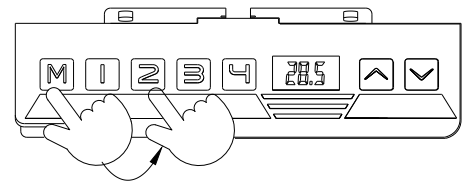

Advanced Safety Feature: Lock and unlock the table

- Press the Up and Down buttons at same time for 5 seconds, until "LOC" appears on the display.
- All buttons will be inactivated and no change can be made.
- Press the Up and Down buttons together again to unlock the Keypad and all of the table's features.

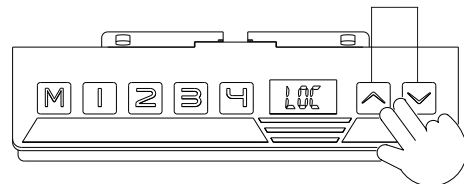

Set Maximum Height Limit

- Raise the desk to the desired maximum height.
- Press M and the Up button together for 5 seconds until you hear a beep. This sets the maximum height limit.

Set Minimum Height Limit

- Lower the desk to the desired minimum height.
- Press M and the Down button together for 5 seconds until you hear a beep. This sets the minimum height limit.

Changing from centimetres to inches


- Press M for 10 seconds, the Keypad will display "1-1".
- Press the Down button and it will change to "1-0".
- Press M for 10 seconds to lock the setting.



Reset the table

When an error code or “RST” appears on the display, please reset the table.


- Unplug the power cord from the Control Box.
- Unplug the cable that connects the Keypad to the Control Box.
- Wait 30 minutes and plug all the cables back in again.
- Press the Down button and hold for 10-15 seconds until the table stutters and beeps.

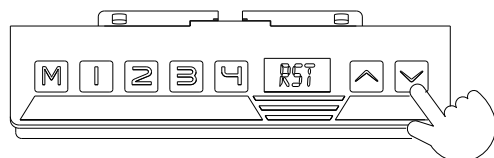

Press by holding
10-15 seconds

If “HOT” appears on the display

- Please unplug and replug and let it cool off for a couple of minutes before proceeding.



EFFYDESK

If you have any questions, please contact us at

team@effydesk.ca or info@effydesk.ca

www.effydesk.ca

