

User Manual



Prior to installation steps:

1. Unpack your new product and ensure that all the parts are contained in the packaging.
2. Keep the product in its original box until you are ready to install it.
3. The counter top must be flat.
4. Shut off the water supply if replacing a previously-installed vessel sink.
5. Observe all plumbing and building codes in your area.
6. It is recommended that installation of the product be done by a professional plumber.
7. We are not responsible for improper sink or countertop installation. We are not liable for any damages to sink or countertop or personal injury during installation.

Decide on your preference prior to installation.

Alignment of sink to cutout is critical for a superior fit and finished look. Depending on your aesthetic preference, sinks can be installed either with a 1/4" reveal, flush fit, or with a negative reveal. 1/4" reveal is recommended.

1/4" Reveal

The countertop edge sits approximately **1/4" back** from the edge of the sink and exposes the rim of the sink.




Flush Fit

The countertop meets the edge of the sink, **fitting flush** with the sink bowl.




1/4" Overhang

The countertop **extends 1/4"** over the edge of the sink on all sides.

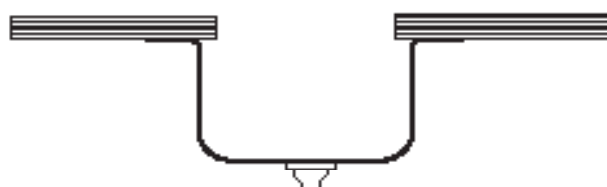

Installation



1, Nj_ac rcknj_rc ml amslrcprmn, Nmqqrgm l gr qsaf rf_r rfc qg l i ugjj f_tc nrmncp ajc_p_lac
dpm k a_g lcr,
0, Rp_ac _jg lc _pmslbrfc rcknj_rc, Bcrckg lc u f_r pctc_ju wms u_lrwmsp qg l i rm f_tc
&qcc npctgmsq n_ec' _lb _qcb ml rf_r*_bhsqr rfc jg lc _aampbg le jw, Asr_jm l e rfc jg lc,
1, Rsp l rfc amslrcprmn snqgbc bmul*_lb k_pi ctcljw+qn_acb nmqqrgm l q dmp rfc _lafmpq
dmp rfc kmslrg le ajgn, Ucpam k kclb 1 kmslrg le ajgnq dmp rfc qg l i qgbcq 0.µ _lb
jm lecp*_lb 0 kmslrg le ajgnq dmp rfc qfmp rcp qgbcq, Bpgjj fmjcq dmp rfc _lafmpq &dmjjm ugle
rfc amslrcprmn k_lsd_arspcp%q g lq rpsargm lq' _q qfmu l `cjm u, Sqc \_bpgjj `gr ugrf qrmn
`jmai rm _tmgb bpgjjgle rfpmsef rfc amslrcprmn, Qcaspc _lafmpq g lrm rfc amslrcprmn _lb
d_qrc l kmslrg le ajgnq jmmqcjw, LMRC8 Dmp ep_lgrc* k_p`jc mp qmjgb qrm lc amslrcprmnq uc
pcam k kclb sqg le jc_b _lafmpq ufgaf _pc ejscb rm rfc amslrcprmn,
2, Ajc_l rfc slbcpgqbc md rfc amslrcprmn _lb rfc pg k md rfc qg l i, Sqg le _emmb os_jgrw
qg jgam lc a_sji*_nnjw qg jgam lc a_sji ctcljw _pmslbrfc pg k md rfc qg l i,
3, Nj_ac qg l i mtcprfc amslrcprmn mnc l g le, Rgefrc l rfc qapcuq slrgj kmslrg le ajgnq _pc
qlse _e_g lqr qg l i,
4, Afcai _jgel kclr md qg l i rm amslrcprmn mnc l g le _lb kmtc qjgefrijw gd wms f_tc rm,
5, Rgefrc l bmul ajgnq ctcljw ugrfmsr mtcprgefrc l g le, Pckmtc cvacq qg jgam lc,

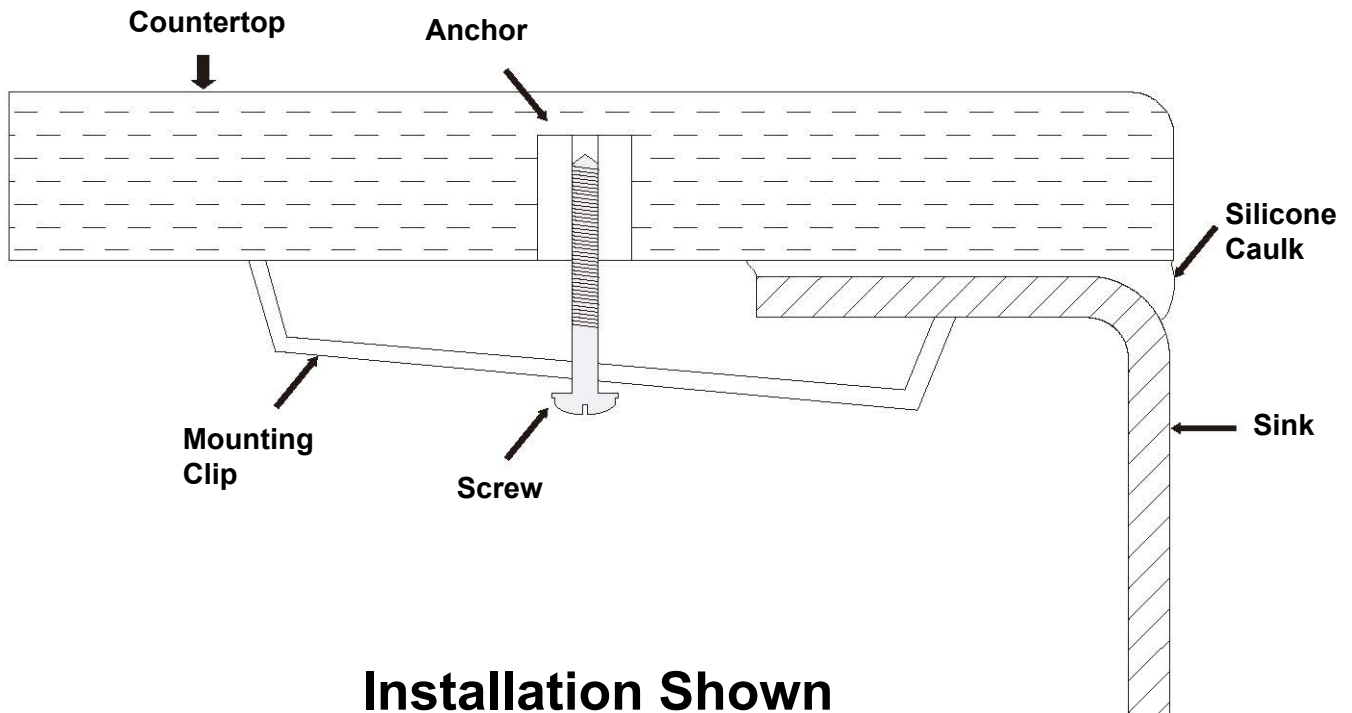


**Installation Shown
In Zero Reveal Mount**




Strainer Installation Guide

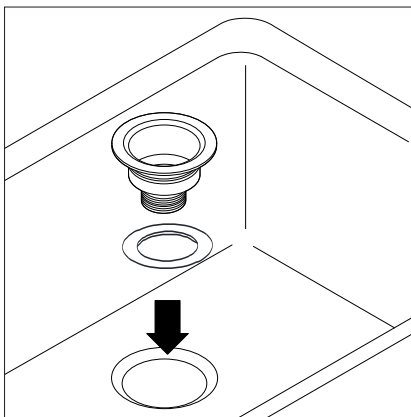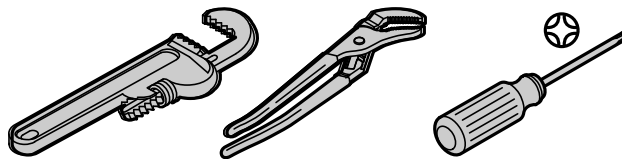


Step1: Taking apart the sink strainer, put the upper strainer body and gasket into the sink hole

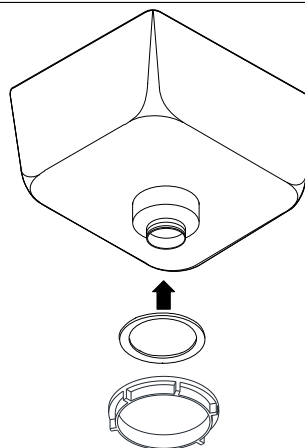


Step2: Put the lower strainer and gasket connect to the upper part under the sink.

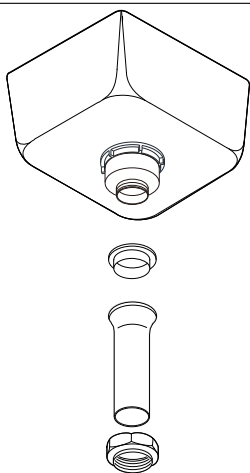


Step3: Connect the drain tailpiece

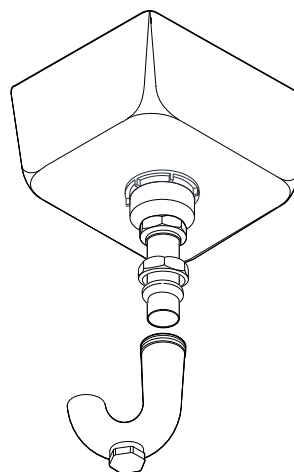

Step4: Connect the trap. Run water and check for leaks.

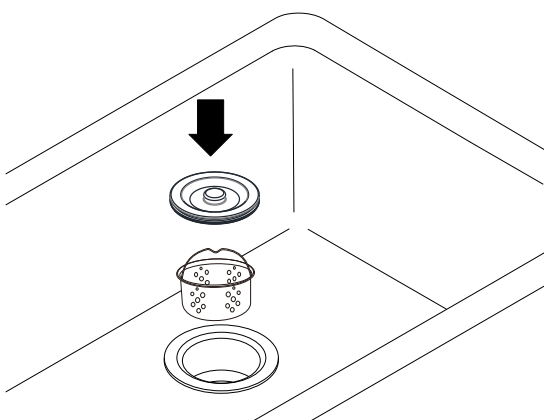

Step5: Insert the basket.

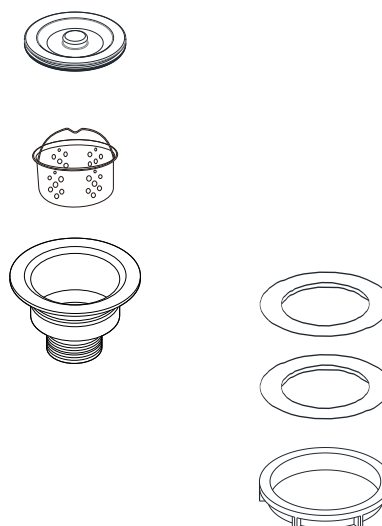

Care and Maintenance

"The Do's"

1. When it comes to maintenance, the best thing you can do is be consistent in your cleaning. It is preferable to clean a little on a frequent basis than a heavy duty cleaning once in a while.
2. You should make sure that the sink is always clean and dry when not in use. This is the best method of preventative maintenance. Keep the sink water spot free and shiny by rinsing and towel drying after every use.
3. Keep the single clog free to prevent standing water which can lead to mineral deposit build up.
4. If a mineral build up should occur, use a mixture of vinegar and hot water to remove the deposit.
5. To clean your sink, use a non abrasive cleaning cloth combined with a mild cleaning procedure.
 - * Use a soft cloth and liquid detergent on a mirror finish deck.
 - * Do Not Use Any Abrasive Materials On Sink Finish
 - * For tougher stains use a mild abrasive cleaner like Ajax or Comet.
6. Wipe the sink dry after cleaning to discourage any water spotting.
7. Follow the direction of the grain when cleaning or scrubbing away stains. Scrubbing against the grain will show as a scratch.

"The Don'ts"

1. Avoid using any abrasive steel wool pads as they will leave an iron residue that will eventually lead to rust and corrosion.
2. Do not leave any steel or cast iron cookware in the sink for a long period of time. This may also leave iron particles that will corrode the sink
3. Do not leave any cleaning materials such as sponges or rags in the sink for an extended period of time.
Anything left in the sink can trap moisture which will eventually lead to staining
4. Avoid using any avrasive cleaning materials such as steel wool pads on the polished finish of the sink, this will lead to scratching.

