





Contents	
I. Product Packing List	1
II. Appearance Brief	2
III. Product Specifications	3
IV. Product Instructions	4
1. APP download and installation	4
2. Accounts registration	5
3. QR Code Net-pairing (Recommendation)	6
3.2 QR Code Net-pairing (Recommendation)	7
4. Reset Camera	8
5. Family Sharing Setting	9
V. Operation Guide	10
1. Interface Introduction	11
2.1 Video Cloud Storage	11
2.2 Directional	11
2.3 Auto-Tracking Movement	12
2.4 Playback	12
2.5 Auto Patrol	13
2.6 Multi-View	14
3. Setting Introduction	15
4.1 Basic Settings	16
4.1-1 Basic Function Settings	16
4.2 Detection Alarm Settings	17
4.3 Memory Card Settings	18
VI. Help Center/More Service	19
VII. Installation Instructions	20
IX. Legal Declaration	21
X. After-sales Service Support	24
XI. Requirements for Power Supply	24
XII. Warranty Description	25

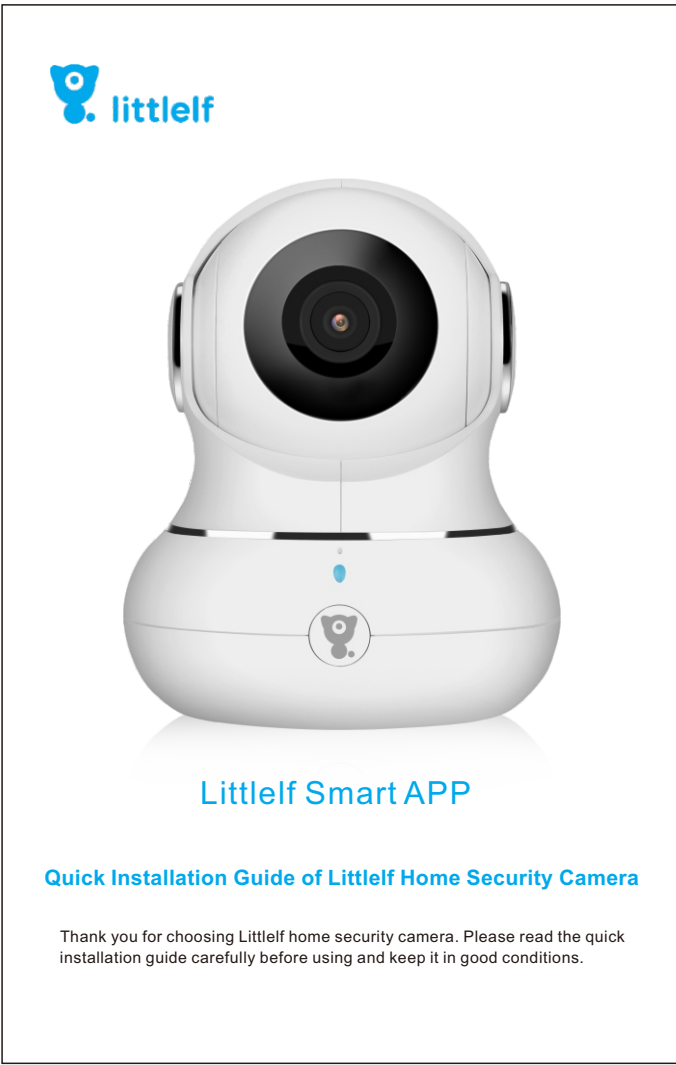

III. Product Specifications		
Littlelf Home Security Camera		
Lens	Glass, 3.6mm length F2.1	
Sensor	High Definition Color CMOS Sensor	
Resolution	2.0 Megapixel (1920x1080)	
Microphone	Built-in	
Speaker	Built-in 8Ω, 4W	
IR LEDs	11pcs LEDs 12P @850nm in series	
Pixel & TV Angle	H265420P, vertical 10P	
Infrared mode	Automatic or Manual	
Audio Compression	AAC/3.111, Two-way voice intercom	
Power Supply	DC5V 2A	
Net Weight	285g	
Dimensions	89*92*14.5mm	
Working Conditions	-10°C~40°C (F: 14°F~104°F) (humidity 10%~95% no condensation)	
Certificates	CE, RoHS, FCC	
LED Indicator	Working State	Solution
Red Lighting	Network is disconnected	1. Check the router is powered on properly. 2. Check the router is connected correctly. 3. Check the router if it prohibits the camera to access to the network.
Red Light Flashes Quickly	1. Restore factory settings (Reset/Factory Reset) 2. The camera is not powered on, waiting for the connection.	Waiting the camera to connect the network
Blue Light	Normal Status	/
Blue Light Flashes Quickly	WiFi Configuring	/
Off	Power Off	Check the camera is powered on. Turn on the status indicator on the APP.

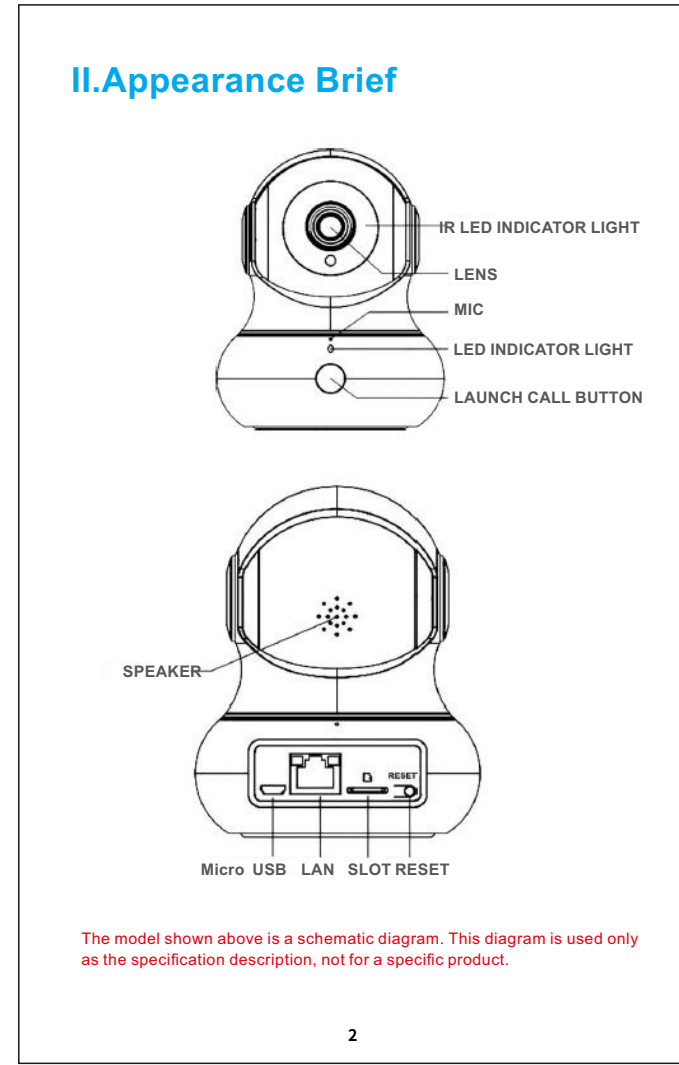