

User Manual

Model: GF2

Floodlight Cam

F2

EN

GNCC



Customer Service

Warranty

30 Days Return Policy and 12 Months Limited Warranty

Get Customer Service via oc.support@gncchome.com

Guide Channels

Please follow our social media to get more information and help.



YouTube

@GNCC HOME



Instagram

@gncc_home



Facebook


@GNCC Home



Facebook Group

@GNCC VIP Club


Packing List



Floodlight Cam



User Manual



A: Crossbar x1




B: EVA Gasket x1



C: Screw x3



D: Grounding screw (Green) x1



E: Ring x1 + Nut x1




F: Wire Nuts x3



Introduction

Your new Floodlight Cam is a smart home security system combining PIR motion sensed lighting and real-time video monitoring. It can monitor your home day and night, you'll always be the first to know when someone's in your yard, and talk to him right away.

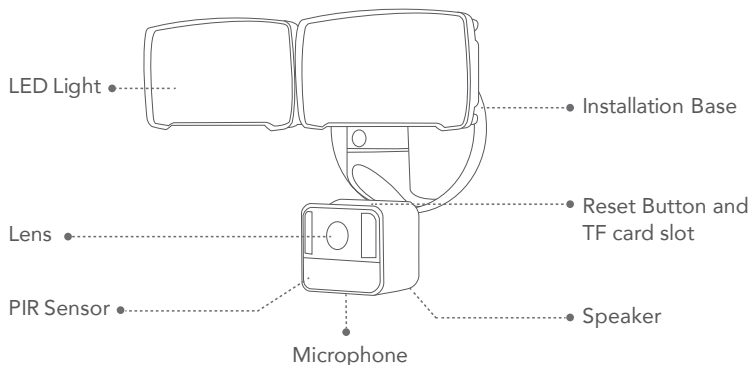

Notice




Do not dismantle or replace any parts of the product without professional guidance. This manual is for informational purposes only.

Working with electricity can be dangerous unless proper safety precautions are taken. We recommend that you hire a licensed electrician.

Recommended Installation Height


6.5-8.25 Feet above the Ground

In this range of height, the camera will provide a detection distance from up to 49 feet.

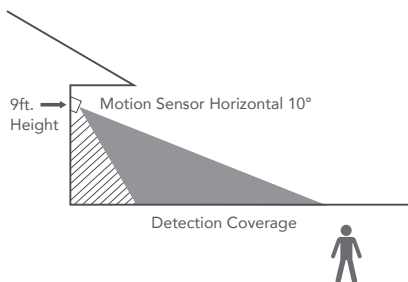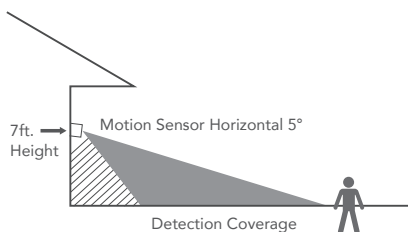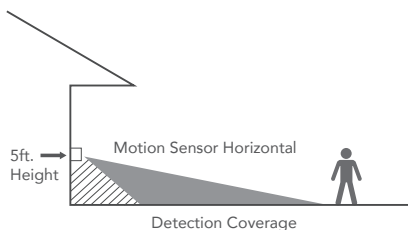

You can adjust the camera body up and down, left and right, for desired coverage area.

Tools You Need to Prepare (Not Included)

		
Flathead Screwdriver	Screwdriver	Silicone Sealant
		
Stepladder	Goggles	Pliers

Notice


To have the maximum product performance and avoid unnecessary environmental disturbance, please beware of the following conditions during product installation.

- 1) Do not install the product close to thermal sources, like air conditioner outdoor unit or kitchen smoke outlet, etc.
- 2) Make sure there are no reflective objects within the 5 feet range of the PIR sensor, which will interfere with the sensor's normal function.
- 3) Do not put the camera directly facing high pf LED light nearby, which may cause picture flicker problems.

CAUTION: PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN !

You Can Install the Floodlight Cam Follow These Steps:

- Step 1: Shut power off at the breaker (not the switch)

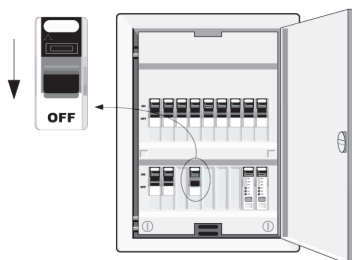


WARNING:

Risk of electrical shock!

- 1) Please make sure the power voltage is 110-120V AC, 60 Hz.
- 2) Fix the ground fixture properly.
- 3) Always follow code standards when installing wired connections.
- 4) Do not connect this light fixture to a dimmer switch or timer.
- 5) Do not install near combustible or flammable surfaces.

- Step 2: Mounting crossbar

Attach crossbar (A) to junction box (not included) with two long screws (C).
Ensure that the screw thread on the center hole is pointing away from the surface.

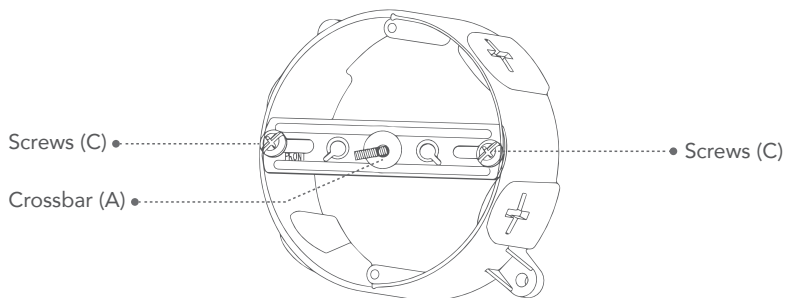

Notice


Floodlight Cam must be installed on a wall and on a UL listed junction box.

- Step 3: Wiring the floodlight cam

Remove the paper barrier from the EVA gasket (B), and adhere the gasket to the crossbar and outer edge of the round surface junction box. Ensure that the short screw on the crossbar is threading the hole of EVA gasket (B).


Then wire as below

- 1) Use a wire nut (F) to connect the white wires together. The white wire on Floodlight Cam is a neutral wire.
- 2) Use a wire nut (F) to connect the black wires together. The black wire on Floodlight Cam is a hot wire.
- 3) Connect the ground wire from the junction box of the ground screw (D, green) on the metal crossbar (A).

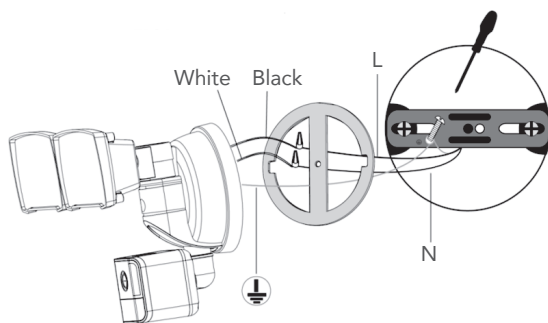

- Step 4: Mounting the floodlight cam

Make sure wire connections are secure. Carefully align wires into junction box. Mount the Floodlight Cam onto the crossbar(A) and secure with the Nut(E) , DO NOT over tightening.

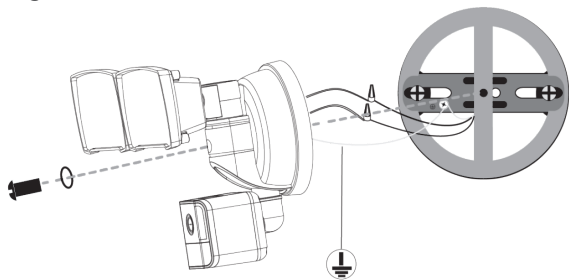


- Step 5: Restore power for test

Restore power at the breaker.


In Setup Mode: The Floodlight Cam will begin making a sound.

Now the Floodlight Light is working.

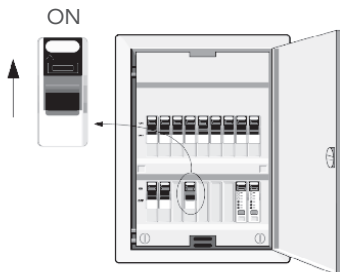

Last step: Waterproof treatment

After mounting the Floodlight Cam, then seal the junction box with silicone sealant to prevent water from leaking in. It is a very important and necessary protection in wet locations.

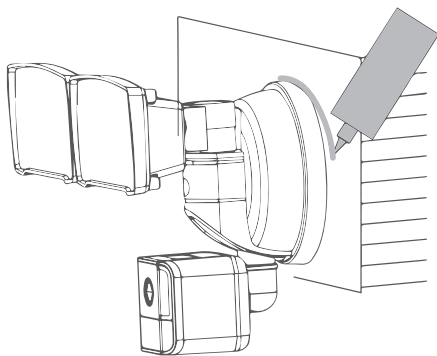

Notice

Please do not install the product in a harsh environment. The product may be damaged exposed to high temperature, high humidity, heavy dust/smoke, etc.



Continue with APP Setup

Before you begin, please make sure you have the following minimum requirements.

- 1) Smartphone Running iOS 9.0 / Android 5.0, or later.
- 2) Home Wi-Fi Network (2.4 GHz ONLY).
- 3) Internet Access with an Upload Speed (At Least 2 Mbps).

Step 1: Download WowCam APP


You can scan the QR code below, or search WowCam in Google Play or APP Store to download the APP.



Step 2: Add the Device

Make Sure Phone Bluetooth Function is ON.

Execute the app, create an account and log in, then click Add Device and follow the instruction to proceed.

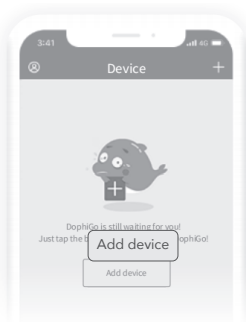

Notice

If the Floodlight Cam couldn't complete the setup process, we suggest checking from the following aspects.

- 1) Bluetooth Function
- 2) 2.4 GHz Wi-Fi
- 3) Wi-Fi password (It is the most common reason.)
- 4) Wi-Fi Signal Quality



How to Use APP

Select your Floodlight Cam on the APP home page, and then access various features and change settings via hints.

 Open a live video stream


 Turn the lights on and off

 Check alarm events

 Check Video Recordings

 Device Sharing


 Settings

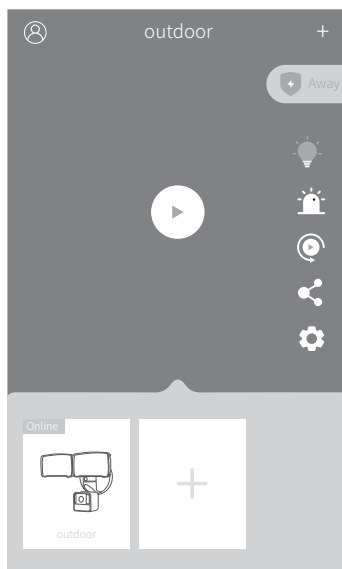

Notice

Due to continuous product improvement, all APP settings above are subject to change without prior notice, please always keep APP updated to the latest version.


-  Turn the lights on and off
-  Send messages and alerts
-  Speak to visitors and hear what they have to say.
-  Take a picture
-  Record a clip of video
-  Turn sound pick-up on and off
-  Select video image sharpness
-  Full screen

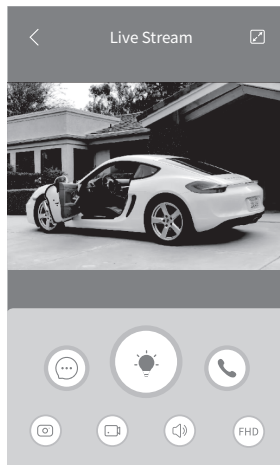

Enter Settings page, you can view and modify any settings, upgrade the firmware and unbind the device.


1) Light setting

Set a schedule for your lights to stay on.

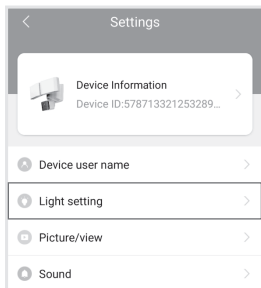


2) Picture/View

Rollover image and Modify video frequency.

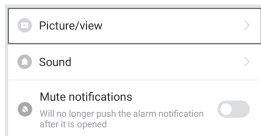

3) Home/away

Turn the alarm on and off, Select alarm schedule.

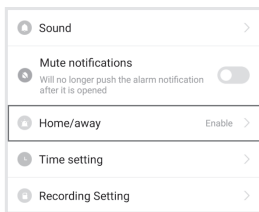


Device Sharing

Step 1:

Invite your friends to download and install "WowCam" App, and register to log in.

Step 2:

By clicking the sharing icon, you can choose "Account invitation" or "QR code invitation" to share the device.

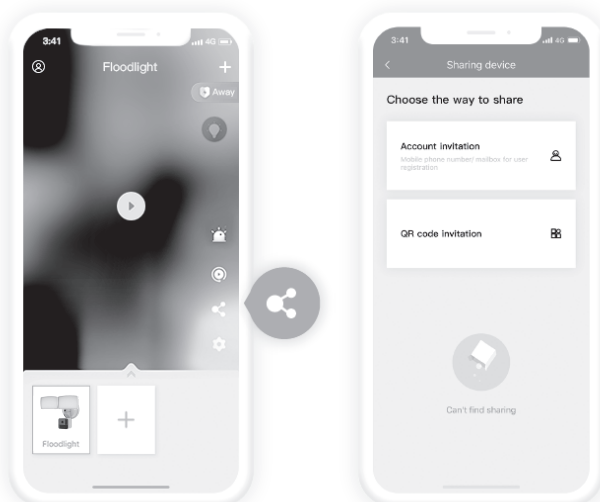

Troubleshooting Tips

- **Serious stroboscopic picture showing in live view?**

It is mainly caused by different AC frequency, which can be solved by changing the AC frequency in App settings-Picture/View.

- **Device is offline in device list?**

Check whether the device network is good.

If there is TF card inserted, please unplug the TF card, reset the device and router, then connect it again. (Insert the thimble into the reset hole and long press about 5 seconds.)

If the device still can't connect, please update the app version, and contact us for the device firmware upgrade.

oc.support@gncchome.com

- **How to do if the device is offline after changing a router or Wi-Fi password?**

Please reset the Cam (by pressing RESET key on the device for about 5 seconds, and a beep will be heard), and re-add the device in App.

- **Cannot check video playbacks?**

Try to plug the TF card again and make sure the recording mode is ON normally.

If there are still no video recordings, please go to Settings-Record Settings, disable the Record Switch, and format the TF card.

Besides, please try to insert a new TF card.





Made in China
Version 1.0

