



Instructions

Secop Gateway 105N9518



SECOP

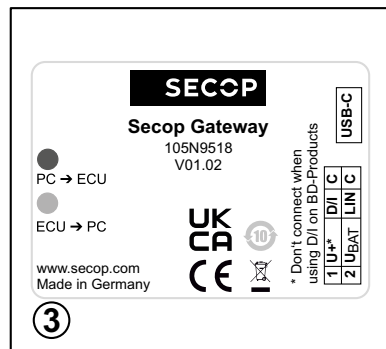

Gateway 105N9518 package contains:

Pos.	Description
1	USB 2.0 A/C cable
2	Gateway communication (Comm.) cables for various Secop compressor series/controllers
3	Secop Gateway Length, Height: 35 mm / Width: 64 mm / Depth: 58 mm


 Please install the latest **Virtual COM Port Driver** from Future Technology Devices International Ltd.: www.ftdichip.com

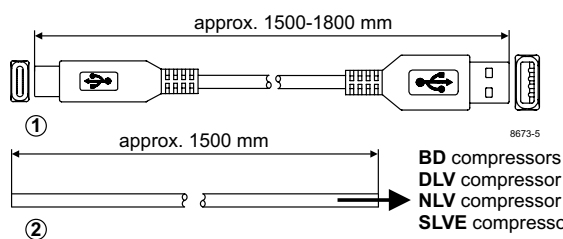


Instructions

Secop Gateway 105N9518

Secop BD-Series Compressor Connection

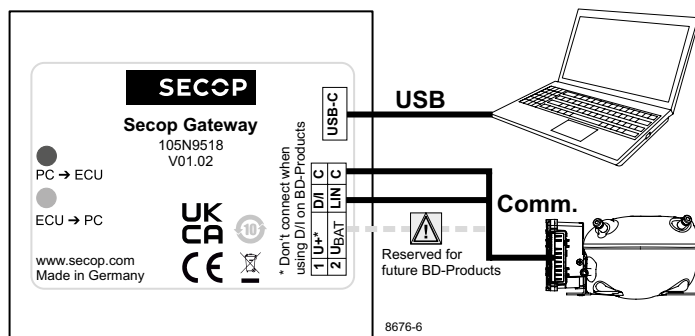

Secop DLV, NLV, SLVE Compressor Connection

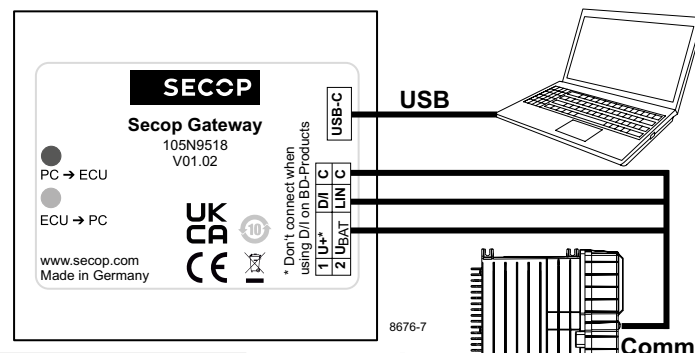

The new Secop Gateway 105N9518 replaces the 105N9501 interface. It is fully compatible with all existing Secop electronic units (controllers) featuring a communication interface.

It offers two communication modes: Secop transistor interface mode (I, D/I or COM pin name) as well as a full LIN interface (LIN pin name). The mode is selected by connecting or not connecting the U+ / UBAT pin. When U+ / UBAT is connected to a battery, the unit will switch to LIN mode.

BD-Series Compressors:

U+ / UBAT should only be connected when using a BD controller equipped with LIN.

On BD controllers equipped with a communication line labeled I, D/I or COM, the U+ / UBAT pin shall not be connected.

