

LEDj

Spectra Par 12T3 Exterior Fixture

User Manual



Order code: LEDJ269



WARNING

FOR YOUR OWN SAFETY, PLEASE READ THIS USER MANUAL CAREFULLY BEFORE YOUR INITIAL START-UP!

- Before your initial start-up, please make sure that there is no damage caused during transportation.
- Should there be any damage, consult your dealer and do not use the equipment.
- To maintain the equipment in good working condition and to ensure safe operation, it is necessary for the user to follow the safety instructions and warning notes written in this manual.
- Please note that damages caused by user modifications to this equipment are not subject to warranty.



IMPORTANT:

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorised modification to the equipment.

- Never let the power cable come into contact with other cables. Handle the power cable and all mains voltage connections with particular caution!
- Never remove warning or informative labels from the unit.
- Do not open the equipment and do not modify the unit.
- Do not connect this equipment to a dimmer pack.
- Do not switch the equipment on and off in short intervals, as this will reduce the system's life.
- Do not expose to flammable sources, liquids or gases.
- Always disconnect the power from the mains when equipment is not in use or before cleaning! Only handle the power-cable by the plug. Never pull out the plug by pulling the power-cable.
- Make sure that the available mains supply voltage is between 100~240V AC, 50/60Hz.
- Make sure that the power cable is never crimped or damaged. Check the equipment and the power cable periodically.
- If the equipment is dropped or damaged, disconnect the mains power supply immediately and have a qualified engineer inspect the equipment before operating again.
- If your product fails to function correctly, stop use immediately. Pack the unit securely (preferably in the original packing material), and return it to your Prolight dealer for service.
- Only use fuses of same type and rating.
- Repairs, servicing and power connection must only be carried out by a qualified technician. **THIS UNIT CONTAINS NO USER SERVICEABLE PARTS.**
- This lighting fixture is for professional use only - it is not designed for or suitable for household use. The product must be installed by a qualified technician in accordance with local territory regulations. The safety of the installation is the responsibility of the installer. The fixture presents risks of severe injury or death due to fire hazards, electric shock and falls.
- Warning! Risk Group 2 LED product according to EN 62471. Do not view the light output with optical instruments or any device that may concentrate the beam.
- **WARRANTY:** One year from date of purchase.

OPERATING DETERMINATIONS

If this equipment is operated in any other way, than those described in this manual, the product may suffer damage and the warranty becomes void. Incorrect operation may lead to danger e.g: short-circuit, burns and electric shocks etc.

Do not endanger your own safety and the safety of others!

Incorrect installation or use can cause serious damage to people and/or property.

Spectra Par 12T3





The exterior Spectra Par 12T3 features 12 x 3W tri-colour LEDs, delivering a smooth wash of colour, ranging from intense, rich saturated hues through to pastel shades. Controllable via the onboard 4 button LED menu system for auto, static colour or master/slave modes, with the option of DMX control for larger installations. The silent running, convection cooled heavy-duty alloy enclosure features IP65 rated connectors for both DMX and mains input/output.

- 12 x 3W tri-colour LEDs (RGB)
- Beam angle: 28°
- 2,157 Lux @ 2m (full on)
- 7kHz refresh rate
- DMX channels: 1/3/4/5 or 6 selectable
- Static colour, colour change, colour fade and master/slave modes
- 0 - 100% dimming and variable strobe
- Die-cast alloy, gasket sealed chassis
- Bracket allows for multiple rigging or floor standing applications
- 4 push button menu with LED display
- IP rated power input/output trailing connections
- IP rated 3-Pin DMX input/output trailing connections
- Convection cooled



Specifications	Spectra Par 12T3
Power consumption	40W
Power supply	100~240V, 50/60Hz
Dimensions	260 x 235 x 150mm
Weight	3kg
Order code	LEDJ269


28° - Lux					
FULL ON	8628	2157	958	539	345
R	2608	652	289	163	104
G	5504	1376	611	344	220
B	820	205	91.1	51.2	32.8

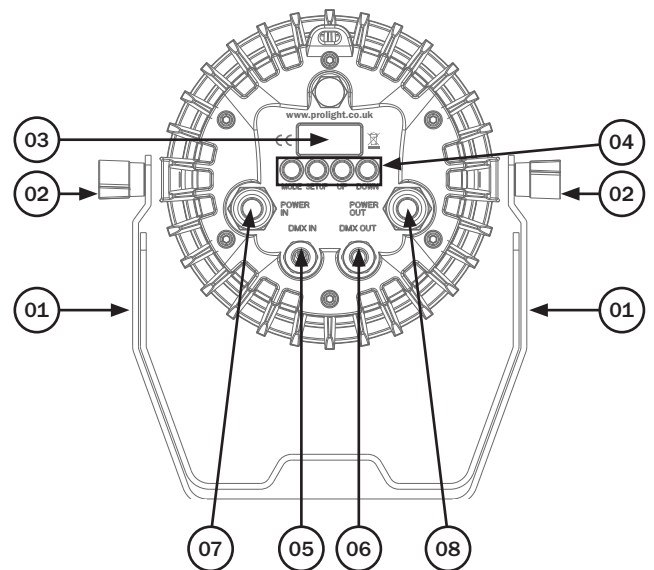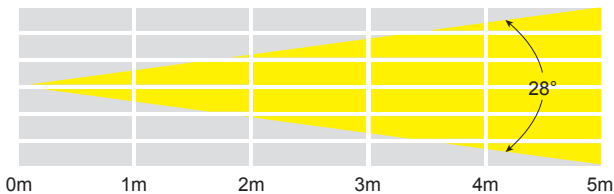

- 01 - Bracket
- 02 - Bracket tightening knobs
- 03 - LED display
- 04 - Function buttons
- 05 - IP rated DMX input
- 06 - IP rated DMX output

- 07 - IP rated power input
- 08 - IP rated power output

In the box: **1 x fixture,**
1 x power cable &
1 x user manual

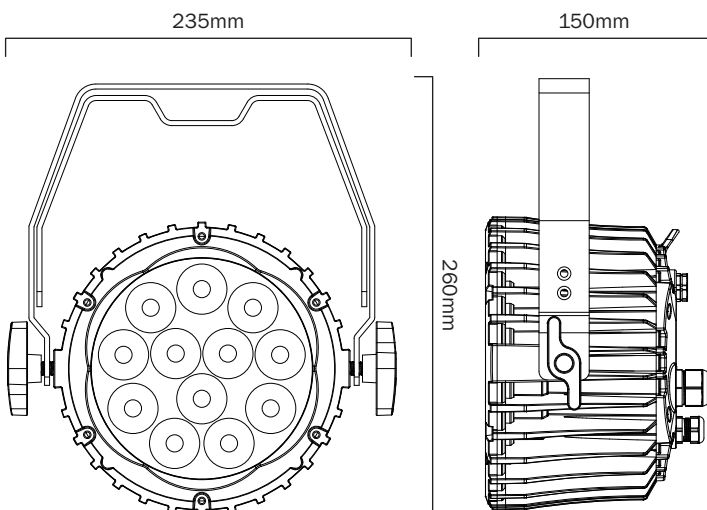

IMPORTANT! PLEASE NOTE: The LED display for this fixture has a menu locking function where after 30 seconds of inactivity it will lock. To unlock the menu hold the **“MODE”** and **“DOWN”** buttons for 3 seconds.

DMX channel mode:

Operating in a DMX control mode environment gives the user the greatest flexibility when it comes to customising or creating a show. In this mode you will be able to control each individual trait of the fixture and each fixture independently.

To access the DMX channel mode, press the **“MODE”** button on the rear of the unit to show *ddd !* on the LED display. Now press the **“SETUP”** button and use the **“UP”** and **“DOWN”** buttons to set the desired DMX address. Now press the **“SETUP”** button to choose one of the 1, 3, 4, 5 or 6 DMX channel modes, press the **“SETUP”** button to confirm the setting.

1 channel mode:

Channel	Value	Function
1	000	No function
	001-022	Red
	023-045	Green
	046-068	Blue
	069-091	Cyan
	092-114	Yellow
	115-137	Orange
	138-160	Pink
	161-183	Purple
	184-206	Dark Blue
	207-229	Pale Green
	230-252	White
	253-255	Warm White

4 channel mode:

Channel	Value	Function
1	000-255	Red (0-100%)
2	000-255	Green (0-100%)
3	000-255	Blue (0-100%)
4	000-255	Master dimmer (0-100%)

5 channel mode:

Channel	Value	Function
1	000-255	Red (0-100%)
2	000-255	Green (0-100%)
3	000-255	Blue (0-100%)
4	000-255	Master dimmer (0-100%)
5	000-255	Strobe (slow-fast)

3 channel mode:

Channel	Value	Function
1	000-255	Red (0-100%)
2	000-255	Green (0-100%)
3	000-255	Blue (0-100%)



6 channel mode:

Channel	Value	Function
1	000-255	Master dimmer (0-100%)
2	000-255	Red (0-100%) (only when channel 6 is set to 0)
	000-008	Red
	009-017	Orange
	018-026	Yellow
	027-035	Spring Yellow
	036-044	Lime
	045-053	Light Yellow
	054-062	Light Green
	063-071	Green
	072-080	Pastel Green
	081-089	Light Cyan
	090-098	Cyan
	099-107	Light Blue
	108-116	Medium Blue
	117-125	Blue
	126-134	Violet
	135-143	Purple
	144-152	Magenta
	153-161	Pink
	162-170	Light Pink
	171-179	Pastel Blue
	180-188	Pastel Green
	189-197	Pastel Yellow
	198-206	Pastel Purple
	207-215	Pastel Cyan
	216-224	Turquoise
	225-233	Pastel Pink
	234-242	Neutral White
	243-251	Warm White
	252-255	Cool White

To use static colours channel 6 should be set between 001-025

Channel 2 is used as program speed (0-255 slow-fast) when channel 6 is set between 026-255

3	000-255	Green (0-100%)
4	000-255	Blue (0-100%)
5	000-009	No function
	010-255	Strobe (slow-fast)
6	000	No function
	001-025	Static colours
		Use channel 2 for colour selection
	026-051	7 colour fade in/out
	052-077	3 colour fade in/out
	078-103	7 colour change
	104-129	3 colour change
	130-155	7 colour fade
	156-181	3 colour fade
	182-207	Red fade in/out
	208-233	Green fade in/out
	234-255	Blue fade in/out
		Use channel 2 for program speed (0-255 slow-fast)

Master/slave mode:

To set the master unit, press the **"MODE"** button on the rear of the master unit then select your desired program (sound active, auto, static colour or one of the built-in programs). To set the other units in slave mode, press the **"MODE"** button on the rear of the unit to show **SLAVE** on the LED display and press the **"SETUP"** button to confirm the setting. The units will now run in sequence with the master unit.

Please ensure that all slave units are set to the same DMX channel mode as the master unit.

RGB colour mix mode:

To access the colour mix mode press **"MODE"** until **COLR** shows on the LED display.

Now press the **"SETUP"** button and use the **"UP"** and **"DOWN"** buttons to select the brightness between **0000 ~ 0255**. Press the **"SETUP"** button and repeat for green (**G**) and blue (**B**).

Value: 000 - 255 (000 = low brightness, 255 = high brightness)

Factory reset:

To reset the fixture to factory settings, press the **"MODE"** button and use the **"UP"** and **"DOWN"** buttons to show **SETE** on the LED display. Now press the **"SETUP"** button and **0000** will be displayed.

Press the **"SETUP"** button. The unit will now perform a factory reset.

Fixture temperature check:

To check if the fixtures temperature is normal, press the **"MODE"** button and use the **"UP"** and **"DOWN"** buttons to show **TEMP** on the LED display. Now press the **"SETUP"** button and use the **"UP"** and **"DOWN"** buttons to select **TEMP**. Now press the **"SETUP"** button.

The unit will now either of the following:

TEMP - Fixture temperature normal

TEMP - Fixture temperature abnormal, please power down the unit and leave to cool.

If the problem persists please contact your Prolight dealer for service.

Software version:

To display the fixtures software version, press the **"MODE"** button and use the **"UP"** and **"DOWN"** buttons to show **TEMP** on the LED display. Now press the **"SETUP"** button and use the **"UP"** and **"DOWN"** buttons to select **VER**. Now press the **"SETUP"** button.

The unit will now display the software version.

Auto mode:

To access the auto mode press **"MODE"** until the display shows **Auto** on the LED display. The fixture will now run through its built in programs **Pr.02 ~ Pr.10**. To exit out of any of the above options, press the **"MODE"** button. NOTE: The user can set up the speed and flash speed for **Pr.02 ~ Pr.10** under the built in programs mode. Changing this here will then take effect when running auto mode.

Built-in program mode:

To access the built-in program mode press **"MODE"** until the display shows **Pr** on the LED display. Press the **"SETUP"** button and use the **"UP"** and **"DOWN"** buttons to select a program from **Pr.01 ~ Pr.10**. Press the **"SETUP"** button to confirm the setting.

To change the speed of the selected program press the **"SETUP"** button and then use the **"UP"** and **"DOWN"** buttons to select any value from **SP00 ~ SP99**. Press the **"SETUP"** button to confirm the setting, then use the **"UP"** and **"DOWN"** buttons to select and value from **F500 ~ F599** for the strobe feature. Press the **"SETUP"** button to confirm the setting.

In **Pr.01** you are able to set a specific static colour. When in **Pr.01** press the **"SETUP"** button and then use the **"UP"** and **"DOWN"** buttons to go through the static colours. Press the **"SETUP"** button to confirm the setting, then use the **"UP"** and **"DOWN"** buttons to select and value from **F500 ~ F599** for the strobe feature. Press the **"SETUP"** button to confirm the setting.

To exit out of any of the above options, press the **"MODE"** button.

Programs:

Pr.01	Static colour
Pr.02	7 colour fade in/out
Pr.03	3 colour fade in/out
Pr.04	7 colour change
Pr.05	3 colour change
Pr.06	7 colour fade
Pr.07	3 colour fade
Pr.08	Red fade in/out
Pr.09	Green fade in/out
Pr.10	Blue fade in/out

Static colours:

-0FF - Blackout
1--r - Red
2--rY - Orange
3--uY - Lime Green
4--g - Green
5--gb - Cyan
6--b - Blue
7--rb - Violet
8--ru - Magenta
9--rY - Yellow
10CU - Cool white
11UU - Warm white

Menu system

Address setting	d001~d512
DMX mode	1CH, 3CH, 4CH, 5CH, 6CH
Slave mode	SLAU
RGBW colour mix mode	Color r.000~r.255 Red g.000~g.255 Green b.000~b.255 Blue
Factory reset	SEt r-5t
Temperature check	Info t-on - Normal t-nn - Abnormal
Software version	Info UPr
Auto mode	AUTO
Built-in program	Pr.01 Static colour Pr.02 7 colour fade in/out Pr.03 3 colour fade in/out Pr.04 7 colour change Pr.05 3 colour change Pr.06 7 colour fade Pr.07 3 colour fade Pr.08 Red fade in/out Pr.09 Green fade in/out Pr.10 Blue fade in/out SP00~SP99 (speed) F500~F599 (flash)

Setting the DMX address:

The DMX mode enables the use of a universal DMX controller. Each fixture requires a “start address” from 1- 512. A fixture requiring one or more channels for control begins to read the data on the channel indicated by the start address. For example, a fixture that occupies or uses 7 channels of DMX and was addressed to start on DMX channel 100, would read data from channels: 100,101,102,103,104,105 and 106. Choose a start address so that the channels used do not overlap. E.g. the next unit in the chain starts at 107.

DMX 512:

DMX (Digital Multiplex) is a universal protocol used as a form of communication between intelligent fixtures and controllers. A DMX controller sends DMX data instructions from the controller to the fixture. DMX data is sent as serial data that travels from fixture to fixture via the DATA “IN” and DATA “OUT” XLR terminals located on all DMX fixtures (most controllers only have a data “out” terminal).

DMX linking:

DMX is a language allowing all makes and models of different manufactures to be linked together and operate from a single controller, as long as all fixtures and the controller are DMX compliant. To ensure proper DMX data transmission, when using several DMX fixtures try to use the shortest cable path possible. The order in which fixtures are connected in a DMX line does not influence the DMX addressing. For example; a fixture assigned to a DMX address of 1 may be placed anywhere in a DMX line, at the beginning, at the end, or anywhere in the middle. When a fixture is assigned a DMX address of 1, the DMX controller knows to send DATA assigned to address 1 to that unit, no matter where it is located in the DMX chain.

Also remember that DMX cable must be daisy chained and cannot be split.

DATA cable (DMX cable) requirements (for DMX operation):

This fixture can be controlled via DMX-512 protocol. The DMX address is set on the back of the unit.

Further DMX cables can be purchased from all good sound and lighting suppliers or Pro Light Concepts dealers. Please quote:



LEDJ 1m Interior - Exterior DMX cable	LEDJ 1m Exterior DMX cable	LEDJ 2m Exterior DMX cable	LEDJ 5m Exterior DMX cable	LEDJ 10m Exterior DMX cable
				
Order code: LEDJ91	Order code: LEDJ141	Order code: LEDJ142	Order code: LEDJ143	Order code: LEDJ144

LEDJ 1m Exterior Power cable	LEDJ 2m Exterior Power cable	LEDJ 5m Exterior Power cable	LEDJ 10m Exterior Power cable	LEDJ Spectra Series End Cap Set
				
Order code: LEDJ146	Order code: LEDJ147	Order code: LEDJ148	Order code: LEDJ149	Order code: LEDJ93

Notice:

Be sure to follow the diagrams below when making your own cables. Do not connect the cables shield conductor to the ground lug or allow the shield conductor to come in contact with the XLRs outer casing. Grounding the shield could cause a short circuit and erratic behaviour.

Pin Configuration	
3-Pin	5-Pin
	Pin 1 - Ground
	Pin 2 - Negative
	Pin 3 - Positive
-	Pin 4 - N/C
-	Pin 5 - N/C

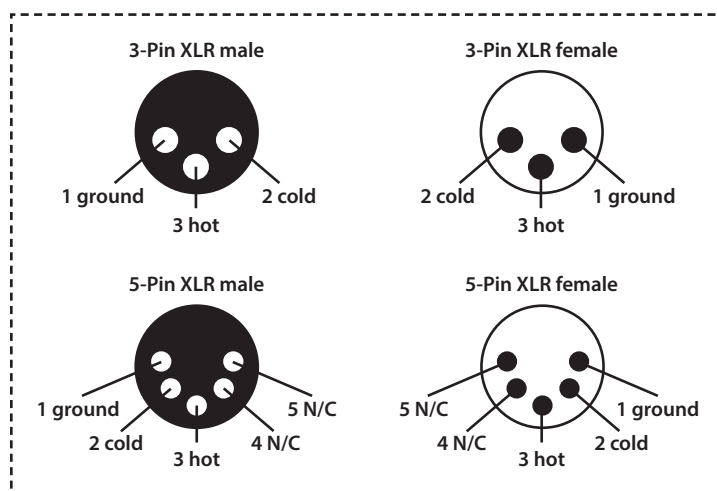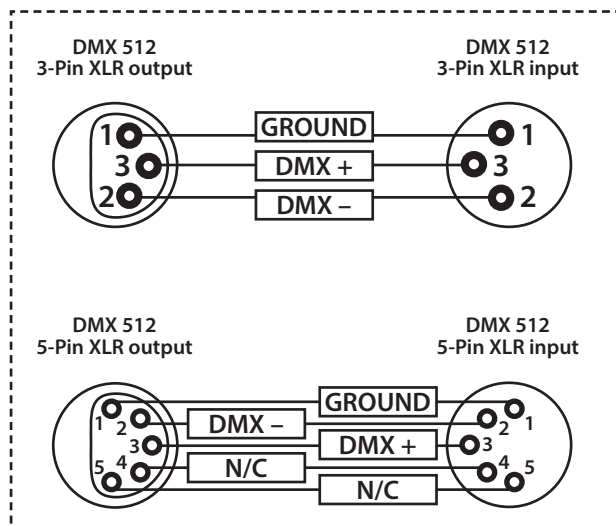


Line termination:

When longer runs of cable are used, you may need to use a terminator on the last unit to avoid erratic behaviour.

Using a cable terminator will decrease the possibilities of erratic behaviour.


(3-pin - Order ref: CABL90,

5-pin - Order ref: CABL89)

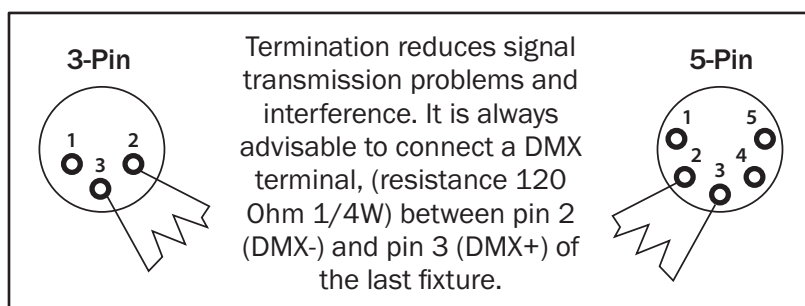

5-pin XLR DMX connectors:


Some manufactures use 5-pin XLR connectors for data transmission in place of 3-pin. 5-pin XLR fixtures may be implemented in a 3-pin XLR DMX line. When inserting standard 5-pin XLR connectors in to a 3-pin line a cable adaptor must be used. The diagram below details the correct cable conversion.

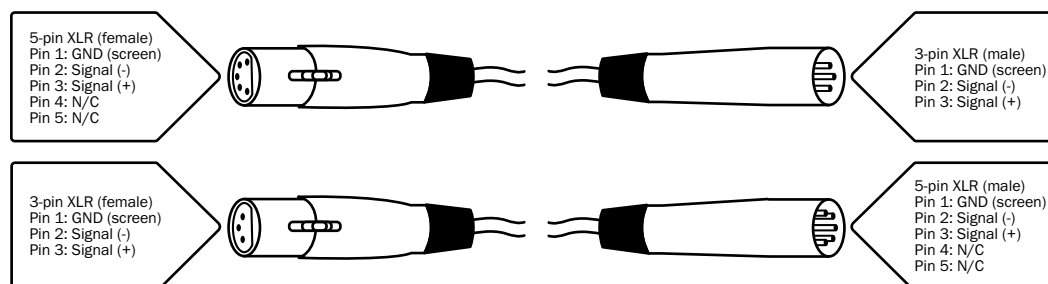

Power linking:

This fixture provides power linking via the power output on the rear allowing multiple units to be connected together. The maximum number of fixtures that can be connected is 20 fixtures @ 240V or 10 fixtures @ 120V (including the first fixture). After the maximum number of fixtures are connected a new power run will need to be started.

Please note: Caution should be used when power linking other fixtures to the Spectra Par 12T3 as the power consumption of other fixtures will vary. Fixtures fitted with lamps often require 2/3 times more current on startup, these may require their own power source.

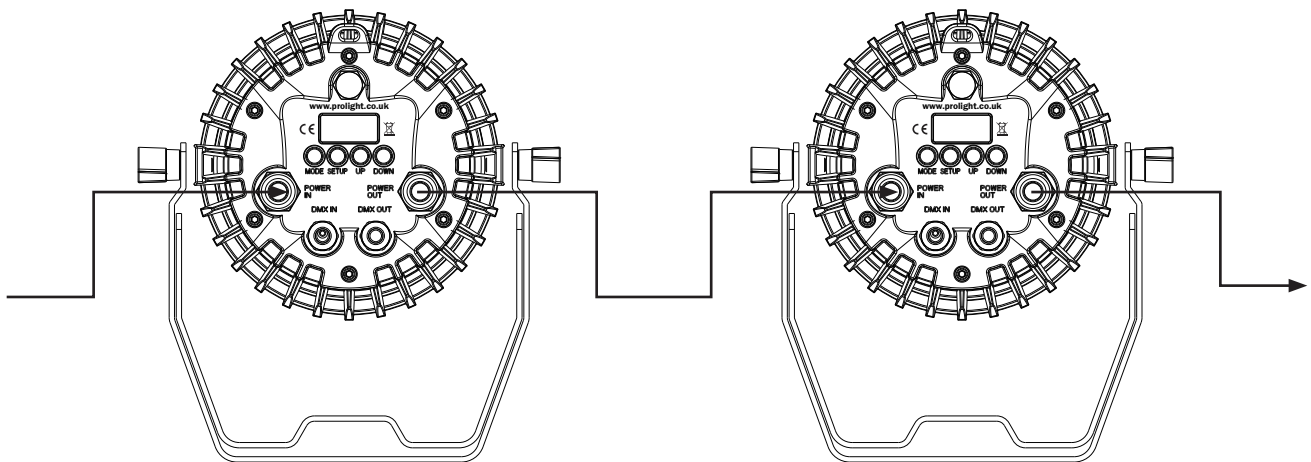



Correct Disposal of this Product (Waste Electrical & Electronic Equipment)

**(Applicable in the European Union and other European countries
with separate collection systems)**

This marking shown on the product or its literature, indicates that it should not be disposed of with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.



LEDj

