

Ultra Connection Kit 24 V



Product code: 79007724




With the MLI Ultra Relay and Fuse Connect Kit, you can easily install all the required safety accessories in a safe, efficient, and compact way right on top of the MLI Ultra battery.

Without the need for power tools, you can get your system, safe and ready in just a few simple steps.

- Fast and easy installation.
- All necessary safety accessories in one kit*.
- Pre-assembled on an easy to mount bracket.
- Perfect fit for MLI Ultra 24/5500.

* The T-fuse itself is not included in the kit. Order the right fuse rating (Compatible fuse rating: 225 – 400 Amp Class T-fuse) based on the requirements of your installation.

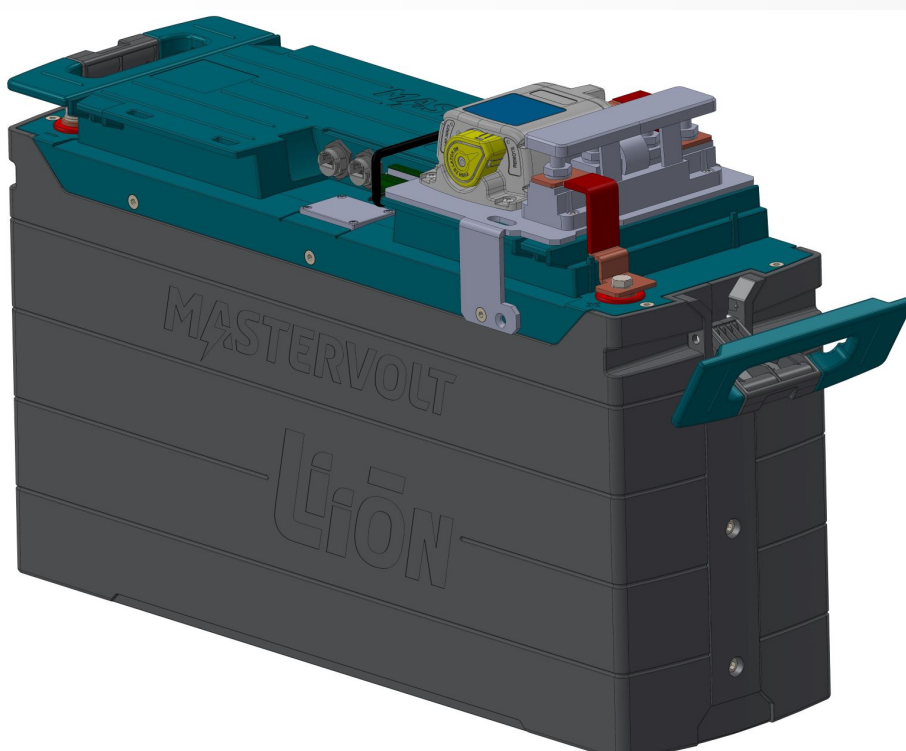

Specifications

General specifications

Compatibility	MLI Ultra 24/5500
Max. current	300 A
Operating temperature	-25 °C to 50 °C -13 to 122 °F
Dimensions	total height increases by 65 mm / 2.5 inch
Weight	total weight increases by 2 kg 0.0 lb
Delivered with	mounting bracket, safety relay, T-fuse holder, busbar conductor (2x)

Technical specifications

Safety relay	24 V DC - 500 A
Max. voltage	64 V

