

SKY

Rack LED Top Light

The SKY fixture design allows for high-performance lighting in vertical and low mounting grow applications. This powerful, full-spectrum light is intended for experienced growers from the vegetative stage through the higher PPFD flower stage.



ORDERING INFORMATION

MODEL	TYPE	VOLTAGE	ACCESSORIES
SKY			EXT
	7 FLOWER (720W)	120 120-277V	
	6 FLOWER (630W)	277 277-480V	
	3 VEG (340W)		

DRIVER

World class LED driver. Input options Auto Sensing 90V-305V and 245V-528V.

CONTROL

0-10V (Option) Fixture is equipped with an external RJ14 cable and allows for daisy chained installation of up to 160 fixtures per controller (80 fixtures per controller port).



DIMMING

SKY 7 is dimmable in 720W, 580W, 430W, and 290W.
SKY 6 is dimmable in 630W, 500W, 380W, and 250W.
SKY 3 is dimmable in 340W, 270W, 200W, and 140W.

SPECTRUM

Our Broad Spectra offers light emission across the PAR 400-700nm wavelength range. We balance efficiency with quality of light to achieve the desired plant response and work environment.

CHROMACITY

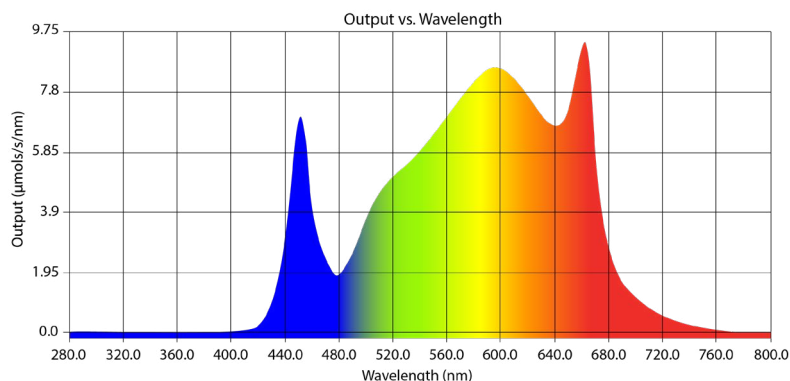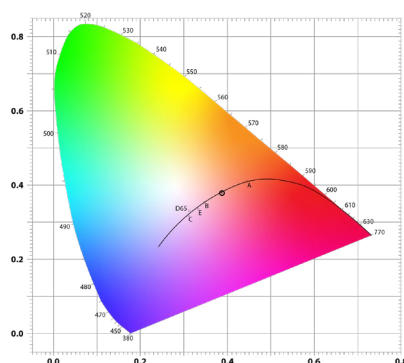


SPECIFICATIONS

INPUT POWER	340W, 630W, or 720W	CERTIFICATION	UL8800, UL 1598 Wet
EFFICACY	2.53, 2.46, or 2.43 $\mu\text{mol}/\text{J}$	WARRANTY	5 Year Standard
PPF	860, 1550, or 1750 $\mu\text{mol}/\text{s}$	AMBIENT TEMP	-10°C / 40°C
INPUT VOLTAGE	120V - 277V; 277V - 480V	STORAGE	-40°C / 85°C
MOUNTING	$\geq 6"$ Above Canopy	ACCESSORY	6' Extension Power Cord
THERMAL	Passive	FIXTURE LENGTH	45.7"
LIFE	50,000 hrs	FIXTURE WIDTH	41.7"
POWER FACTOR	> 90%	FIXTURE HEIGHT	4.5"
IP RATING	IP66	FIXTURE WEIGHT	27.5lb / 12.5 kg

Line Voltage Daisy Chain Options Available, Consult Factory For Configurations.

DIMENSIONS

Fixture:

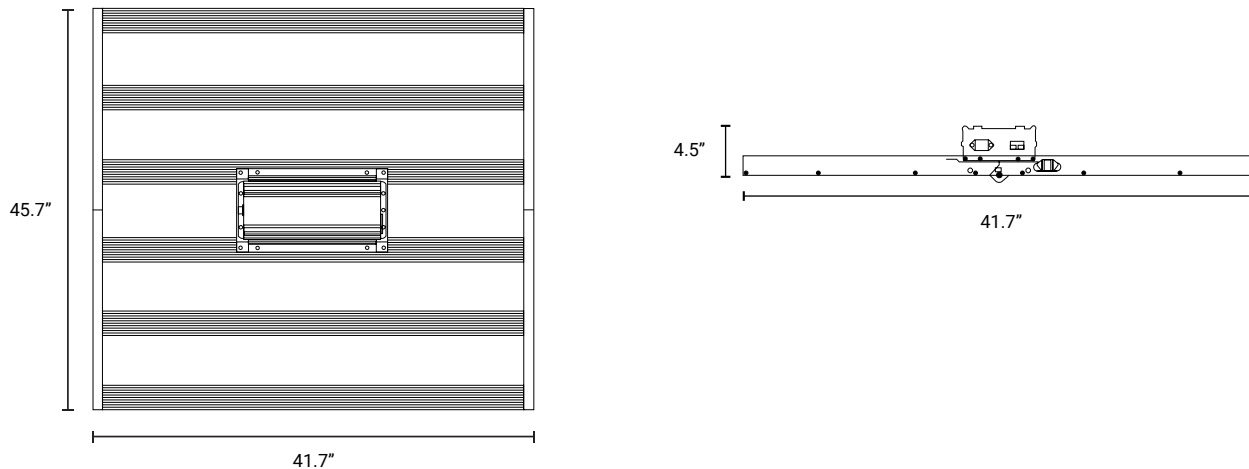

Power Supply:

