


Scope of application:

1. The product can be connected and played directly, without any need for additional game platform, complicated setup and activation!
(Android 6.0 or later version, iOS11.0 or later system)
2. The product is suitable for wireless connection with cell phones/tablets/smart TVs intalled with Android/iOS, and PC installed with Win 7/8/10 OS;
It can be connected wirelessly to play games;
3. It is designed with the built-in phone holder (extension≤ 85mm);
4. It has ergonomic structure, which is comfortable to hold;

★ This product may not be compatible with some mobile phones due to different operating systems (eg, mobile phones with MTK platform);

★ Some games cannot be played with this product due to external factors, such as official software upgrades or source code changes in game platform, for which our company shall not be held liable.
The scope of application is subject to our final interpretation.

Illustration of buttons

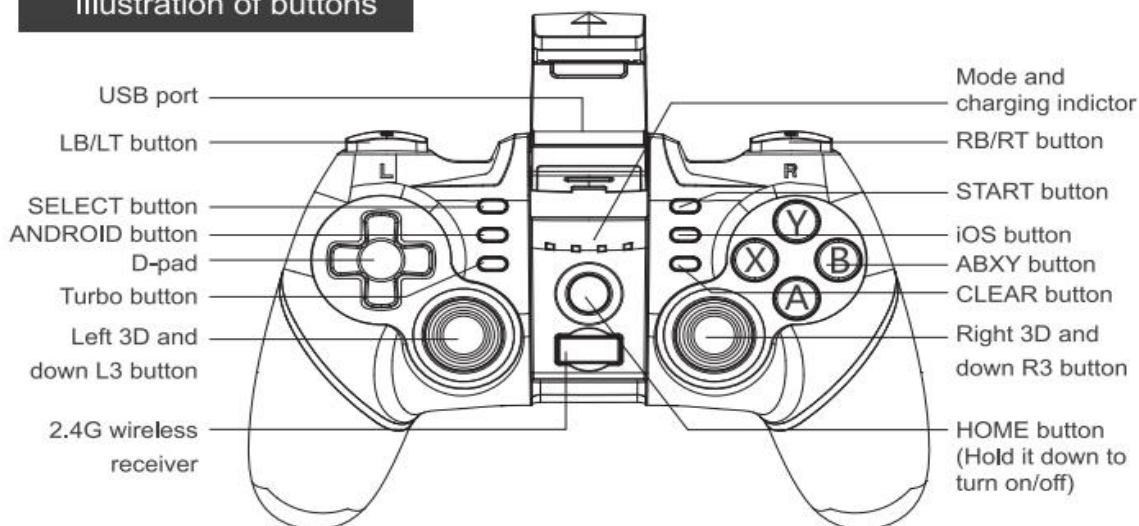

Characteristic parameters:

1. Size: L163*W105*H65mm;
2. Weight: 195 ± 5g;
3. Working voltage: DC3.7V;
4. Working current: <15mA;
5. Static current: <15uA;
6. Continuous operation during: >15H;
7. Input voltage/current: DC5V/500mA;
8. Charging time: about 3 hours;
9. BT 4.0, transmission distance: ≤ 8M;
10. Battery capacity: 380mAh;
11. Battery standby time: 30 days after being fully charged;



Operation instructions:

Android V3 direct play:



Android V3 direct play:

Press and hold down ANDROID+  buttons simultaneously for 2 seconds to start pairing for V3 direct play (Android), and the LED1 indicator on the gamepad flashes quickly. When the device name "PG-9156" is available on the Android phone/tablet, select and connect it! After it is successfully connected, the LED1 indicator will be always on! You can directly press the  button, and LED1 indicator will flash slowly, which will be automatically connected!

2.4G mode:

To connect it to a PC, you need to switch on the 2.4G receiver built in the gamepad (XBOX 360 mode):

Press and hold down the L1+  buttons for 3 seconds to start the 2.4G receiver mode. The LED1 and LED2 indicators on the gamepad flash quickly. After it is successfully connected, the LED1 and LED2 indicators are always on! If it has been connected, you can directly press the  button, the LED1 and LED2 indicators flash slowly, and the product is automatically connected!

