



OPERATION MANUAL

Wireless Charging Alarm Clock

Main Features

- 1. Alarm Setting:**
 - Three separate alarm times set
- 2. Time Display Mode:**
 - 12 / 24 hour time display optional
- 3. Calendar Mode:**
 - Display month and date
- 4. Temperature Mode:**
 - °F/°C display optional, range from 32°F-122°F (0°C- 50°C)
- 5. Display Modes:**
 - Three different display mode
- 6. Power Saving Mode:**
 - Activate display by sound or touch
- 7. Memory Function:**
 - 3V built-in battery to keep time and alarm settings
- 8. Wireless Charging:**
 - Supports with the Qi certificate devices to wireless charge
- 9. Power supply:**
 - 3 x AAA Batteries or USB Cable

Introduce of Displays

Different alarm screen displays have different meanings which are of importance for subsequent operations. Please familiarize yourself with them.



Calendar Mode(Years)



Calendar Mode (Months and Dates)



Time Mode



Turn off Alarm 1

Introduce of Displays



Turn on Alarm 1



12-Hour Time System



24-Hour Time System



Turn on Saving Power Mode



Turn off Saving Power Mode



Display Mode 1



Display Mode 2



Display Mode 3

Operating Instructions



Please pull Insulation Sheet out before using

Mode Switch

After power on, enters the time setting mode, press the 'SET' button to check below in sequence Time --> Calen-dar --> Alarm 1, Alarm 2, Alarm 3



Time Mode



Calendar Mode



Alarm 1



Alarm 2



Alarm 3

- 1. The setting mode will return to time display mode if there is no operation for 15 seconds.
- 2. Press the 'SET' button for 2 seconds to start setting, an through the 'UP/DOWN' button adjusts the digitals, hold the 'UP/DOWN' buttons to speed up the scanning of the digitals. When set completed, press the 'SET' button to complete the operation.



Time Setting

1.Under the Time Mode, press the '**SET**' button for 2 seconds to set the clock.



2.Press the '**UP/DOWN**' button to change the 12/24 hours display. Press the '**SET**' button again to end setting.



3.Press the '**UP/DOWN**' buttons to adjust the hour and minute digits. Press the '**SET**' button to complete the operation.



PS:When the 12-hour format is set, the PM indicator on the top left corner will appear in the afternoons.

Date Setting

1.Under the Calendar Mode, press the '**SET**' button for 2 seconds to set the Year. Press the '**UP/ DOWN**' buttons to adjust digitals. Press the '**SET**' button to complete the operation.



2.Then set the Month and Date. Press the '**SET**' button to complete the operation. Press the '**SET**' button to complete the operation.




Convert °F/°C

Press the '**DOWN**' button for 2 seconds to switch between Celsius(°C) and Fahrenheit(°F)



Alarm Setting

1.Under the Alarm Mode A1, press the '**UP**' button to turn on the alarm (on A1) and press again to turn it off (--A1).
2.Press the '**SET**' button for 2 seconds and the display will flash now you can set the alarm time.
3.Press '**UP/DOWN**' buttons to adjust the alarm time.
4.Press the '**SET**' button to complete the operation.

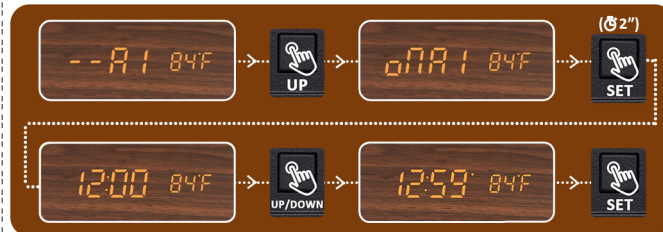

*A2 and A3 alarm can be set in the same way as A1.


Keep the Screen Display

1.Under Time Mode, press the '**DOWN**' button.
2.When the clock display '**oNSd**', press '**DOWN**' button again. Then the screen will keep display.



Display Modes

Press the '**UP**' button to switch between dP-1, dP-2, dP-3

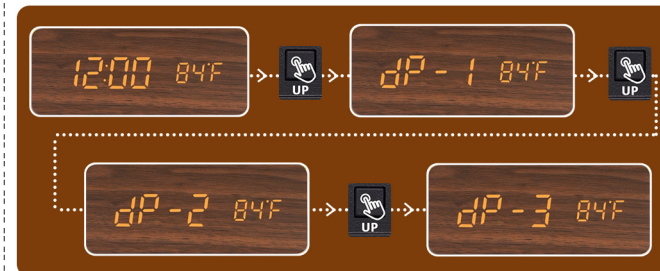

After-Sales Service

We have also prepared a video introduction for you, you can scan the QR code on the right to watch it on youtube.

If you have any problem, please feel free to contact the sellers. We will provide a 100% after-sales service.

E-mail: Fancy_US@outlook.com



YouTube