



NIGHTWATCH[®]


QUICK START GUIDE

For detailed information on operation and use, please refer to the **NIGHTWATCH[®] User Guide**.
Available for download via the Resources tab within the App.




Powering Your Device

Fully charge your NIGHTWATCH® device prior to use.

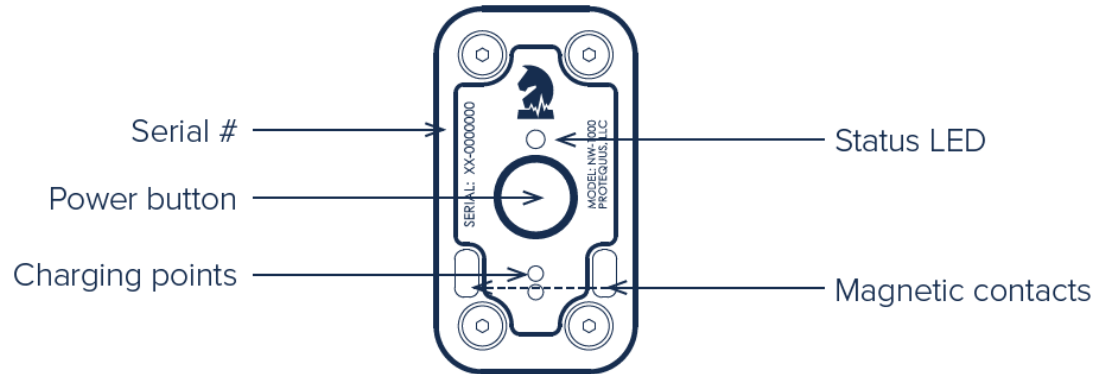

Power Your Device **ON/OFF**



ON: **PRESS** and **HOLD** power button ~2 secs (*release when you see **white** LED*)

OFF: **PRESS** and **HOLD** power button ~5 secs (*release after **white** LED turns off*)

CHARGE Your Device



CHARGE: **ATTACH** magnetic charger to ID plate on halter (*turn on device if you do not see **green** LED*)



CHARGING (*blinking*)



FULLY CHARGED (*solid green*)



Setting Up Your Device

Follow these steps to get your NIGHTWATCH® device ready for use.

Create ACCOUNT

- 1 **DOWNLOAD** the NIGHTWATCH® App on the App Store or Google Play to your mobile device.*
- 2 **CREATE** an account by launching the NIGHTWATCH® App and selecting “Create Account.”



Create Account



Add Device to ACCOUNT

- 3 **ADD** a new device to your NIGHTWATCH® account by tapping the (+) button and selecting “Add New Device.”
- 4 **ACTIVATE** your device by scanning or manually entering the Activation Code and Serial # (within original packaging).
- 5 **CONNECT** your activated device to a local WiFi network by following the User Guide Instructions (link available in App).

+ Add New Device



WiFi Setup



Assign Device to HORSE

- 6 **ADD** a new horse to your NIGHTWATCH® account by tapping the (+) button and selecting “Add New Horse” and follow on-screen wizard to complete horse profile.
- 7 **ASSIGN** a device to a horse by selecting “Assign Device” and choose from drop-down menu of available devices by Serial #.
NOTE: If you do not see any devices, return to step 3 to add a new device.

+ Add New Horse




Assign Device



* The NIGHTWATCH® mobile App requires iOS 12 or higher and Android 11.0 or higher.



Connecting Your Device

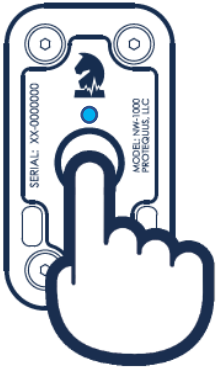

STEP 1: Temporarily place device in broadcast mode

- Confirm your device is OFF.
- Press and HOLD power button ~10 secs (release when you see **blue** LED).
- Proceed to step 2 when you see **blue** LED flashing. This may take several mins.

STEP 2: Connect device to a nearby smartphone or computer

- Open WiFi settings on your smartphone or computer.
- Select your device by serial # among list of available WiFi networks.
- Enter “nightwatch” as password, when prompted.
- Confirm smartphone or computer is successfully connected to device.

NOTE: Ensure your device is within range of your desired WiFi network and you have that network’s password before proceeding.

STEP 3: Connect device to a WiFi network via your smartphone or computer

- Open a web browser and enter **connect.smarthalter.com** or **192.168.44.1** to launch WiFi menu of options.
- Select “Setup WiFi,” identify a WiFi network, and enter that network’s password, when prompted.
- Confirm device is successfully connected to a WiFi network.

STEP 4: Restart device

- Power device OFF then ON to exit broadcast mode.




Scan QR Code to access step-by-step guide to connecting your device to WiFi.



Fitting Your Device

Your NIGHTWATCH® device requires a proper fit*.

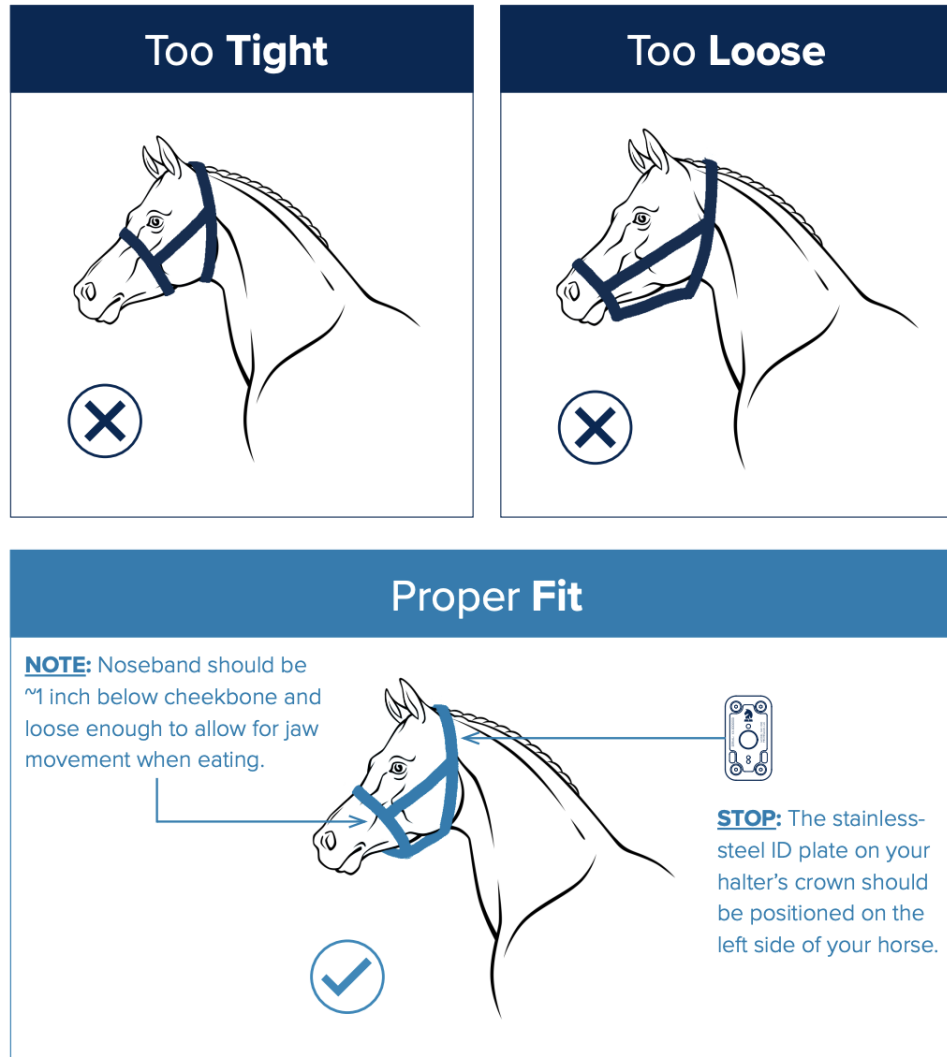

* An ill-fitting device may detach or result in skin irritation, inaccurate or inconsistent results, and/or damage to your device.

Status LED Definitions

Your NIGHTWATCH® device will communicate a wealth of information via the status LED.

HORSE Status	
 1 Blink (every 10 secs)	Smart alerts enabled ($EDI^{\circ} \leq 4.0$) or Manual alerts enabled (threshold not breached)
 1 Blink (every 10 secs)	Smart alerts enabled ($4.0 < EDI^{\circ} \leq 7.0$)
 1 Blink (every 10 secs) Solid	Smart alerts enabled ($EDI^{\circ} > 7.0$) Lockout Mode (alert issued, device needs to be reset)
DEVICE Status	
 Solid Blinking 1 Blink (every 10 secs)* 3 Blinks (every 10 secs)	Powering ON / OFF, Error, or Updating of Firmware Start Up / Initialization Standby Mode Alerts disabled
 Solid Blinking 3 Blinks (every 10 secs)	Broadcast Mode - Initialization Broadcast Mode - Connect to WiFi via a wireless device Broadcast Mode - Connect to WiFi via mobile App
 Blinking Solid	On Charger - Charging [†] On Charger - Fully Charged
 No illumination	Powered OFF (0% Battery) or Sleep Mode

* Device will remain in Standby Mode for 5 mins when first powered ON and/or removed from charger.

 [†] LED will blink rapidly if device battery is critically low.



Need support? We're here to help.

Customer Care
800-757-3856 (+512-515-1095)
M-F 8:30 AM - 5:30 PM CST
support@protequus.com

© 2022 Protequus®. All Rights Reserved. Patent-Protected Technology.
All Trademarks and logos herein are owned by Protequus®.

Offered exclusively by:



PROTEQUUS®
Equine Health & Safety