

LOSRECAL

LOSRECAL
Far Beyond Printing

LOSRECAL

Logistics Label Printer

USER GUIDE



Version 1.0.0



Contents

1.0.	Product Introduction		1
2.0.	Quick Printer Installation		1
3.0.	Label Setup		2
4.0.	Driver Installation		3
5.0.	Windows Driver Installation		3
6.0.	Mac Driver Installation		5
7.0.	“FEED” Button Instruction		7
8.0.	LED Status		7
9.0.	Platform(Online Store) Setup		8
10.0.	FAQ		9
11.0.	Support		10
12.0.	Specifications		11


1.0. Product Introduction

What's in the box?



① Printer ② Power Adapter ③ Power Cable ④ USB Cable
⑤ Labels ⑥ User Manual ⑦ Card ⑧ USB Flash Drive


2.0. Quick Printer Installation

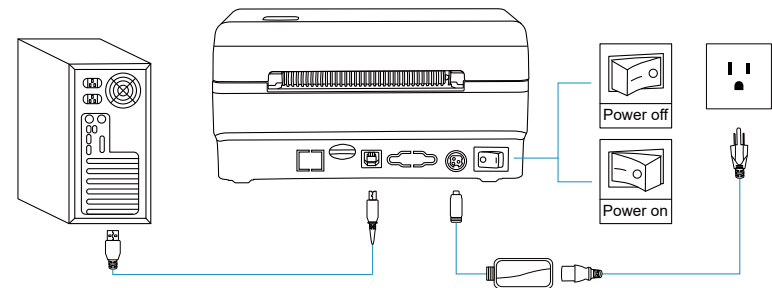

Note: Please use the power adapter provided by LOSRECAL.

3.0. Label Setup

1. Facing the front of the printer, press the cover open button to open the top cover.
2. Install the label paper with the holders on both sides.
3. Finish the label paper installation, and then close the cover.
4. For new label paper, do the label size calibration again.

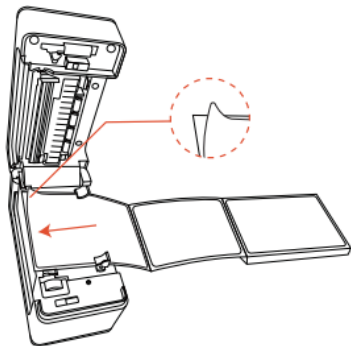

Note: Before using the printer to print labels, please calibrate the paper size.

Label size calibration:

1. Load at least 4 consecutive sheets of label into the printer.
2. Press FEED button and hold on.
3. Release the button when you hear one “beep” sound.
4. Then, the printer will calibrate the label size.

4.0. Driver Installation

Support downloading driver files via download link.

Printer driver download link: <https://bit.ly/128driver>

Warning

The print head (TPH) will be extremely hot after printing.
Do not touch it or any parts around it.

5.0. Windows Driver Installation


Note: Please connect to the computer first and then turn on the printer.

1. Open the driver file you downloaded.

The download link: <https://bit.ly/128wind>

2. Follow the instruction to install the driver.



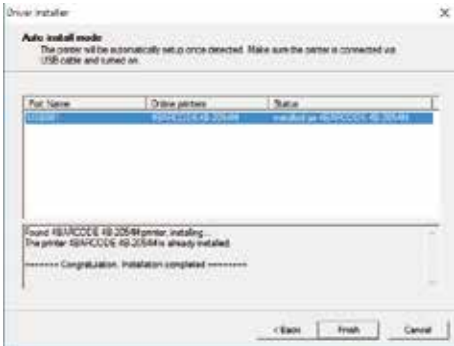

3. Check the printer Page Setup (4 in×6 in) in Printing preferences.



Note: If the USB interface cannot be recognized during the installation process, please restart the printer.

6.0. Mac Driver Installation

Note: Please connect to the computer first and then turn on the printer.

1. Open the driver software you downloaded.


The download link: <https://bit.ly/128macd>



2. Start installation.



3. Follow the guideline to install until "The installation was successful" appears.

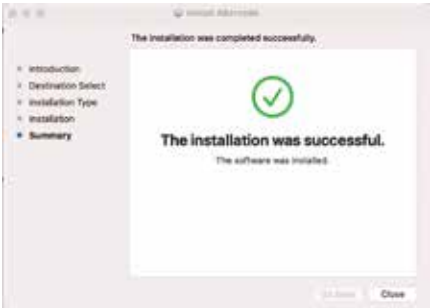

4. Page Setup, choose 4x6" (100x150 mm), then we can open the document and select the printer to print shipping labels.



7.0. "FEED" Button Instruction

Printer status	Operation of FEED	Function
Standby	Short press the button(light)	Feed in a blank paper
Standby	Long press the button(light) untill beep once	Automatically calibrate paper size
Standby	Long press the button(light) untill beep twice	Print out Self-test page
Standby	Long press the button(light) untill beep three times	Reset printer

8.0. LED Status

Description	LED indicator
Power on, waiting for printing instructions	Blue light
The printer is downloading data or paused	Blue light flashing
The printer is clearing data	Purple light
The cover is open	Red light
Printing errors, such as: out of paper, paper jam, or memory error, etc.	Red light flashing

9.0. Platform(Online Store) Setup

1. Shopify, <https://bit.ly/128-shopify>
2. UPS, <https://bit.ly/128-ups1>
3. Etsy, <https://bit.ly/128-etsy-1>
4. Amazon, <https://bit.ly/128-amazon>
5. eBay, <https://bit.ly/128-ebay>
6. PayPal, <https://bit.ly/128-paypal-1>
7. Pirate Ship, <https://bit.ly/128pirateship>
8. Poshmark, <https://bit.ly/128poshmark>
9. Stamps, <https://bit.ly/128stamps>
10. Shipeasy, <https://bit.ly/128shippingeasy>
11. FedEx, <https://bit.ly/128-fedex-1>
12. USPS, <https://bit.ly/128-usps1>
13. Endica, <https://bit.ly/128-endica>
14. XPS, <https://bit.ly/128xps-1>
15. DHL, <https://bit.ly/128dhl1>
16. Canada Post, <https://bit.ly/128-canadapost1>
17. Royal Mail, <https://bit.ly/128-royalmail-1>

10.0. FAQ

- Q1: What should I do when the printer flashes red?
- A1: When the red light on the top of the printer turns on, please power off the printer then on. Then the red light will change to blue, please follow the steps below to calibrate:
1. Load at least 4 consecutive sheets of label into the printer.
 2. When the loaded labels stop moving, press the FEED button(blue light) and hold it until you hear one 'beep'sound, then release the button.
 3. It will spit out two blank labels, and the gap between labels will stop on the printer's edge.
- Q2: When the printing is too faint, how to adjust the density and printing speed?
- A2: For Windows : Printer Preferences → Page Setup → Seting;
For Mac OS: Can be set in drop-down menu under 'Printer Features'
- Q3: What can I do if paper is jammed or there are white spots in my print?
- A3: Turn off the printer, and allow the printer head to cool down. Use the pad with alcohol to wipe the printer head clean.
- Q4: Why I am printing blank labels?
- A4: Make sure your labels are 'Direct Thermal' labels and the label that you peel off should be facing the ceiling when it comes out of the printer.
- Q5: How can we print the label that is not in standard 4*6 size , such as the USPS?
- A5: You can use the "Adobe Reader" to take a screenshot and print the label in correct size.
Adobe Reader download link: <https://get.adobe.com/cn/reader/>
The tutorial video: <https://bit.ly/128-adobe>



Q6: How to print self-test label?
A6: The self-test label can be used to determine whether the machine is malfunctioning and whether the printing performance is good.
You can print self-test label as follows.
1. Turn on the printer.
2. Press FEED button and hold on.
3. Release the button when you hear two'Beep' sound.

FAQ download link : <https://bit.ly/128faq>

11.0. Support

Need Tech Support, contact us by:



support@losrecal.com



+86 18218184794



Monday to Friday, 24 hours.

12.0. Specifications

Method	Direct Thermal
Resolution	203 DPI
Max Printing Speed	152mm/s
Paper Width	108mm
Paper Thickness	0.06-0.25mm
Power Adapter	24V/2.5A
Printing Life	TPH 30 Km
Connection	USB