



Before operating the lamp, please read this manual carefully and keep it for future reference.


mAntra

LED CEILING LAMP (infrared remote control and dimmable type) Operating Instructions

ITEM NO.:5955

LED 60W 4200lm 3000-6500K


220-240V~50/60Hz

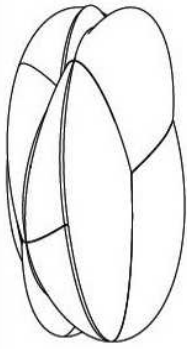

USER MANUAL

- 1) Rated voltage 220V-240V, frequency 50Hz, do not exceed this voltage
- 2) Do not install at bathroom, outdoor or any moistured place.
- 3) This is non-prevent water lamp, if install irrelevantly, will cause electrical shock, not light
- 4) To avoid fire, do not put the high temperature or materials under the lamp for long time
- 5) To avoid fire, do not use lamp with exceed voltage long time
- 6) To avoid failure, do not connect with other dimmer or switch with dimmable function
- 7) Please shut the power supply if there are any anomaly, and contact the qualified personnel
- 8) To ensure safety, must connect ground wire when connecting power supply

1. Fix base to ceiling

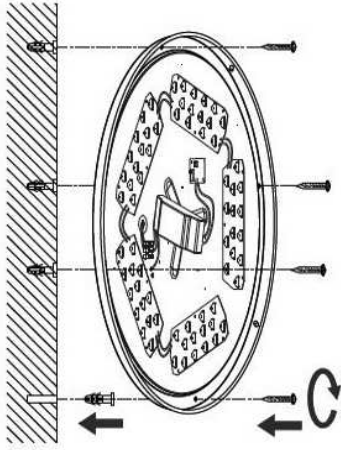


2. Connect cables

Suitable wire type:


Solid wire: $\phi 1.3-\phi 1.78\text{mm}$

Twisted wire: $1.0\text{mm}^2-4\text{mm}^2$

Wire 10mm



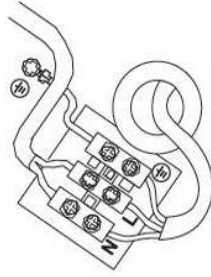


3. Assemble the cover of lighting: match the lamp's 3 clips of the cover with the lamp body holes, turn the lamp cover clockwise until it firmly fasten. Refer the following drawing

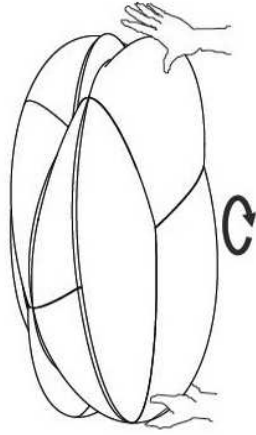


4. Operating manual for infrared remote control: put on 2pcs AAA 1.5V

batteries, then ensure that remote control and ceiling are operating the same channel(CH1-CH2). The same remote control can operate with all the ceiling with the same channel, within 5 meters max.

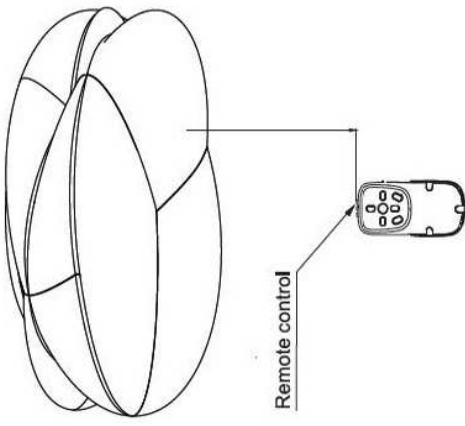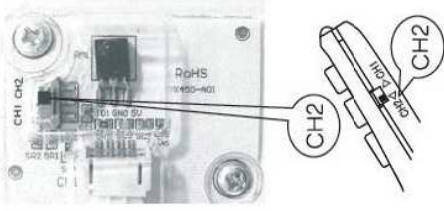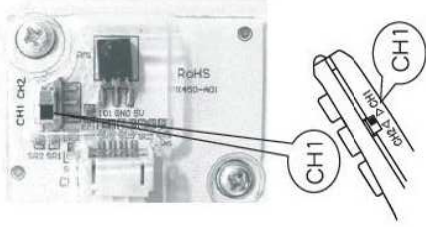

Remote controller functions:

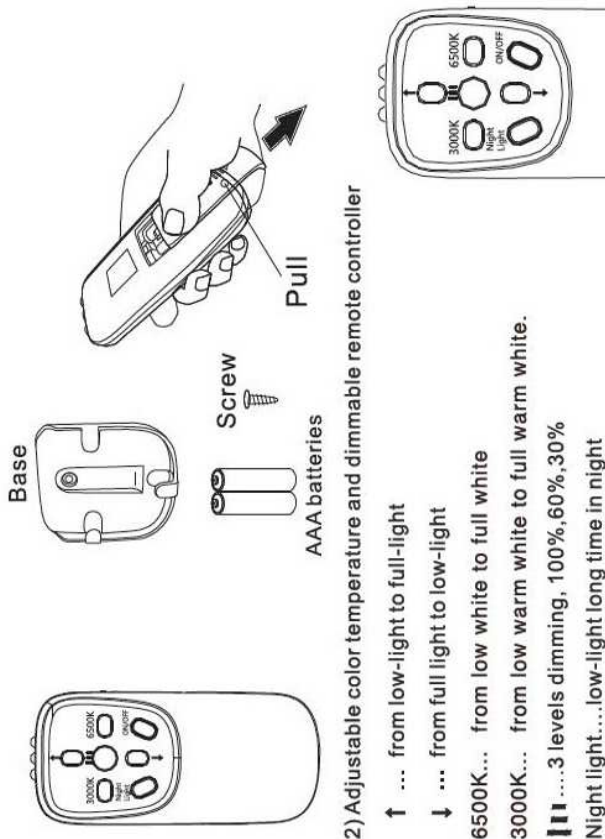

2) Adjustable color temperature and dimmable remote controller

↑ ... from low-light to full-light

↓ ... from full light to low-light

6500K... from low white to full white

3000K... from low warm white to full warm white.

||| ...3 levels dimming, 100%, 60%, 30%

Night light....low-light long time in night

On/off.....switch on, switch off, memory function, can memorize the latest switch off lamp condition