



FK-918

Assembly Instruction



E-mail: Felix.King703@gmail.com



Instructions for Use



Up and down adjustment Tilt adjustment Backrest adjustment

Thanks for purchasing our products. Please read this manual before assembly.
And please assemble in order. After the assembly, keep the instruction properly.
Make sure all the parts are concluded (12 kinds in total).

Accessories List

(1) Backrest	(2) Seat Cushion	(3) Foot Stool	(4) 5 Castors	(5) Air Rod
(6) 2 Armrests	(7) Base Plate	(8) 4 Screws (M6X30mm)	(9) 4 Screws (M6X35mm)	(10) 4 Screws (M6X18mm)
(11) Hexagon Wrench	(12) 4 Decoration Caps			

Notice

- This is a single chair, so please do not seat 2 or more persons, just seat only one person.
- Do not stand on the chair.
- Do not sit reverse or sit outside of the seat cushion.
- Check the screws once every 6 months, to make sure the screws are tight. Do not use the chair when the screws are loose.
- Please assemble according to the instructions.


Assembly Instruction

Please assemble in a wide and flat place.

Step 1

Insert Castors (4) into Foot Stool (3). There are 5 Castors (4) need to be inserted.


* Caution: Confirm the Castors (4) must be inserted into the innermost. Otherwise the casters could easily fall out and the chair could fall down.

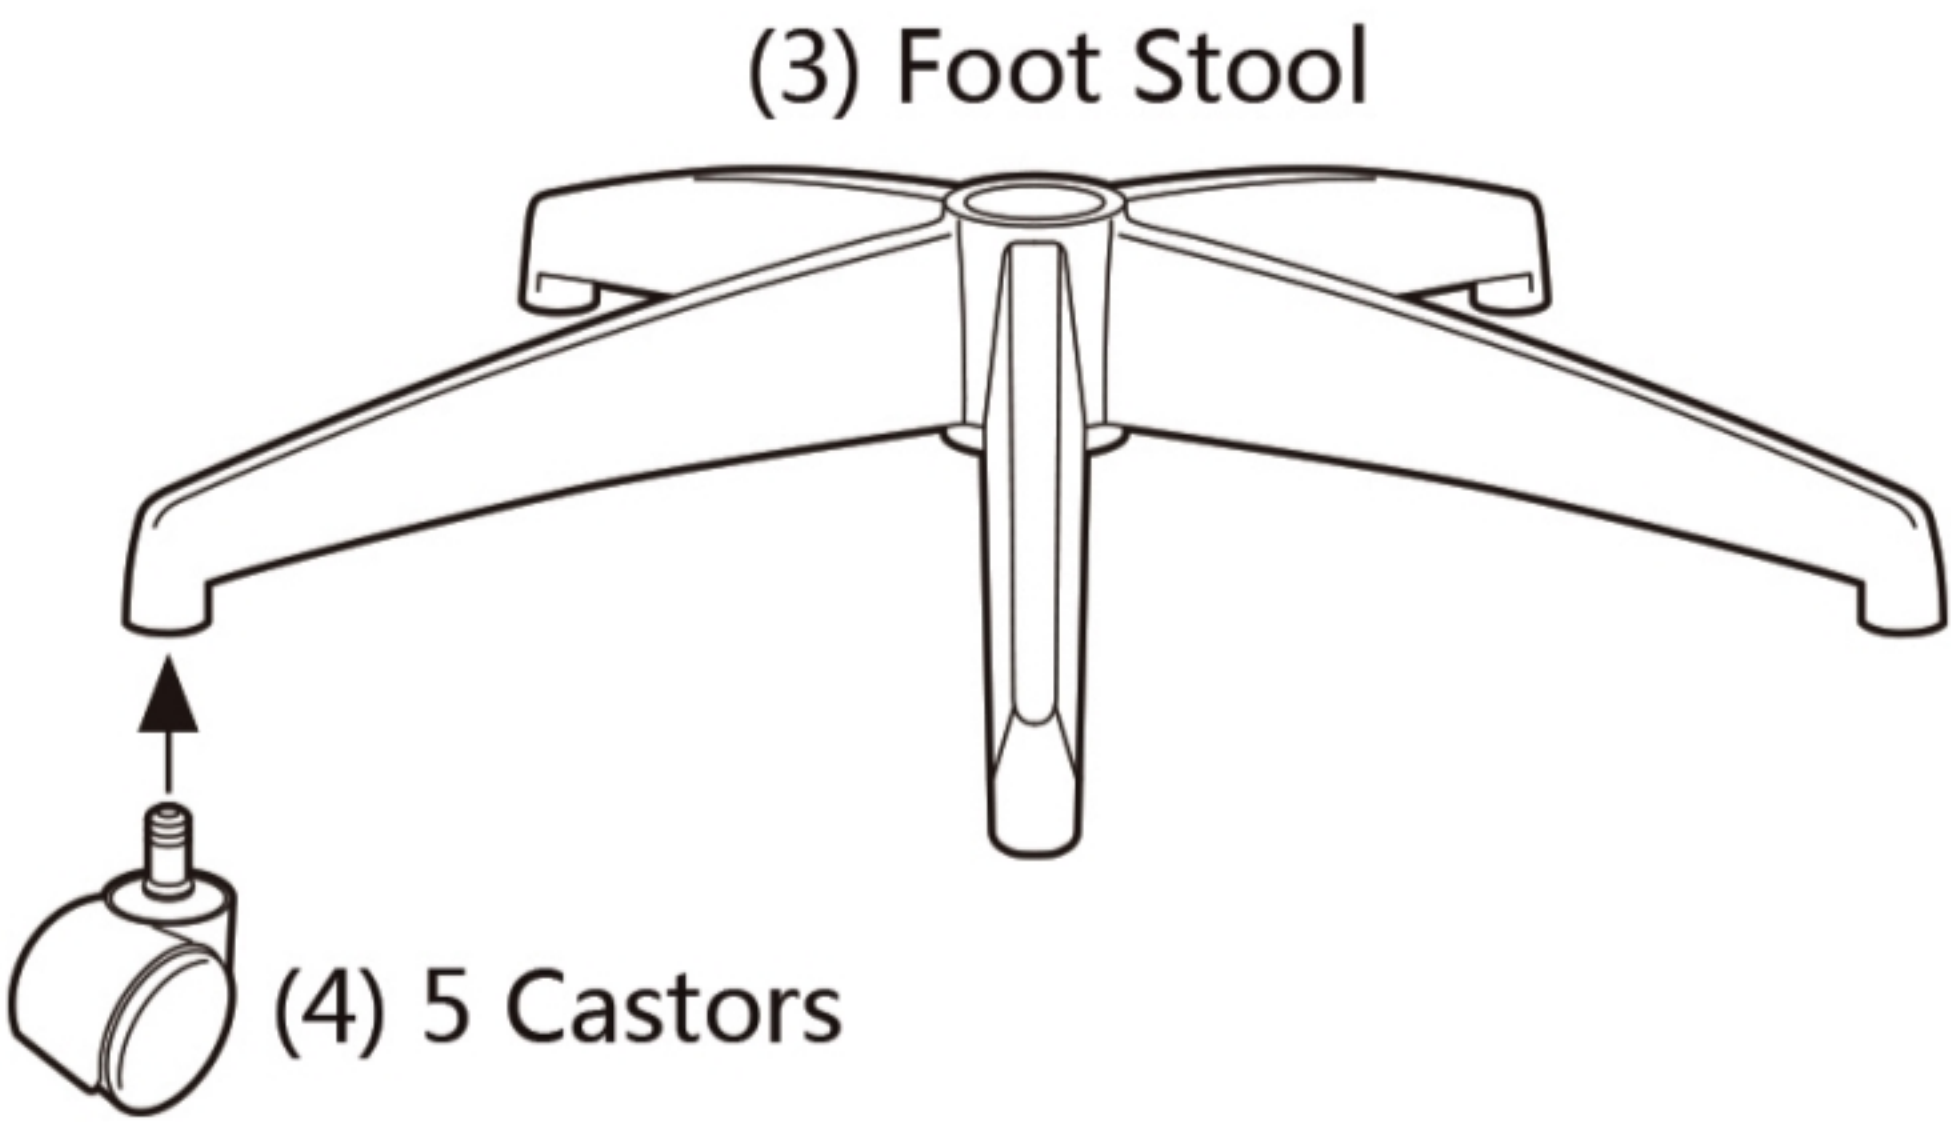

Step 2


Insert Air Rod (5) into the hole of Foot Stool (3). Put it aside and we'll use it in Step 6.

* Caution: Please insert Air Rod (5) straightly, and then press Air Rod (5) firmly into Foot Stool (3).

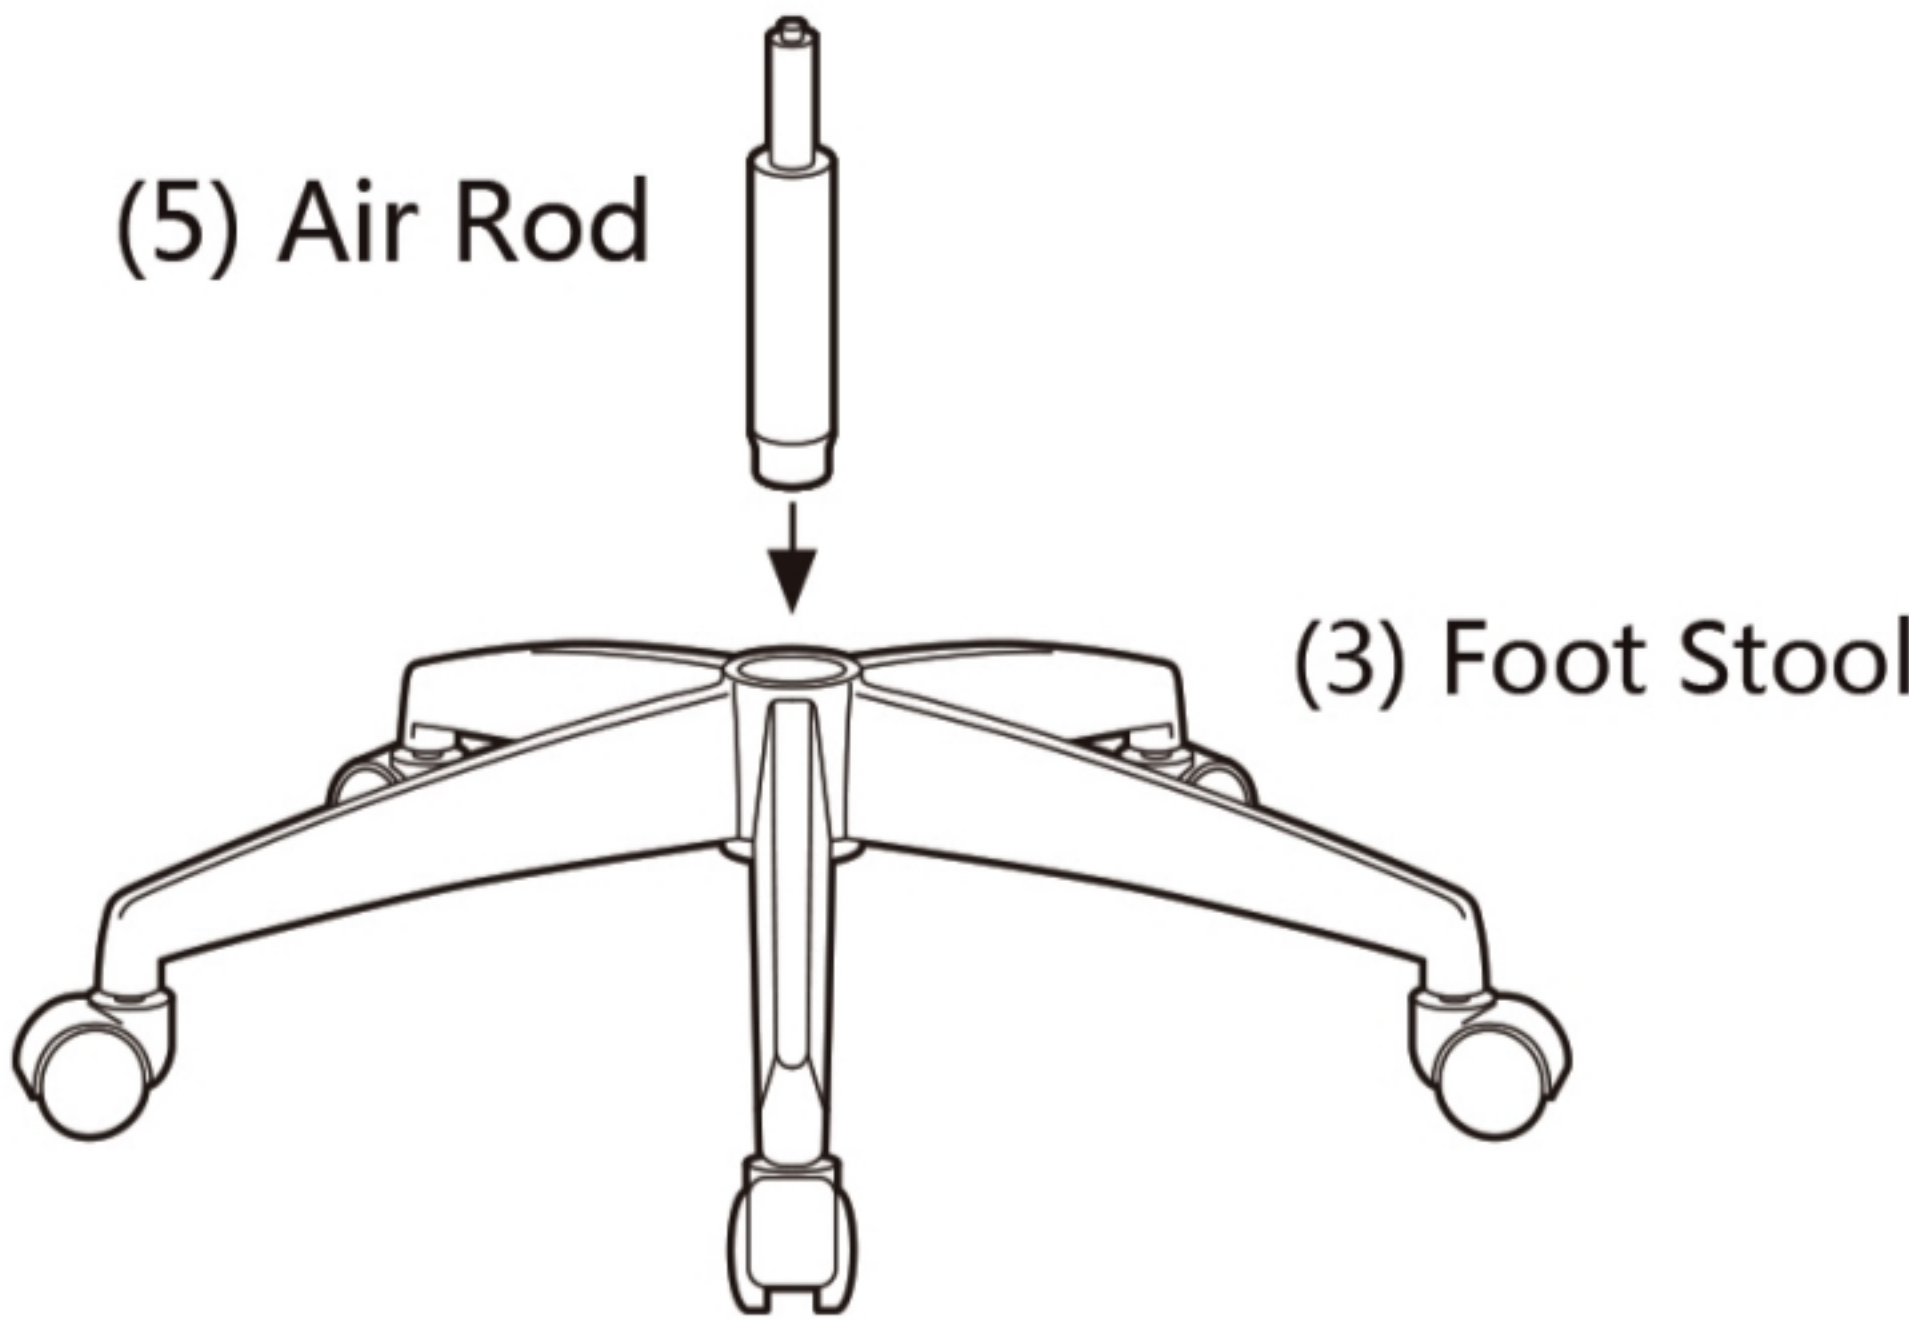


Step 3

Tighten the Screws M6X30mm (8) with Hexagon Wrench (11) to fix 2 Armrests(6) to the back of Backrest(1). Tighten the 4 screws firmly and then cover the screws with Decoration Caps (12).

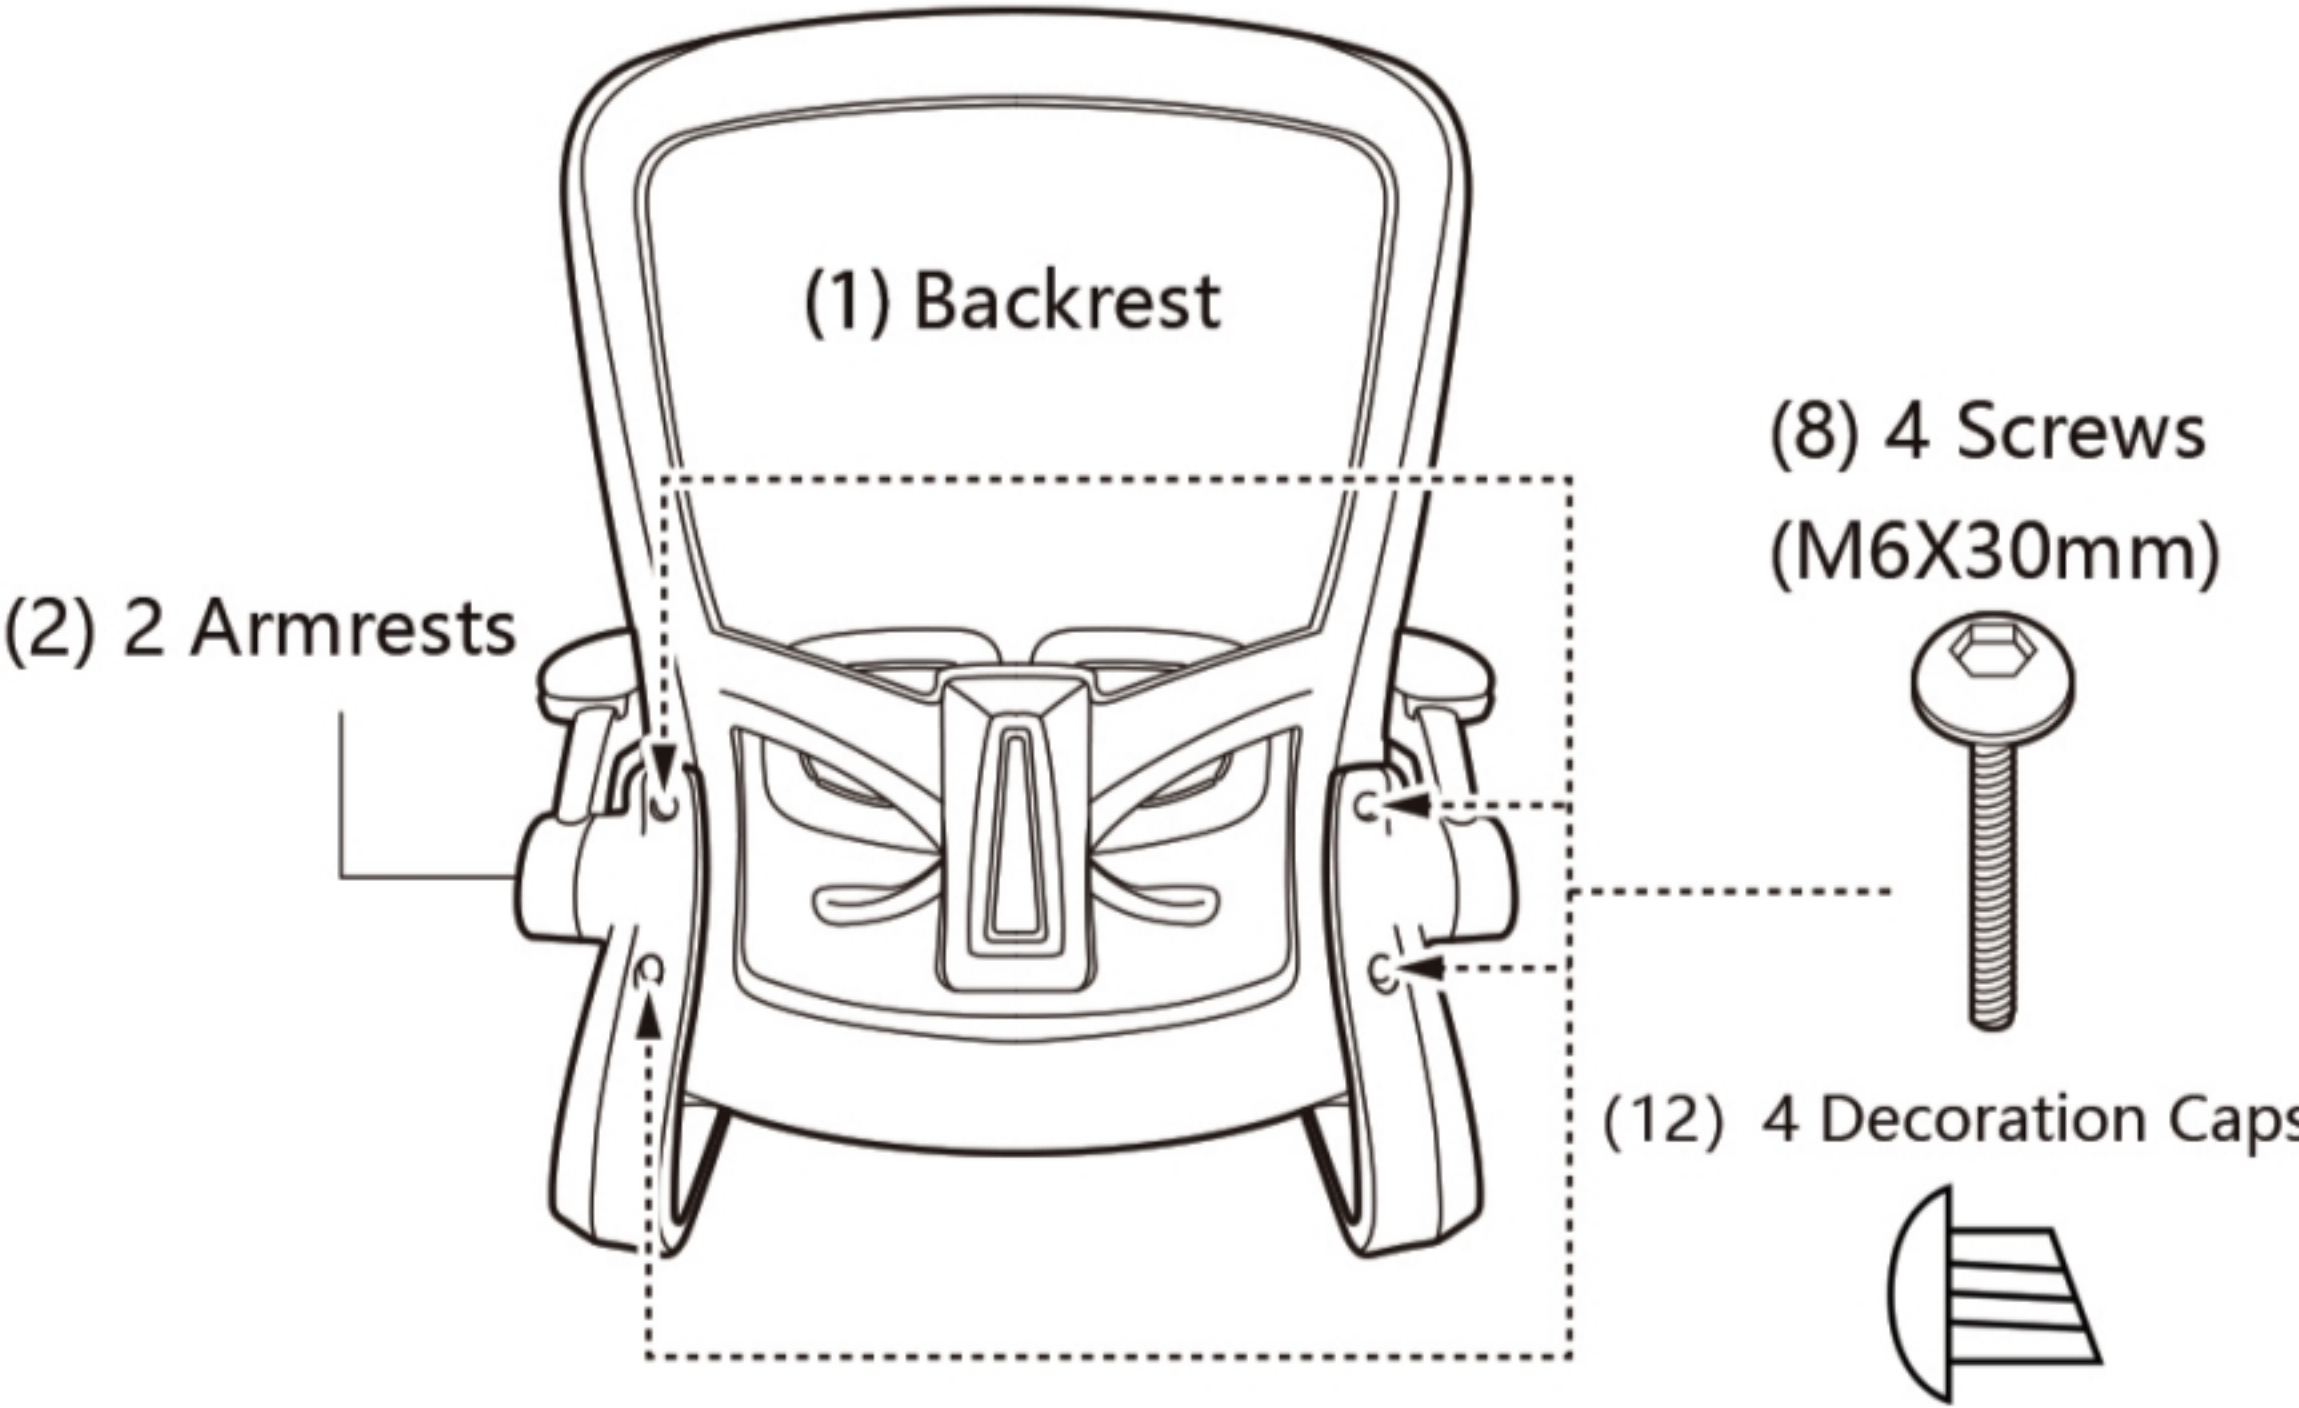

Step 4


After Step 3, fix the bottom of Armrests (6) to the back of Seat Cushion (2). Tighten the Screws M6X35mm (9) with Hexagon Wrench (11) firmly.

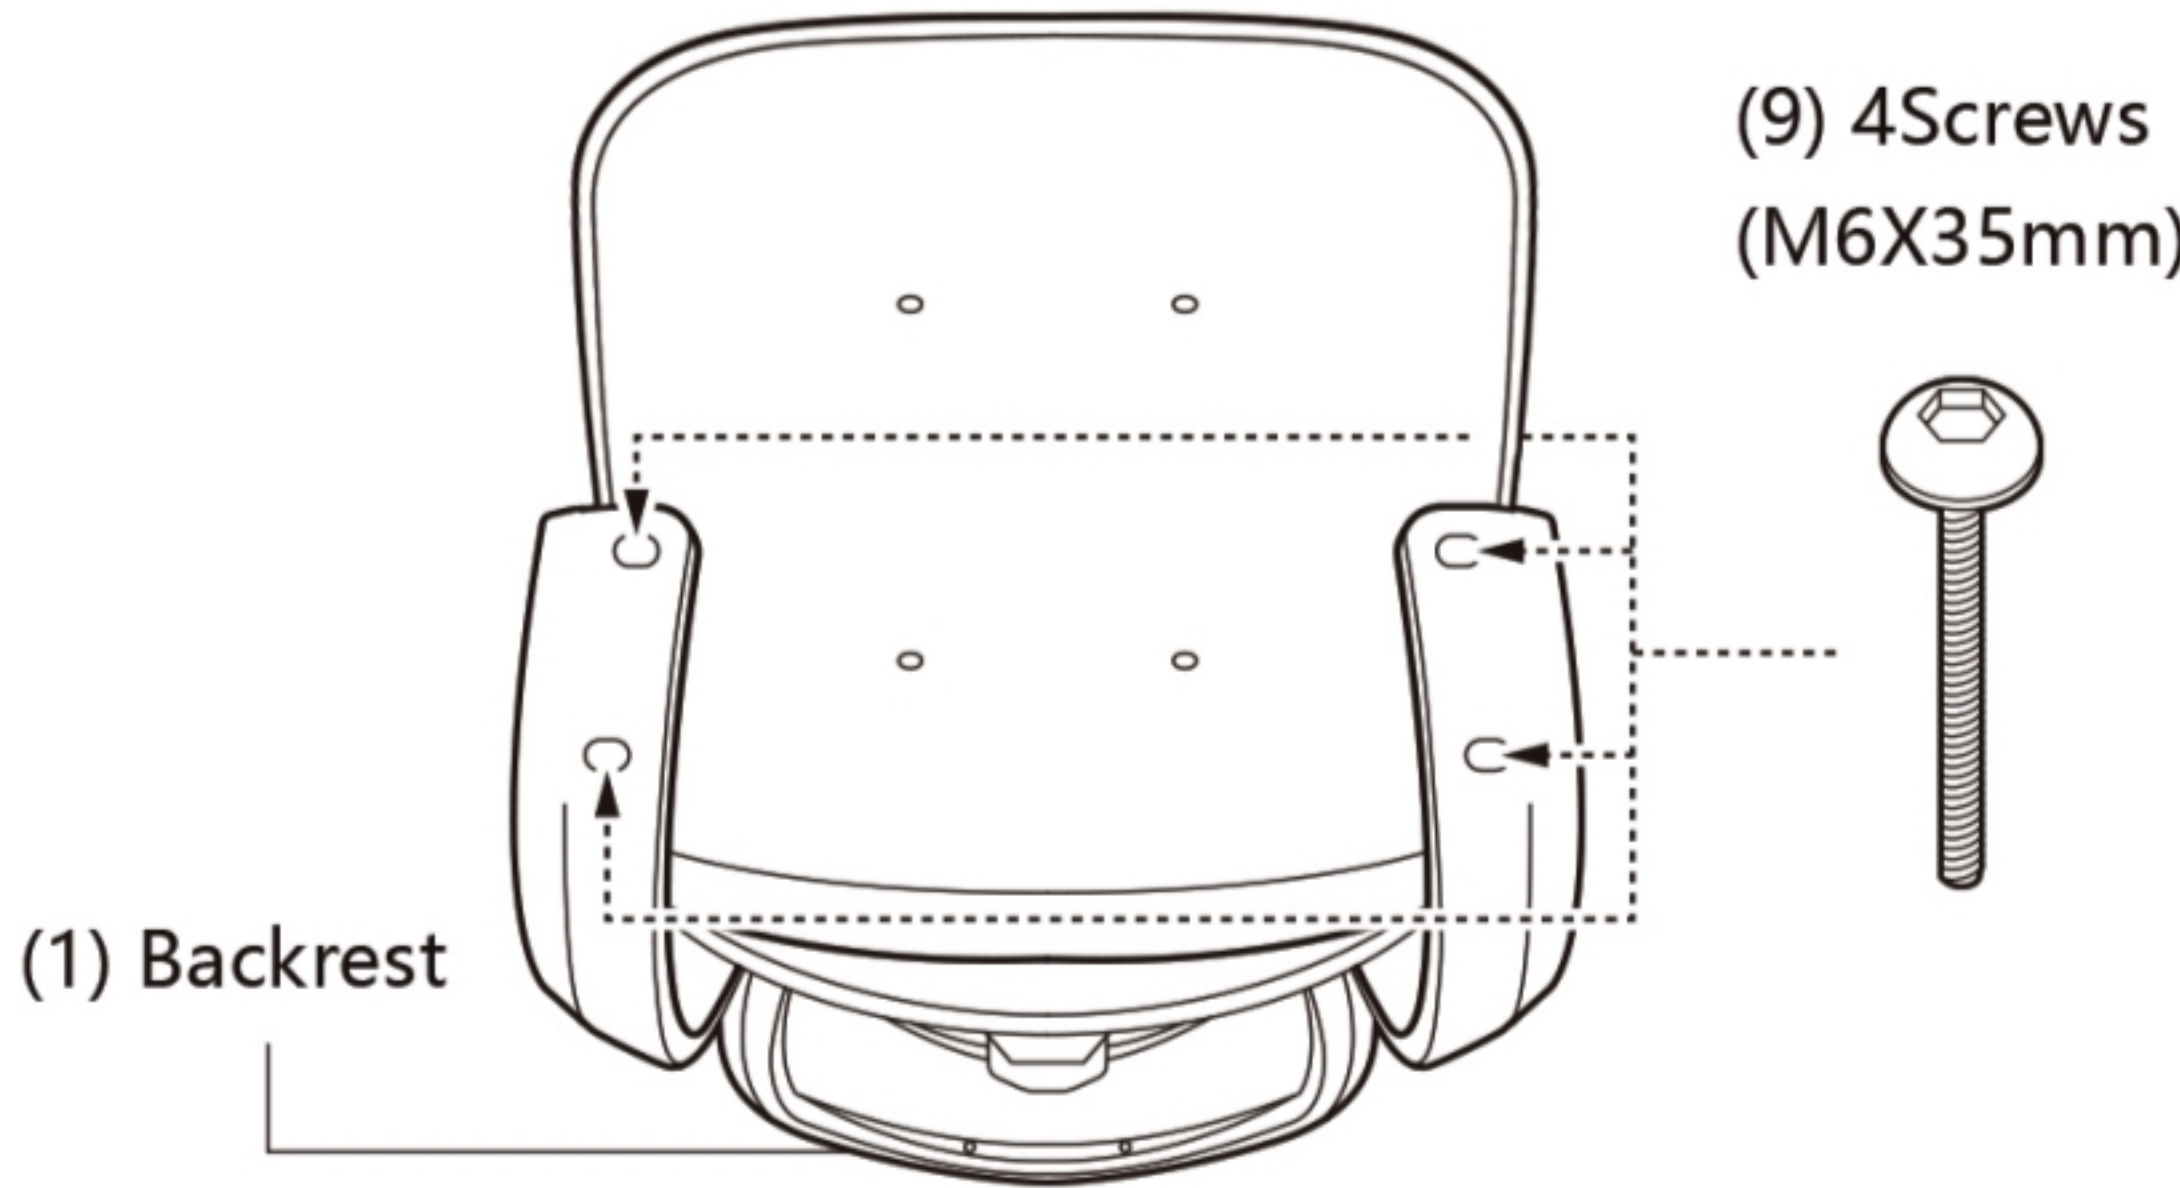

Step 5

Fix Base Plate (7) to the bottom of Seat Cushion (2). Tighten the Screws M6X18mm (10) with Hexagon Wrench (11) firmly.

Caution: There is a FRONT letter print on the front of the Base Plate

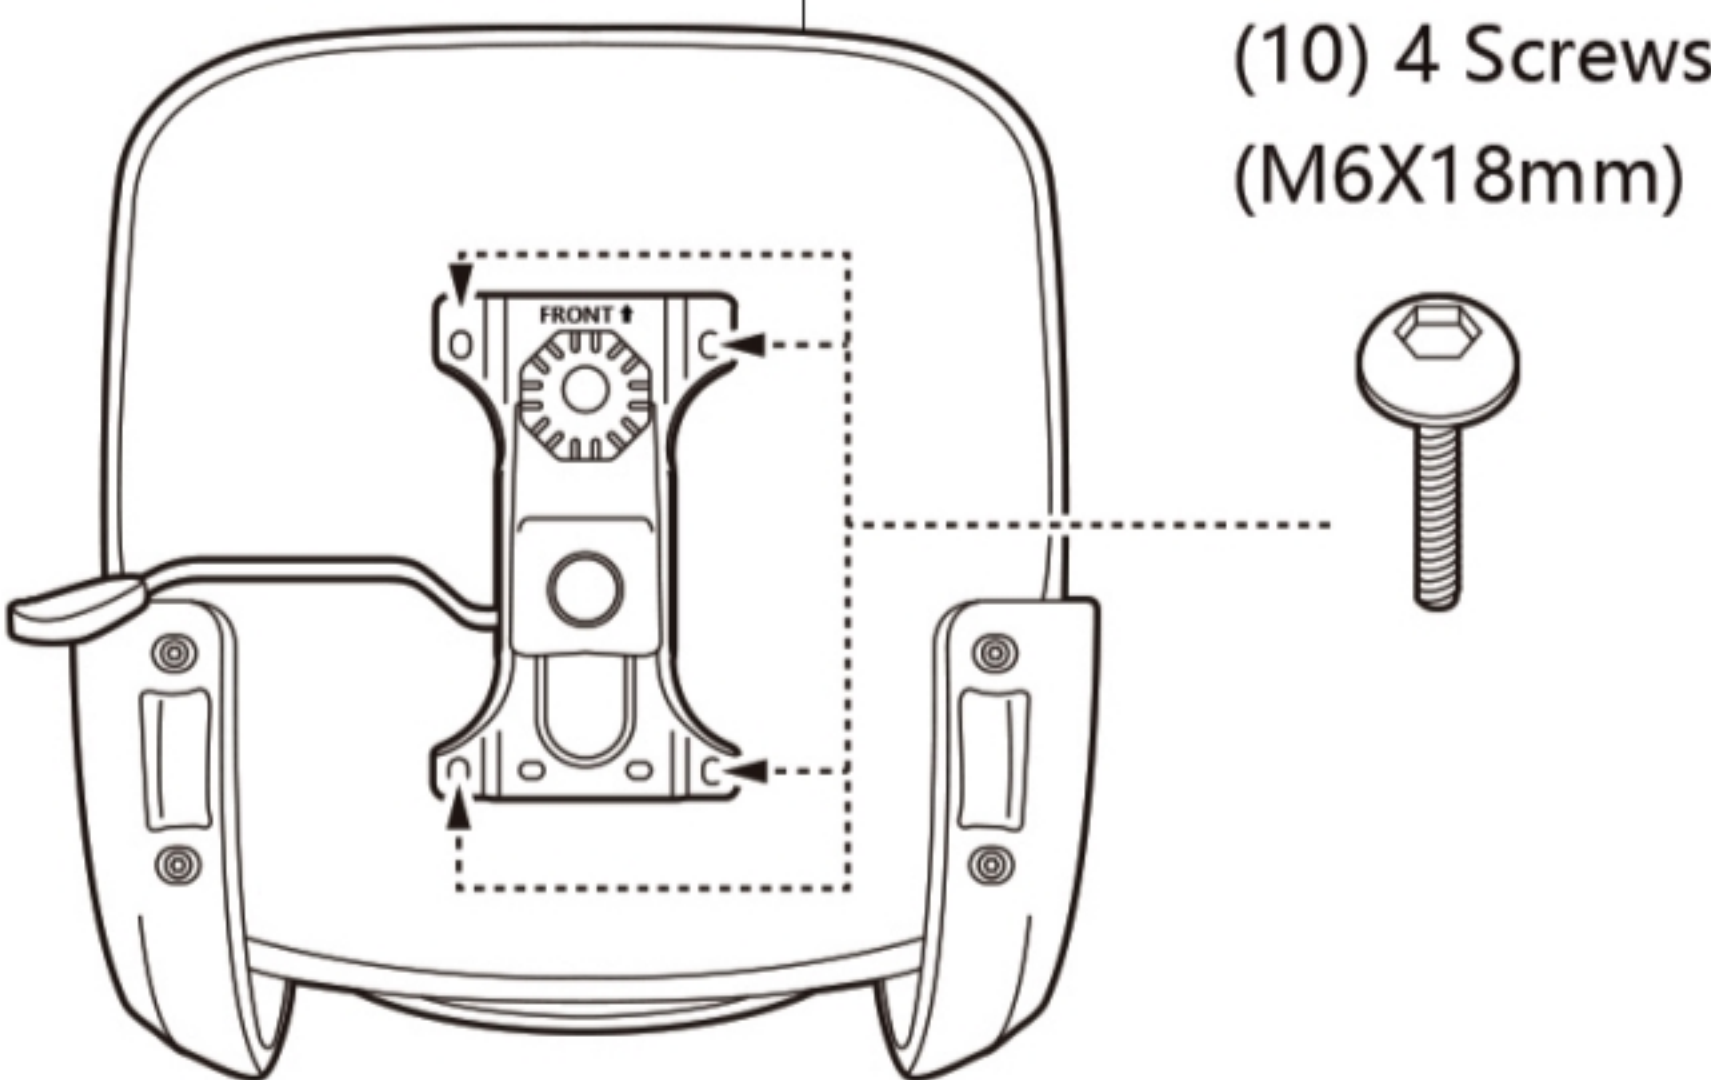

Step 6

Pick up the Step 2's Air Rod (5) and Foot Stool (3). Insert the Air Rod (5) into Step 5's Base Plate (7). There's a hole in the middle of Base Plate (7). Press the Seat Cushion (2) from top to bottom, use your whole body's strength to insert it firmly, the assembly is complete now.



* Caution: If the Air Rod (5) doesn't insert to Base Plate (7) firmly, it's likely to fall down when the chair

Guarantee

After purchasing our product, a customer service is supplied for you. If the product is defective or something is wrong, please contact us via email **felixking01@outlook.com**. We will give you a refund or replacement if that happens.