




24 Channel H.265 Hybrid DVR for HD-TVI / HDCVI / AHD / CVBS / IP with Alarm / Sensor

KEY FEATURES

- Supports cameras up to 8MP (4K)
- H.265 compression
- 24 channels (16 analog + 8 IP)
- Up to 2 SATA drives
- Audio Inputs / Outputs
- Alarm terminals

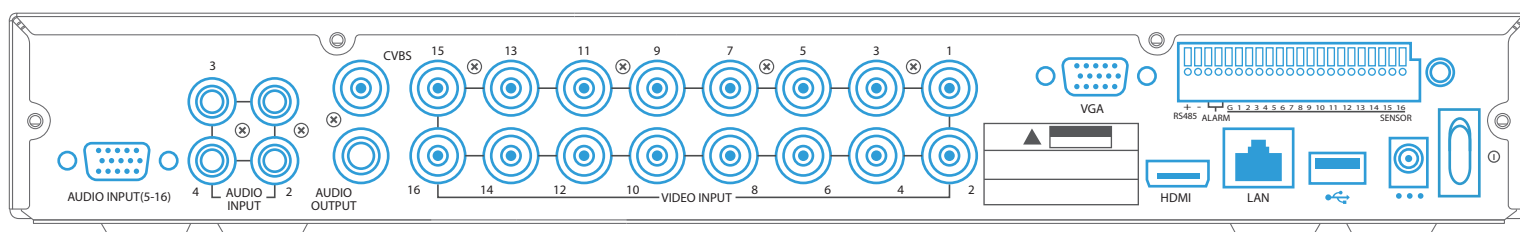

SPECIFICATIONS

Video Compression	H.265 / H.264
Video System	NTSC / PAL
Operating System	Linux (embedded)
Analog Video (I/O)	16CH inputs / VGA and HDMI output

Display Resolution	Analog:
	8MP (15fps) 5MP (20fps) 4MP / 3MP / 1080p / 720p / 960H (30fps)
	IP:
	4MP / 3MP / 1080p / 720p

US & Canada

+1-909-598-3718
pimfg.com
customerservice@pimfg.com
techsupport@pimfg.com

USA

PI Manufacturing
20732 Currier Road
Walnut, CA 91789



PI MANUFACTURING

Powered by Infinite Solutions

Since 1986



CONTINUED

Display Features	1/4/6/8/9/10/13/14/16/S.E.Q.
------------------	------------------------------

Recording Resolution	Analog: 8MP (7fps) 5MP (10fps) 4MP (15fps) 3MP (17fps) 1080p (30fps) 720p (30fps) 960H (30fps) IP: 4MP (30fps) 3MP (30fps) 1080p (30fps) 720p (30fps)
----------------------	---

IP Recording Bandwidth	64Mbps
------------------------	--------

Maximum Output Bandwidth	128Mbps
--------------------------	---------

Maximum Decode Performance	8MP (56fps - Max 8CH playback) 5MP (160fps - Max 16CH playback) 4MP (240fps) 3MP (270fps) 2.1MP (480fps)
----------------------------	--

Recording Speed	Continuous / Manual / Motion Detection
-----------------	--

Synchronous Playback	16CH
----------------------	------

US & Canada

+1-909-598-3718

pimfg.com

customerservice@pimfg.com

techsupport@pimfg.com

USAPI Manufacturing
20732 Currier Road
Walnut, CA 91789**PI MANUFACTURING**

Powered by Infinite Solutions

Since 1986



CONTINUED

Network Type	LAN, DHCP, DDNS
HDD Interface	2 SATA HDDs
Multiplex Operation	Live display, record, playback, backup and network
USB	1 x USB 3.0, 1 x USB 2.0 (For mouse and backup / upgrade)
Sensor & Alarm	16 inputs / 1 output
PTZ Control	Yes (RS485)
Mobile App	iOS / Android
VGA / HDMI	1024x768, 1280x720, 1280x1024, 1440x900, 1920x1080, 1680x1050, 1600x1200, 1900x1200, 2560x1440, 3840x2160
Power Supply	DC 12V / 5A
Dimensions (W x D x H)	14.88" x 13.39" x 1.97" (378x340x50mm)
Working Temperature	-10°C~+55°C (14°F - 131°F)
Working Humidity	10%~90%

US & Canada

+1-909-598-3718

pimfg.com

customerservice@pimfg.com

techsupport@pimfg.com

USAPI Manufacturing
20732 Currier Road
Walnut, CA 91789**PI MANUFACTURING**

Powered by Infinite Solutions

Since 1986

