


PowerbankModel:WT-01


User Manual

Thanks for choosing WT-01 power bank model  
This model compatible with most DC 5V devices



Product presentation

1.This item consists of two USB ports, one Type-C port and one Micro port. a wireless charger, digital display, four lights



2.Power indicator: this item has a digital display screen, which is convenient to show the power.Press the button to display the current state of power.



3. Floodlight mode: long press the button for 3 seconds, 4 lights on; Click the button and the four lights will be slightly on. Then click the button again will be SOS mode;Click the button again, flash mode; Long press 3 seconds to turn off 4 lights.


4. Click the button to open the wireless charge, and the green wireless charge indicator light will always be on. If no device is on the wireless charge after 35 seconds, the wireless charge function will be off, and the green wireless charge indicator light will be off, the wireless charging power fault indicator light will show red.

Charge mobile phone devices

1. Support quick charging of QC and charging your devices quickly
2. Support wireless charging 10W output.
3. Support pass through function
4. Support charging of most DC5V mobile phones and devices.
5. Choose different cables according to different phones and devices.

Charge Power Bank

1. Support USB-C and Micro Ports to recharge the power bank, Also support Solar panel recharging. The max power of solar panel is 5.5V/ 0.3A(as shown in Figure 2/3/4)

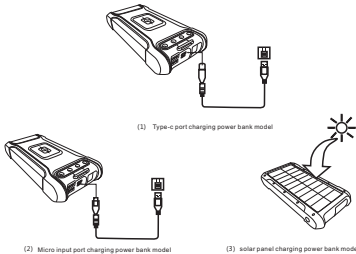

2. Different chargers take different time to charge the mobile power supply. if using fast charger can be as fast as 5 hours to fully charged the power bank

Attentions

1. Cause the capacity is high of this model, use fast charger to full charge it need only 5 hours. but subject to the actual use.
2. If this model doesn't work, Please check the devices connected or not, Confirm you chose the right cable or not. Suggest using original adapter and cable accessories.
3. As the power bank has conversion rate, so the battery capacity is not the real capacity you can use.
4. Support most mobile phone model.
5. At least every half year, make a full charging circulation.

Storage and working temperature

**Storage and working temperature**(Please use it during the normal temperature in order to protect the battery life )

**Storage temperature**:-5~ +35℃ (Less than one month) -5 ~+30℃ (Less than 6 months)

**Working temperature**: Charging 0~+45℃ . discharging -20~+60℃

safety instructions

Warning: If don't follow safety instructions, maybe cause a fire, some breakdown or other damages



made form high quality Lithium battery cells and cores. Please rest assured of this.

1. Don't separate this model by yourself. Don't put product into high temperature or fire
2. Do not approach flammable items
3. Do not hit with hard objects
4. If find there is bulge, Please stop using
5. Children don't touch

Specification

Battery type: Li-polymer battery  
Capacity: 20000mAh  
solar panel input: DC5.5V/0.3A  
Micro input: DC5V/2A 9V/2A  
USB-C input: DC5V/3A 9V/2A  
USB output1: DC5V/3A  
USB output2: DC5V/3A 9V/2A 12V/1.5A  
USB-C output: DC5V/3A 9V/2A 12V/1.5A  
Wireless charge: 10W  
Size: 176\*86.4\*28.7mm  
Weight: 530g  
Color: Black Red Blue Orange

Accessories

Power bank  
A-C cable  
Manual

