

User Manual

Dual Mode (BT + 2.4GHz) Keyboard and Mouse Comb




Compatible System

Compatible with Windows XP /11 /10 /8 /7


Note: Please read the use manual carefully before you start using this product.

Bluetooth Pairing Instructions



How to connect the keyboard via bluetooth?

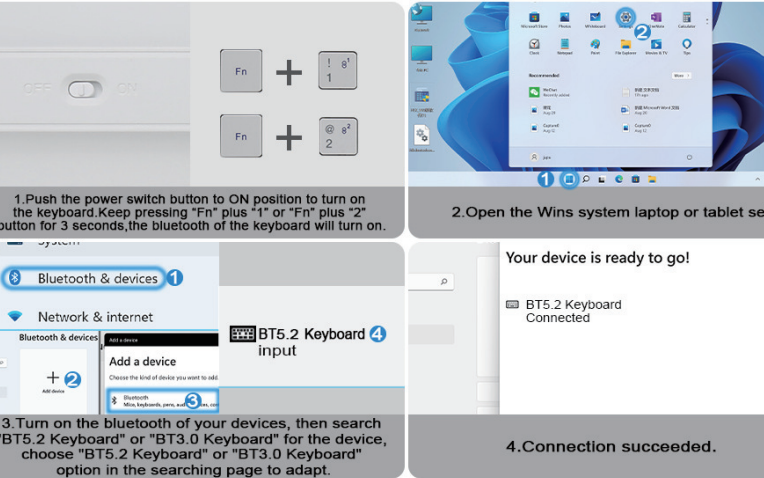


Mouse Connection Instructions

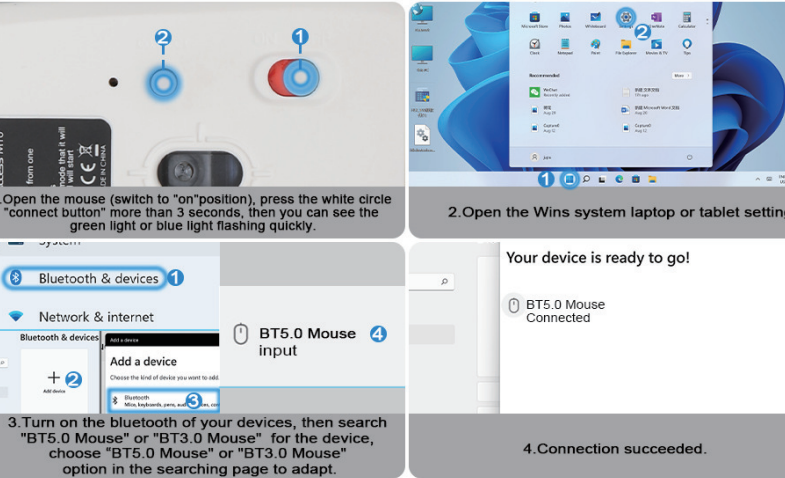

2.4G Pairing Instructions



2.4G Mouse Use Manual



Two Connection Methods




If your computer or laptop is just with type-c port, you need to connect the supplied USB-C to USB adapter to your computer or laptop and plug the 2.4G receiver into it.



2.4G receiver for regular laptop, computer, and so on. 2.4GHz wireless transmission technology provides a powerful and reliable connection up to 33ft.

Keyboard Overview

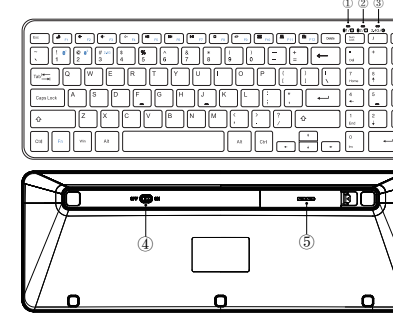

1. BT 1 indicator / CAPS lock indicator
2. BT 2 indicator / Num lock indicator
3. 2.4G indicator / Low voltage indicator
4. Power switch
5. Battery compartment

Indicator :

No.	Light	Keyboard Indicator	Status
①	B1/B	BT 1 indicator / CAPS lock indicator	Flashing green (bluetooth 1 pairing) / Enable or disable Caps lock
②	B2/B	BT 2 indicator / Num lock indicator	Flashing green (bluetooth 2 pairing) / Enable or disable Num key
③	2.4G/B	2.4G indicator / Low voltage indicator	Flashing red (2.4G pairing) / Flashing red when the battery is low
④		Power switch	ON / OFF switch
⑤		Battery compartment	Install 2 x AAA batteries

Multi-channel Connection

1. When connecting the first device, press "Fn + 1" (Bluetooth 1) and press 3 seconds to start the connection
2. When connecting the first device, press "Fn + 2" (Bluetooth 2) and press 3 seconds to start the connection
3. When connecting the first device, press "Fn + 3" (2.4G channel) and press 3 seconds to start the connection
4. To use multiple devices at the same time, press Fn+1/2/3 to switch to freely switch to connected devices.

Safety Caution

1. Keep the keyboard and mouse away from sharp objects.
2. Do not place heavy object on the keyboard and mouse.
3. Away from microwave items.
4. Do not force or distorted the keyboard and mouse.
5. Keep away from oil, chemical or other organic liquid, items.

Keys and Functions

Esc	Music Player	Volume-	Volume+	Mute
Previous Track	Next Track	Play/Pause	Stop	Browser
Email	My Computer	Print Screen SysRq	Delete	Num Lock

The FN key is used in combination with other keys to access special features.	Press Fn + this key to choose bluetooth channel 1.
Press Fn + this key to choose bluetooth channel 2.	Press Fn + this key to choose 2.4G channel.

Tips: If it fails to connect properly, it is recommended to turn off the bluetooth keyboard power supply, restart and connect again.


Power Management

Power Saving Mode

The keyboard will automatically go to sleep after 10 minutes of inactivity. Press any button and wait 3 seconds to activate it.

Replace batteries

Lift the battery compartment up and off the base. Replace the spent batteries with 2 new AAA batteries and reattach the compartment door. (Batteries are include)
Note: Make sure that the positive (+) and negative (-) terminals are on the correct sides.

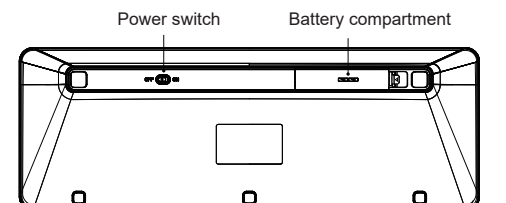

Power Saving Mode


The mouse will automatically go to sleep after 10 minutes of inactivity. Press the mouse scroll bar and wait 3 seconds to activate it.

Replace batteries

Lift the battery compartment up and off the base. Replace the spent batteries with 1 new AA battery and reattach the compartment door. (Battery is include)
Note: Make sure that the positive (+) and negative (-) terminals are on the correct sides.



Wireless Mouse

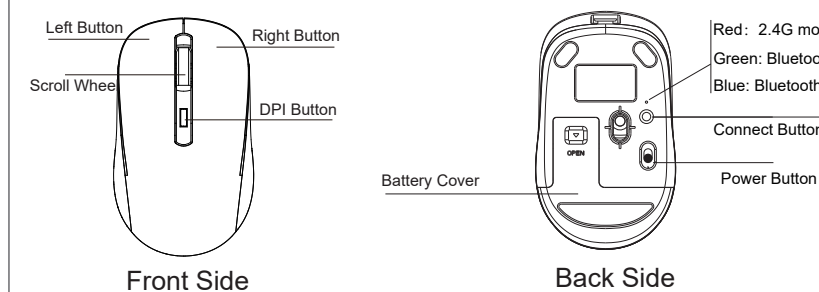

Mouse Specifications

Product Size	2.48*4.21*1.4 in	Working Distance	33 ft
Mouse Weight	0.14 lb(with USB Receiver)	Working Current	<10mA
Working Voltage	3V	Sleep Time	10 min
Sleep Current	0.02mA	Awaken Mouse	Press Key

Keyboard Specifications

working voltage	1.8-3.0V	Sleep Current	< 0.2mA
working current	≤3.0mA	Keycaps Lifetime	3 million
Awake Time	≤3 seconds	Connect Distance	≤33 ft
Buttons	95 keys	Working Temperature	-10 ℃ ~55 ℃

FAQ

Question	Answer
The LED indicator did not light up when the keyboard was turned on.	The keyboard battery is empty. Charge it according to the instructions in the "Charging" section.
The USB receiver does not recognize?	The USB receiver is not inserted into the tablet or computer. Please check if the USB interface is in good contact.
The smartphone computer or tablet did not find the keyboard.	Make sure you have pressed the "Connect" button. You should see a flashing LED. If the LED indicator not flashing, the keyboard will not be visible to your device.
Pairing failed. The keyboard isn't in the list of searched available wireless devices.	Turn off the keyboard and delete it from the search list on your device. Then start the search again and perform a new pairing.
The keys do not work after pairing.	Check the input setting of the device. Make sure that all the settings are ON. If not, change the setting.

Contact Us

1. If you have any use problems with our keyboard, please do not hesitate to contact us at aygrs1@outlook.com. Please rest assured that we will definitely help you solve them!
2. The device is provided with one-year limited hardware warranty from the purchase day.

Packing List

- 1* Wireless Keyboard (with 2 x AAA batteries)
- 1* Wireless Mouse (with USB receiver and 1 x AA battery)
- 1* Converter
- 1* Manual

120*160mm