

KTS Series

Package Content

Main Box

23"(FSG-KTS001) Track
21"(FSG-KTS002) Track

1 PCE

Tray 1 PCE

Articulating Arm
<DYNAMIC MODEL> 1 PCE

Parts Pack

#10-5/8" Pan head
Self tapping screw 8 PCS

Pre-screwed bumper 1 PCE

3M double-sided tape 2 PCS

Allen wrench 1 PCE

1



Please make sure everything is in the package before the installation.

Parts Pack

#10-5/8" Pan head
Self tapping screw 3 PCS

Track guard 1 PCE

2

Parts Pack

M5-0.8x17mm
Flat head screw 4 PCS

M5 Wrench 1 PCE

M5-0.8mm
Acron Nuts 4 PCS

3

Parts Pack

Cable clip 4 PCS

Mouse guard 1 PCE

Mouse pad 1 PCE

Accessories

F E R S G O

High Performance Keyboard Tray


KTS Series

DYNAMIC


Quick Installation Guide



Please check your desk before installation

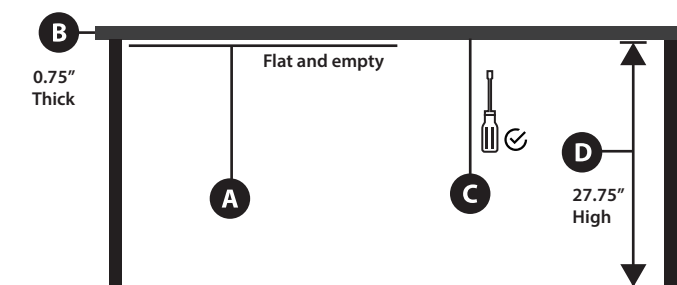

Front view

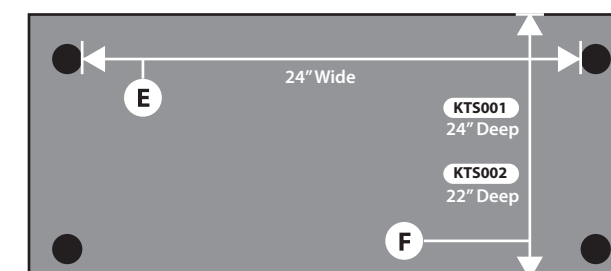

Bottom view

- A** The underside of my desktop is flat and free from any obstacles.
- B** My desktop is at least 0.75 " thick.
- C** My desktop can be driven with screws.
- D** My desk is at least 27.75" high from its underside to the floor.
- E** My desk is at least 24" wide between the legs.
- F** My desk is at least 24" deep (for **KTS001** model), or 22" deep (for **KTS002** model) from the front to its back side.

FERSGO

High Performance Keyboard Tray

KTS Series - DYNAMIC MODEL

Product designed and assembled in Taiwan.

Meet BIFMA x 5.5 Standard.

For home and office use only.

Please visit fersgo.com for more supports.

ANY QUESTIONS?

Please email us directly. We will answer in a day.




Customer_support@fersgo.com




STEP 1

Install the track

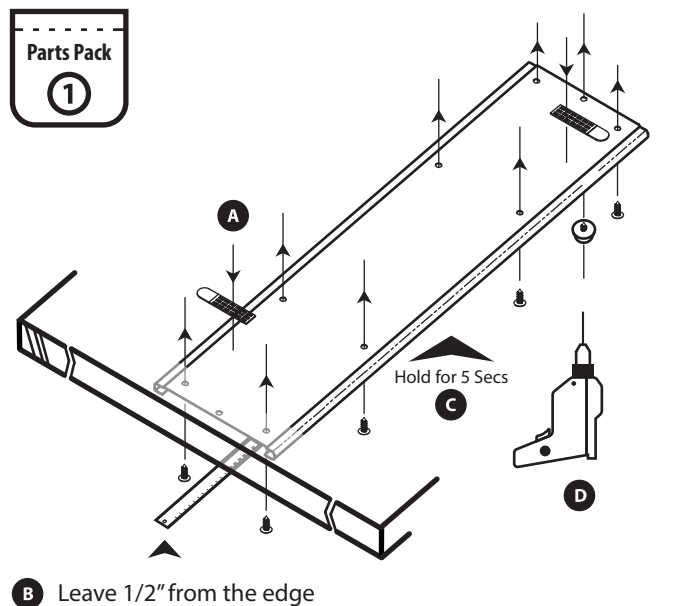


STEP 2

Install the track guard

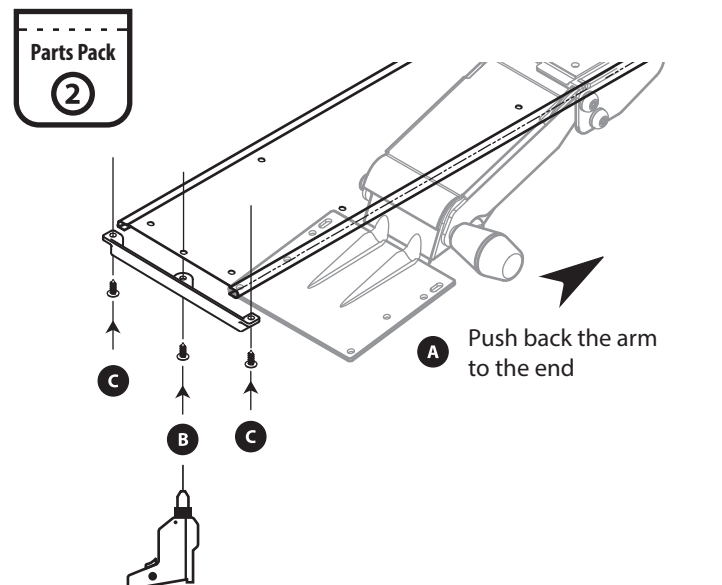

STEP 3

Install the tray

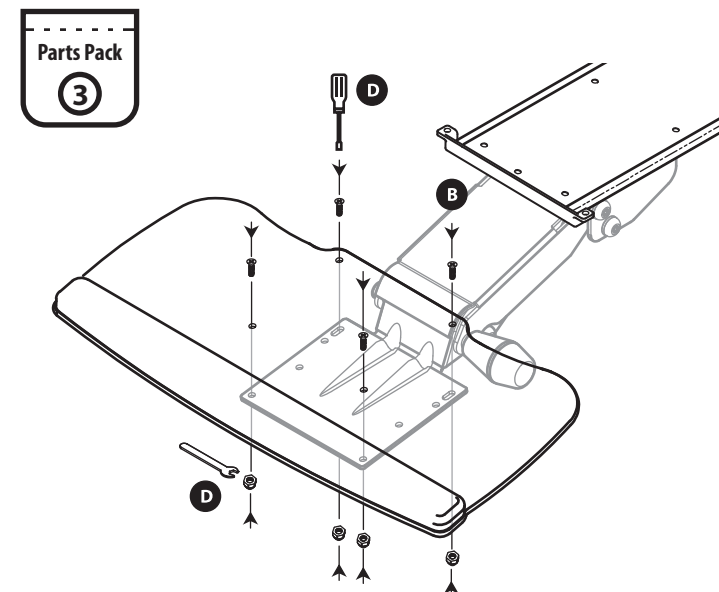

STEP 4


Install the accessories

Accessories Pack

This step is only for your reference. You may choose whether to install the accessories upon your own preference.


Mouse Guard

Insert it into the front edge of the mouse tray

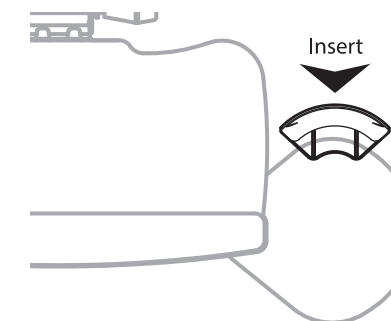


Cable Clips

Stick on the side of the tray assembly and the surface of the underside of the desk.

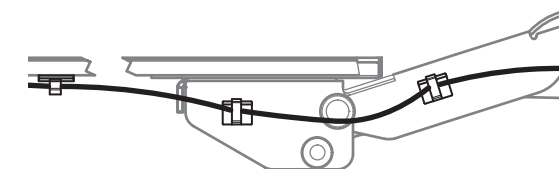

Adjustment

Mouse orientation

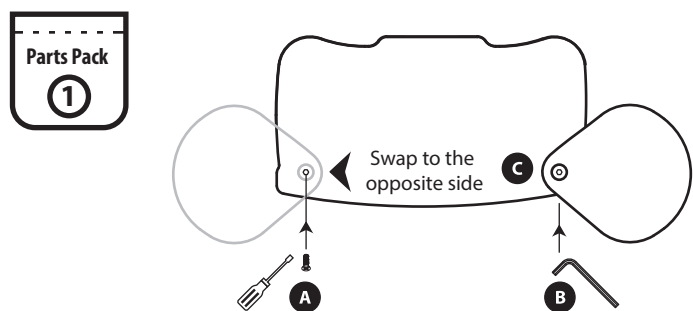


- A** Flip the tray and remove the screw at the opposite position.
- B** Use the allen wrench to remove the mouse tray.
- C** Swap their position and re-screw them until tightened.

! Please confirm the mouse orientation before installation work begins.

Adjustment

Keyboard height


DYNAMIC only

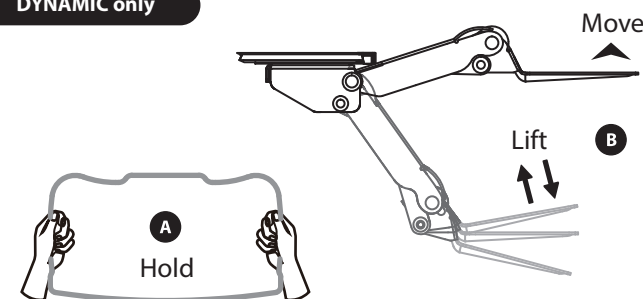

- A** Hold on to the both sides of the tray.
- B** Gently lift the tray up and move the entire arm assembly up or down to preferred position.

Adjustment


Tray tilting

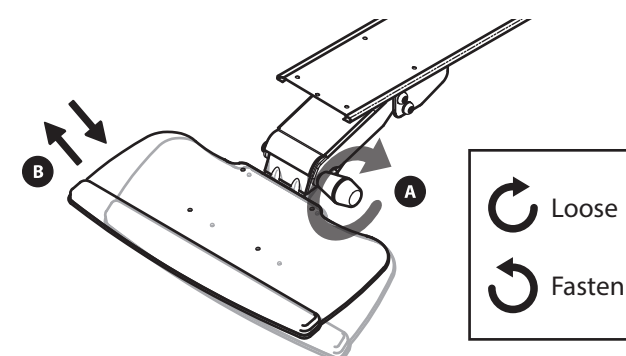

- A** Loose the knob handle.
- B** Hold on to the both sides of the tray and tilt it to the preferred angle.
- C** Fasten the knob handle.

Adjustment

Tray swivelling

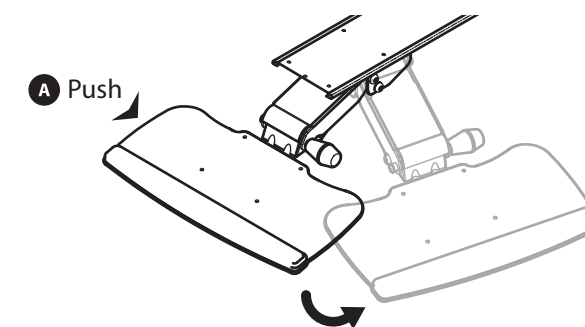

- A** Push the side of the tray assembly to its left or right direction.
- B** You can also hold on to the both side of the tray and move it to the left or right.