



60G Wireless HDMI Extender 1080P, 60G Frequency

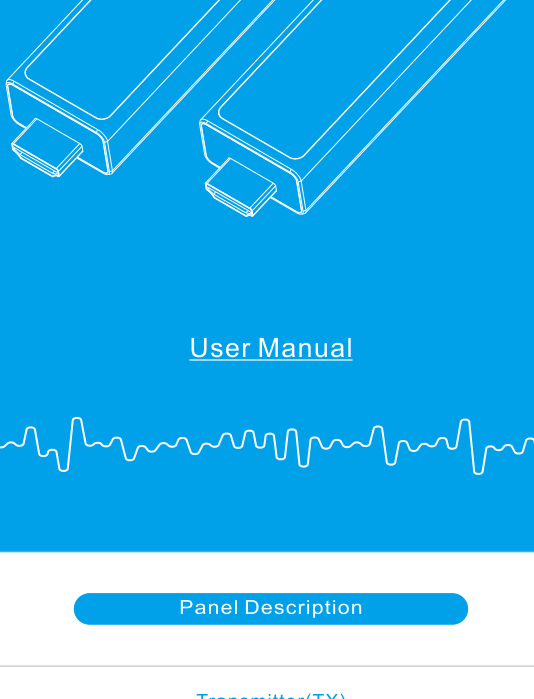


User Manual


Panel Description

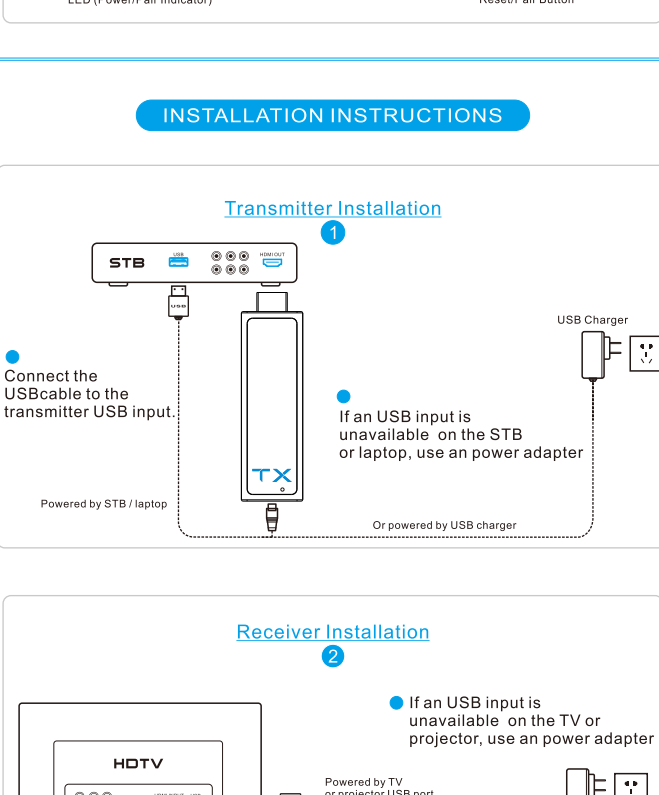


INSTALLATION INSTRUCTIONS

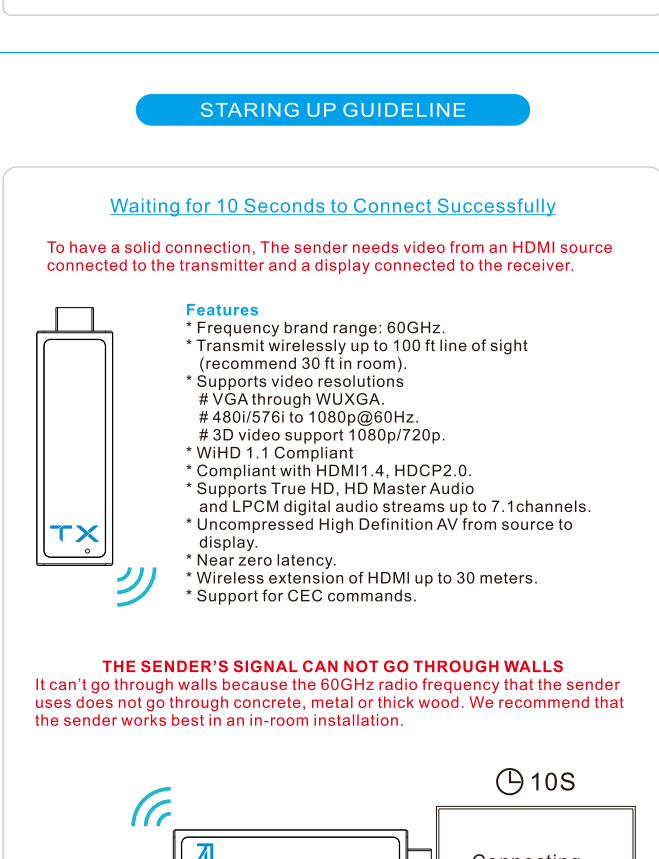

STARTING UP GUIDELINE

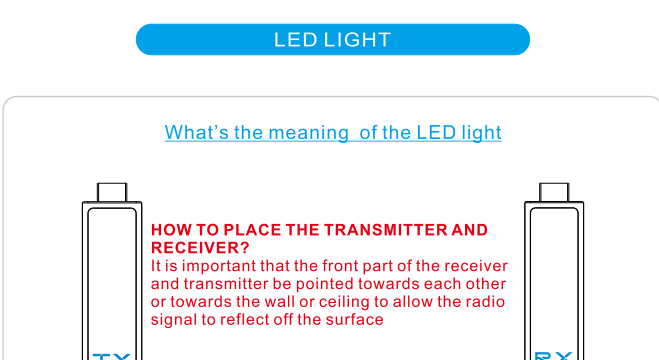

LED LIGHT

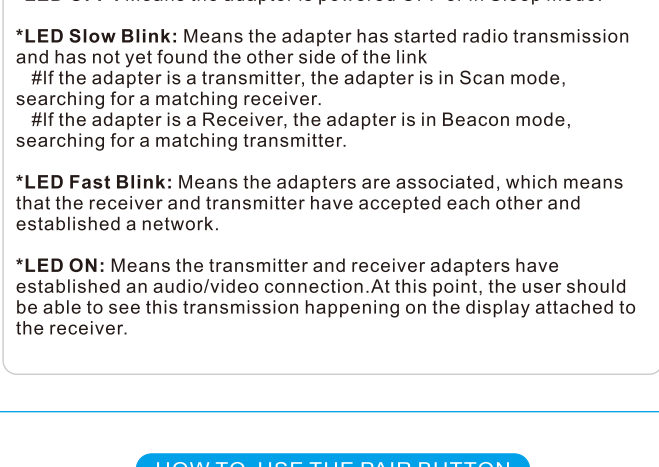

LED: The connection status indicating lamp. illuminates when power has been supplied to the unit.


***LED OFF :** Means the adapter is powered OFF or in Sleep mode.

***LED Slow Blink:** Means the adapter has started radio transmission and has not yet found the other side of the link
#If the adapter is a transmitter, the adapter is in Scan mode, searching for a matching receiver.
#If the adapter is a Receiver, the adapter is in Beacon mode, searching for a matching transmitter.

***LED Fast Blink:** Means the adapters are associated, which means that the receiver and transmitter have accepted each other and established a network.

***LED ON:** Means the transmitter and receiver adapters have established an audio/video connection. At this point, the user should be able to see this transmission happening on the display attached to the receiver.

HOW TO USE THE PAIR BUTTON

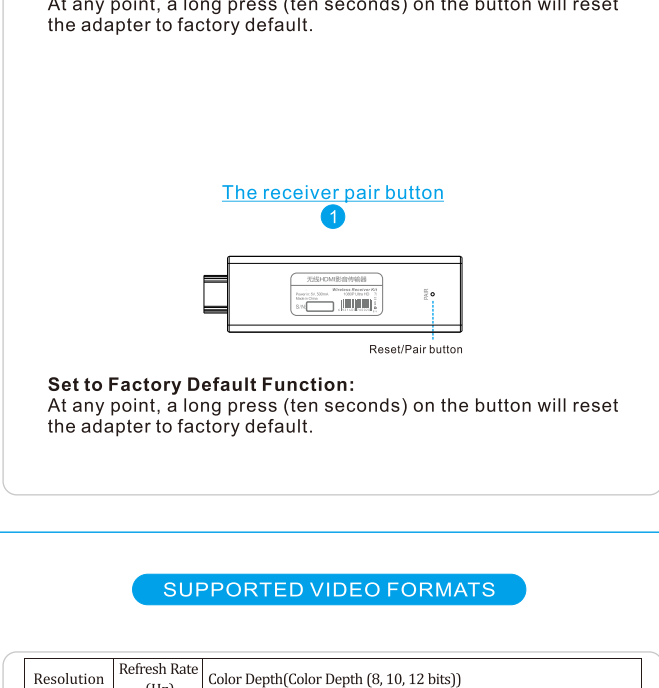

SUPPORTED VIDEO FORMATS

Resolution	Refresh Rate (Hz)	Color Depth(Color Depth (8, 10, 12 bits))
640 x 480p (VGA)	60	RGB 4:4:4 (8 bits)
848 x 480 (WVGA)	60	RGB 4:4:4 (8 bits)
800 x 600 (SVGA)	60	RGB 4:4:4 (8 bits)
1024 x 768 (XGA)	60	RGB 4:4:4 (8 bits)
1280 x 1024 (SXGA)	60	RGB 4:4:4 (8 bits)
1680 x 1050 (WSXGA+)	60	RGB 4:4:4 (8 bits)
1920 x 1200 (WUXGA)	60	RGB4:4:4 (8 bits)
480i	60	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2(8 bits)
480p	60	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2(8 bits)
576i	50	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2(8 bits)
576p	50	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2(8 bits)
720p	50/60	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2(8 bits)
1080i	50/60	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2(8 bits)
1080p	24/50/60	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2(8 bits)


SUPPORTED 3D FORMATS

Type	Resolution	Refresh Rate(Hz)
Frame Packing	1080p	24
	720p	50/60
Top - Bottom	1080p	24
	720p	50/60
Side-by-Side	1080i	50/60
	1080i	50/60


SUPPORTED AUDIO FORMATS

Format	Channel	Sampling Rates (KHz)
LPCM	2	32/44.1/48/88.2/96/176.4/192
LPCM	6/8	32/44.1/48/88.2/96
Dolby Digital	2/5.1	48
Dolby Digital Plus	2/5.1/6.1/7.1	48
Dolby TrueHD	5.1/6.1/7.1	48/96
DTS-HD Master Audio	5.1/6.1/7.1	48/96
DTS-HD Master Audio	2/5.1	192


FAQ

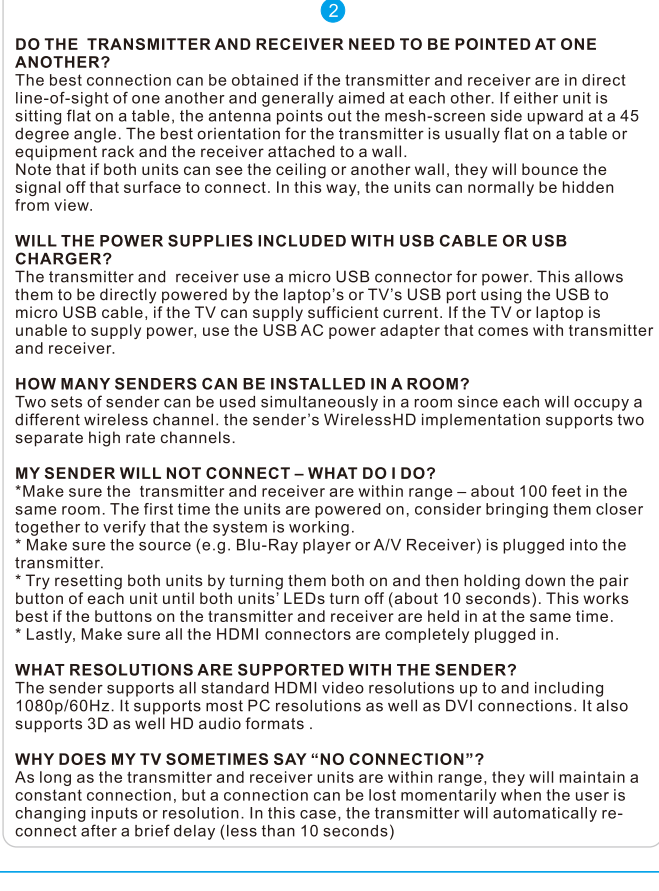

Frequently Asked Questions

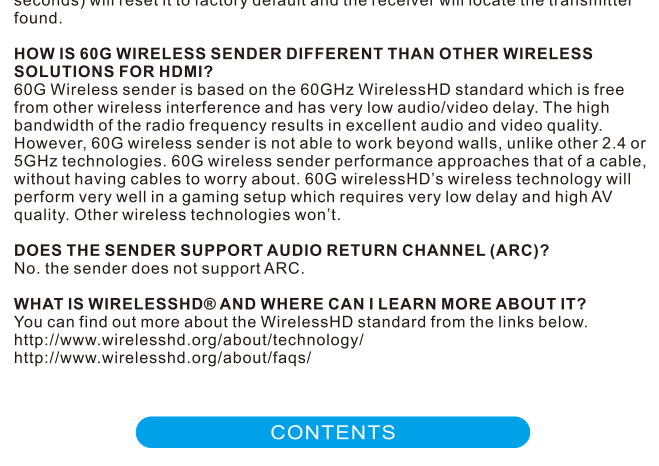

FAQ

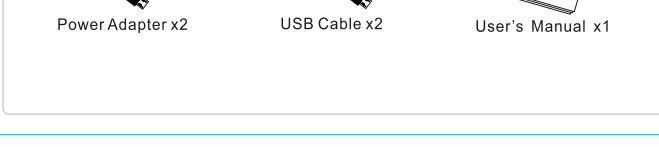

CONTENTS

