

Warning

- Only qualified service personnel should install and service this product to avoid injury.
- Observe all ESD procedures during installation to avoid damaging the equipment.

1 Preparing tools


Unpack the equipment and make sure the following tools are available and delivered contents are correct before you begin the installation procedure.

- 1-1. User-provided tools
- Anti-static wrist wrap

1-2. Packing List


Item	Description	Quantity
01	SEMIL 1700GC series system	1
02	Drivers & utilities disc	1

2 Overview

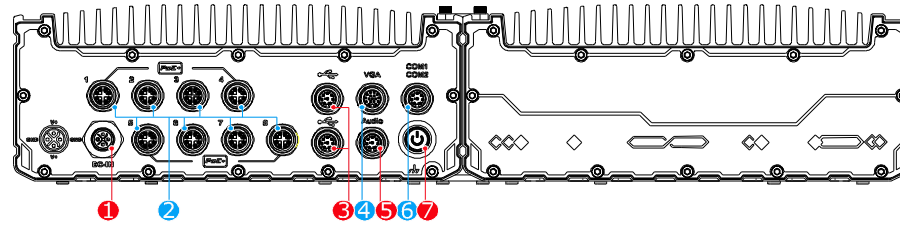

No.	Item	Description
1	DC input	8V to 48V DC input (M12 S-coded)
2	PoE+ GbE ports	The M12 X-coded Power over Ethernet (PoE) ports provide both data connection and electric power to devices (eg. IP camera).
		SEMIL -1724GC 1x IEEE 802.3at GbE+ port via Intel® I219
		SEMIL -1744GC 3x IEEE 802.3at GbE+ port via Intel® I210
		SEMIL - 1728GC 1x IEEE 802.3at GbE+ port via Intel® I219
		SEMIL- 1748GC 7x IEEE 802.3at GbE+ port via Intel® I210
3	USB 2.0 port	The USB 2.0 ports are backward-compatible with USB 1.1 / 1.0.
		SEMIL -1724GC 2x USB2.0 (M12 A-coded)
		SEMIL -1744GC
		SEMIL - 1728GC 4 x USB2.0 (M12 A-coded)
		SEMIL- 1748GC
4	VGA port	VGA output supports resolution up to 1920x1200@60Hz
5	Audio port	
6	COM ports	COM 1 & 2 are RS-232 ports via an M12 A-coded connector
7	Power button	Use this button to turn on or force shutdown the system.


3 DC-IN

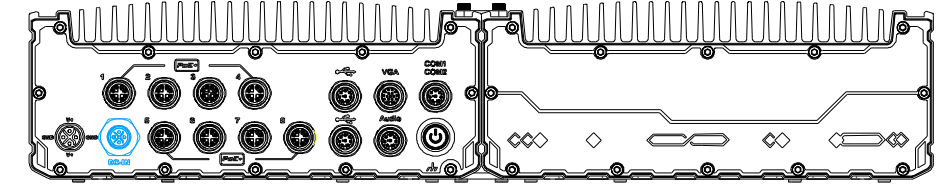

Warning


Please make sure the voltage of DC power is correct before you connect it to the system. Supplying a voltage over 48V will damage the system.

Connector Pin Definition

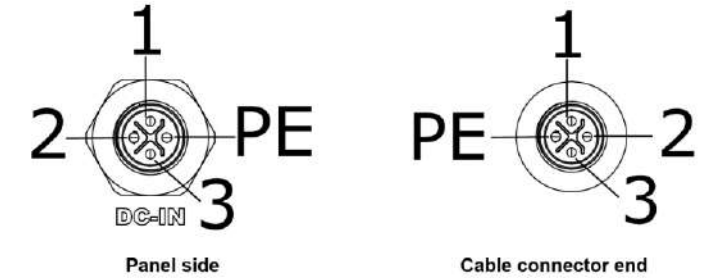

Signal	M12 panel side	M12 cable connector end	Wire color
V+	3	3	
GND	2	2	
V+	1	1	
GND	PE	PE	


4 PoE+ Gigabit Ethernet Port

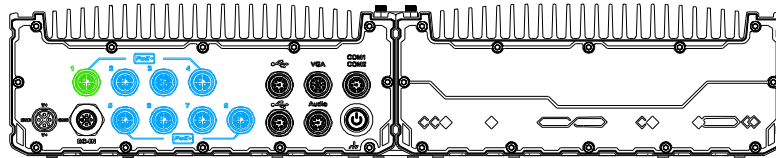

The number of ports for each SEMIL-1700GC model variant is listed below:


Model No.	PoE+ ports	Port description
SEMIL -1724GC	1x IEEE 802.3at GbE+ port via Intel® I219	
SEMIL -1744GC	3x IEEE 802.3at GbE+ port via Intel® I210	
SEMIL - 1728GC	1x IEEE 802.3at GbE+ port via Intel® I219	
SEMIL - 1748GC	7x IEEE 802.3at GbE+ port via Intel® I210	

Connector Pin Definition

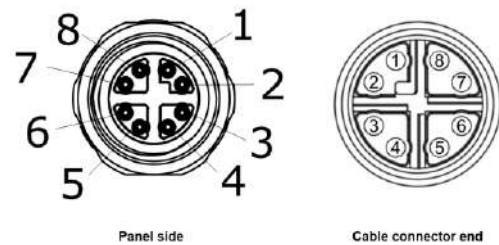


Signal	M12 panel side	M12 cable connector end	Wire color
LAN P0	1	1	
LAN N0	2	2	
LAN P1	3	3	
LAN N1	4	4	
LAN P3	5	5	
LAN N3	6	6	
LAN N2	7	7	
LAN P2	8	8	

5 USB Port

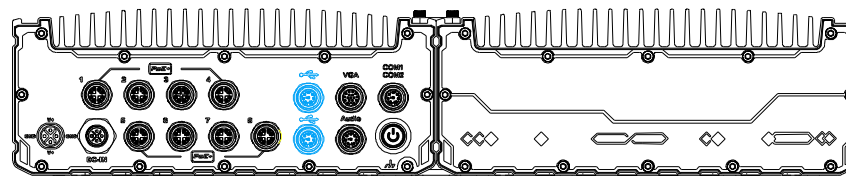


Connector Pin Definition

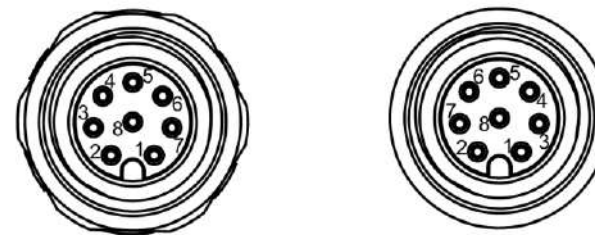


Signal	M12 panel side	M12 cable connector end	Wire color
D1+	1	1	
D1-	2	2	
VCC_USB	3	3	
GND	4	4	
GND	5	5	
VCC_USB	6	6	
D2-	7	7	
D2+	8	8	

6 VGA Port

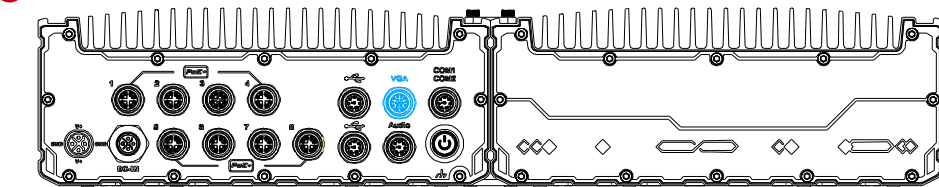


Connector Pin Definition

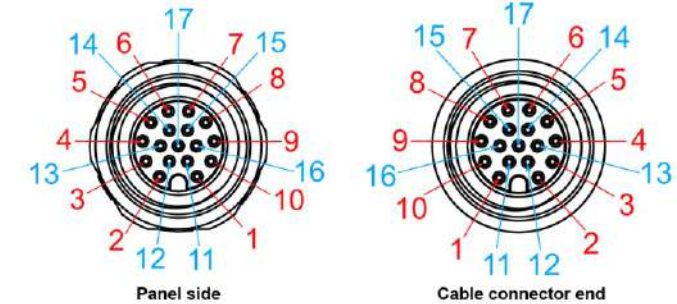


Signal	M12 panel side	M12 cable connector end	Wire color
Red	1	1	
GREEN	9	9	
BLUE	7	7	
GND	6	6	
GND	8	8	
GND	10	10	
GND	12	12	
GND	13	13	
GND	14	14	
GND	11	11	
GND	16	16	
GND	15	15	
PSV_VGA	17	17	
VGA_SDA	5	5	
HSYNC_CN	3	3	
VSNC_CN	2	2	
VGA_SCL	4	4	

7 Audio Port (SEMIL-1728GC/ 1748GC Only)

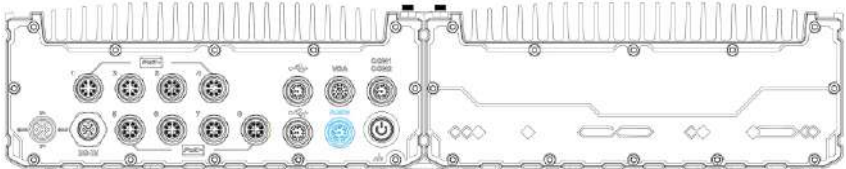


Pin Definition

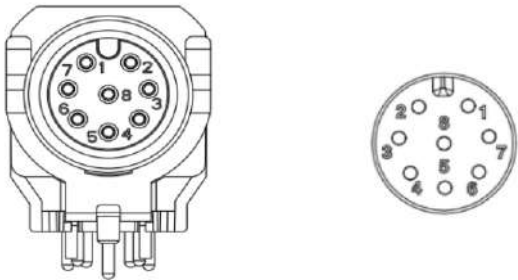


Socket end		Cable side	
Signal	M12 Socket end	M12 cable side	
Left channel	4	4	
Right channel	5	5	
Microphone	7	7	
Ground	8	8	

8 COM Port

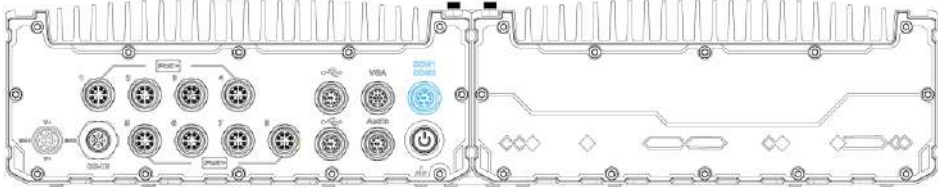


Connector Pin Definition

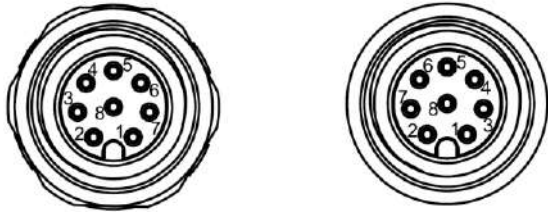

Signal	Panel side		Cable connector end	
	M12 panel side	M12 cable connector end	Wire color	
TXD1	1	1		
RXD1	2	2		
NC	3	3		x
PWR_IGN	4	4		
GND	5	5		
NC	6	6		x
RXD2	7	7		
TXD2	8	8		

9 Power Button

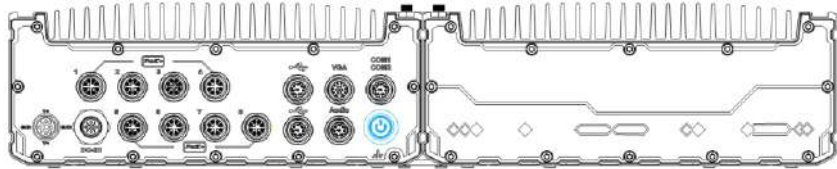

The power button is a non-latched switch for ATX mode on/off operation. To turn on the system, press the power button and the PWR LED should light-up green. To turn off the system, issuing a shutdown command in OS is preferred, or you can simply press the power button. To force shutdown when the system freezes, press and hold the power button for 5 seconds. Please note that there is a 5-second interval between on/off operations (i.e. once the system is turned off, there is a 5-second wait before you can power-on the system).

