



Color Variants

VR414111
Stainless steel
Width 38 cm

Included accessories

- 1 x cast pan.
half size.
- 2 x cast iron grill.
- 1 x lava stones.
- 1 x cleaning brush.

VR414111
Vario electric grill 400 series
Stainless steel
Width 38 cm

Two zones can be operated together or separately
Cast pan, half size, for simultaneous frying and grilling on two separate surfaces
Open cast grill, lava stones
Solid stainless steel control knob
Precision crafting of 3 mm stainless steel
For surface mounting with a visible edge or for flush mounting
Can be combined perfectly with other Vario appliances of the 400 series

Capacity
Control knobs with illuminated ring, cooking zone and output level markings.
Electronic control in 12 output levels.

Features
Cooktop, lava stone trough and grease collecting insert from stainless steel.
Two zones, each 1500 W, can be operated together as a complete surface or each half separately.
Two-part cast grill.

Safety
Safety shut-off.
Pre-heat and residual heat indicator.


Performance
Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads. Additional instructions for flush mounting:
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
A minimum lateral clearance of at least 100 mm from adjacent heat-sensitive furniture or from the wall must be observed.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 26. kg

Connection
Total connected load 3.0 KW.
Connecting cable 1.5 m without plug.

Characteristics
Product name/family
Vario/Domino barbecue grill
Built-in / Free-standing
Built-in
Energy input
Electric
Type of control
Electronic
Grill grating material
Cast iron
Min. required niche size for installation (HxWxD)
118 x 360 x 492
Width of the appliance
380
Dimensions
118 x 380 x 520
Dimensions of the packed product (HxWxD)
400 x 460 x 600
Net weight
26.4
Gross weight
30.2
Residual heat indicator
Separate
Location of control panel
Hob front
Basic surface material
Cast iron
Color of surface
Stainless steel, Stainless steel
Color of frame
Stainless steel
Length electrical supply cord
150
EAN code
4242006280154
Electrical connection rating
Gas connection rating
Fuse protection
16
Voltage
220-240
Frequency
50-60
Included accessories
1 x cast pan, half size, 2 x cast iron grill, 1 x lava stones, 1 x cleaning brush


Consumption and connection features
2023-01-27
Page 1



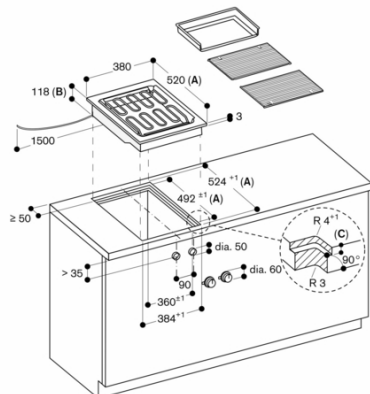

- A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)
B: 133 mm in the area of the cable clamp (left, on the rear side)
C: 3.5^{+0.5}
6.5^{+0.5} in combinations with frameless induction hobs


measurements in mm

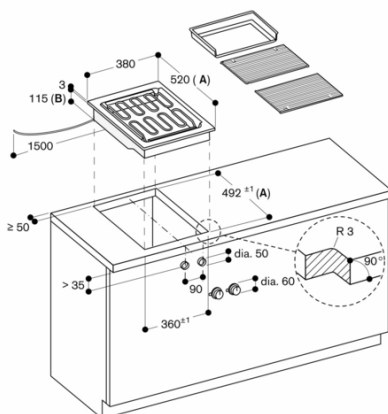

- A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)
B: 130 mm in the area of the cable clamp (left, on the rear side)


measurements in mm

Installation of the control knob; flush installation

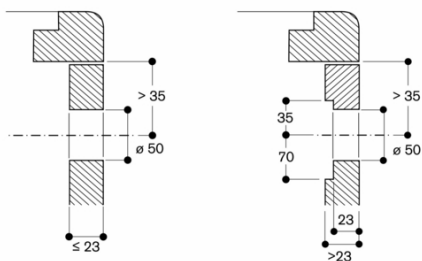


measurements in mm

Installation of the control knob; surface mounting

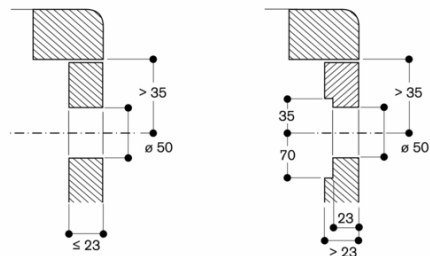


measurements in mm

Installation with appliance cover, surface mounting

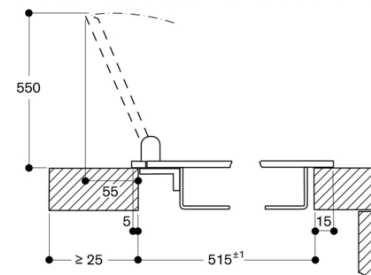

measurements in mm


Installation with appliance cover, flush mounting

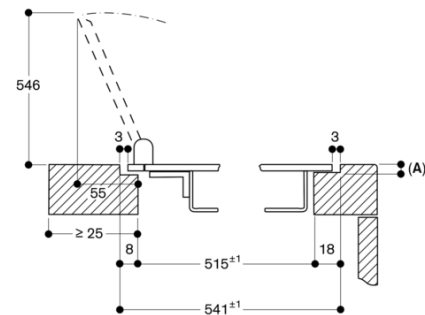

A: 3.5^{+0.5}

measurements in mm


Longitudinal section

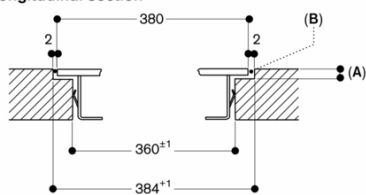

- A: $3.5_{-0.5}^{+0.5}$ in combinations with frameless induction hobs
B: Fill with silicone

measurements in mm


View from above



- A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm

Cross-section

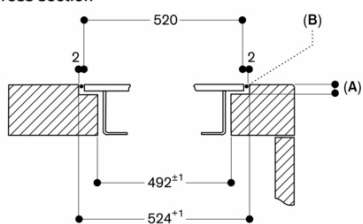


- A: $3.5_{-0.5}^{+0.5}$ in combinations with frameless induction hobs
B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.


measurements in mm

Installation with appliance cover, surface mounting

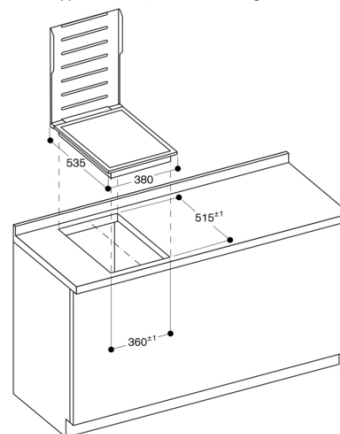

measurements in mm

Installation with appliance cover, flush mounting

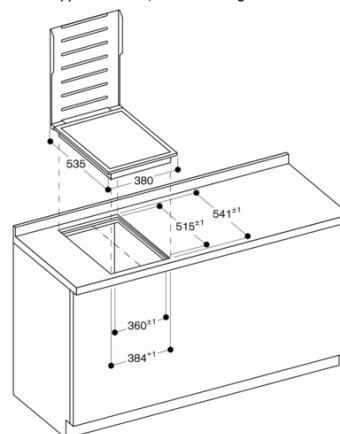

measurements in mm