

图纸提供单位

深圳市爱培科技股份有限公司

项目名称

CJ1005-XS21120140 -说明书

物料编号

物料编号：1601007-1331-0

版本号

版本号码：V2

设计时间

设计日期：2022-02-10

设计师

责任设计师：孙雯

材质工艺要求

尺寸：110mmx95mm

颜色及 专色：

纹理要求：

变更履历：

- 1.更新了APP名称
- 2.更新入力：本体5V＝2A、增加保修时间
- 3.添加ios下载二维码
- 4.修改英文版机器名称
- 5.增加认证信息
- 6.增加安卓下载二维码
- 7.修改日规内容
- 8.增加认证注意事项,修改箭头颜色

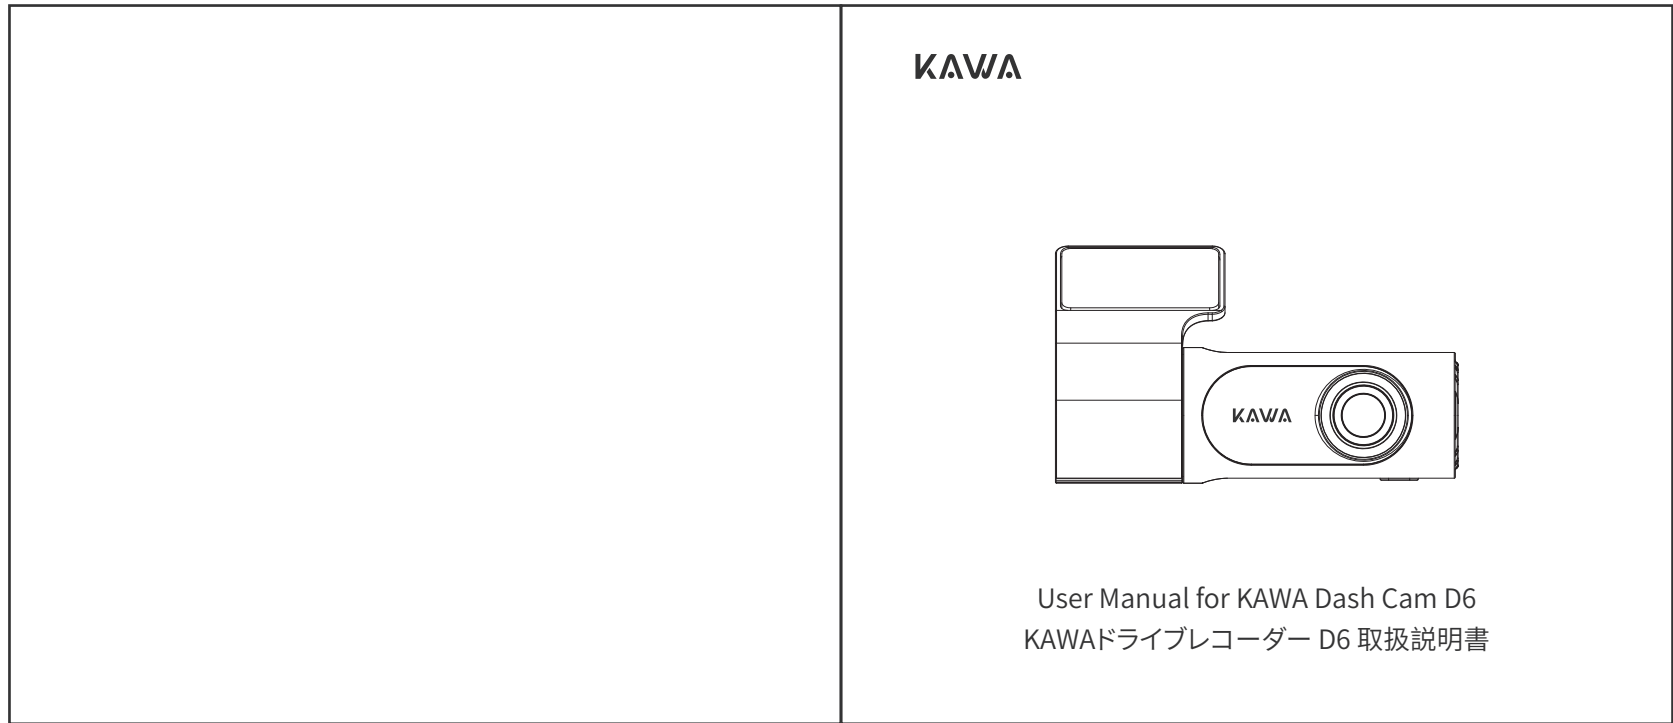
比例 1:1 单位 mm

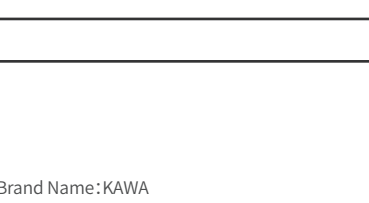
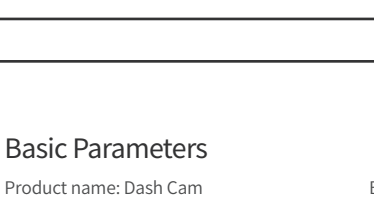
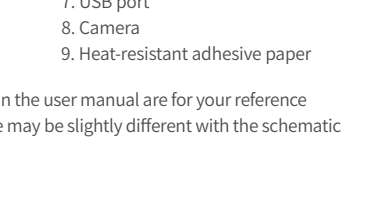
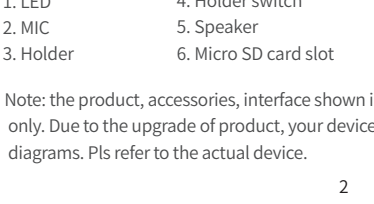
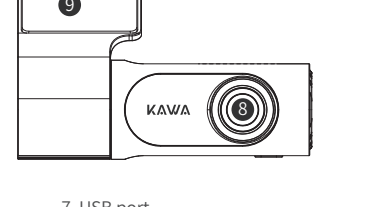
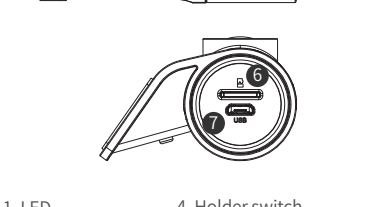
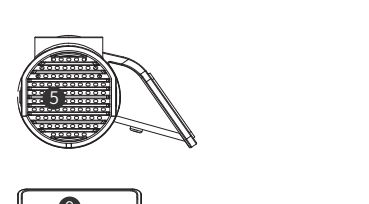
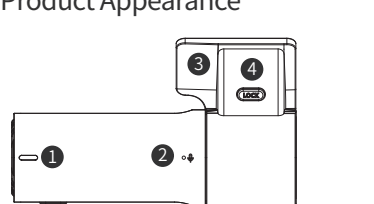
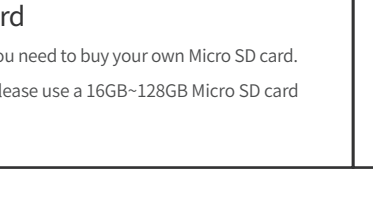
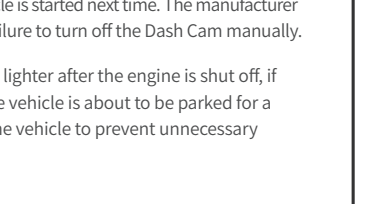
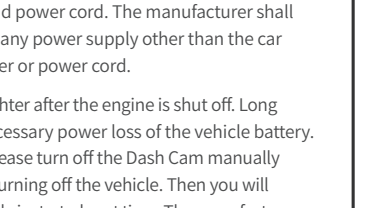
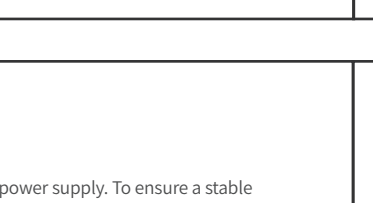
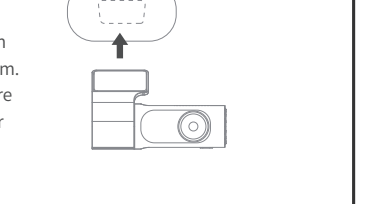
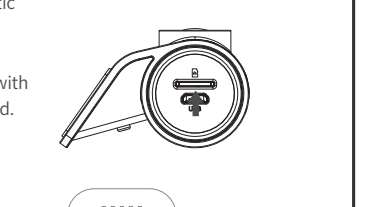
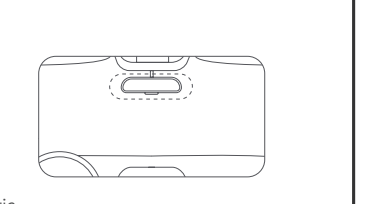
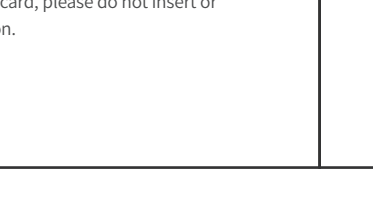
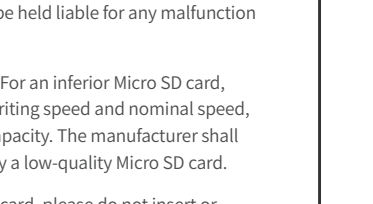
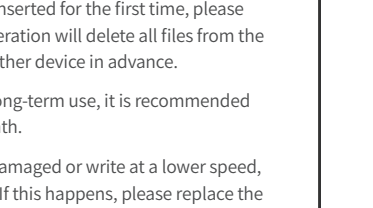
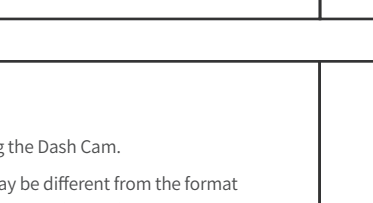
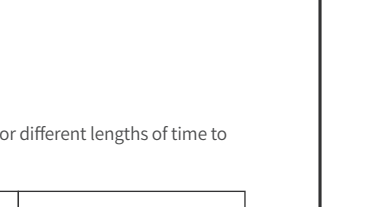
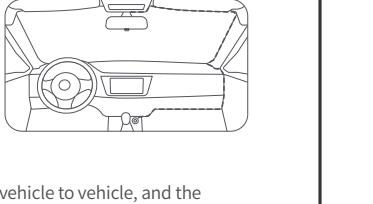
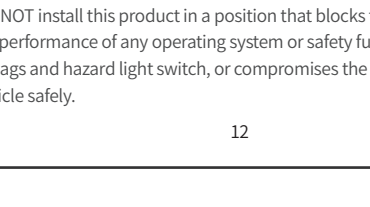
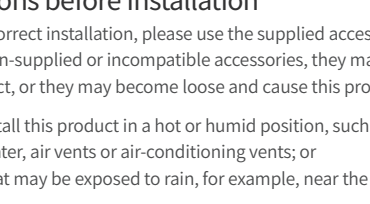
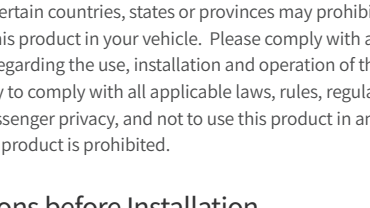
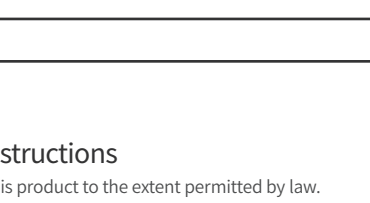
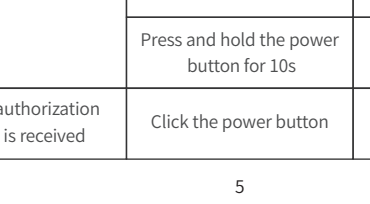
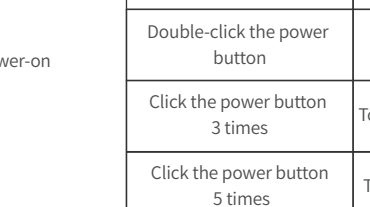
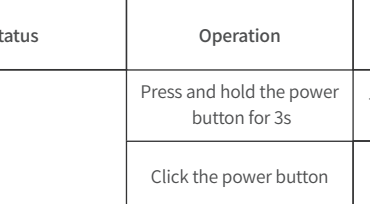
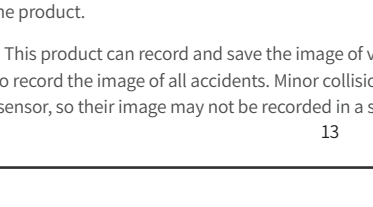
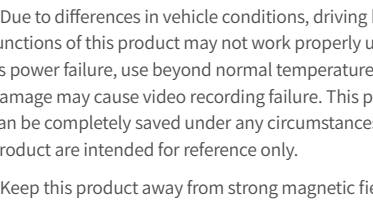
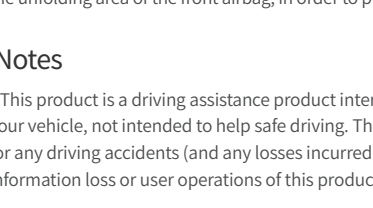
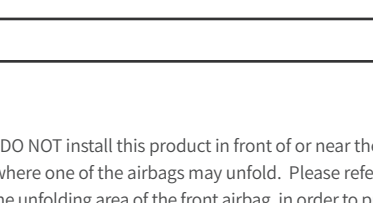
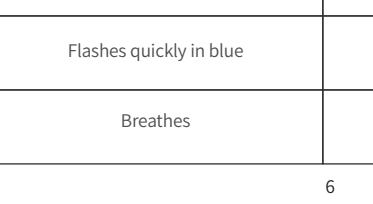
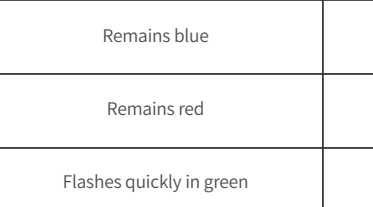
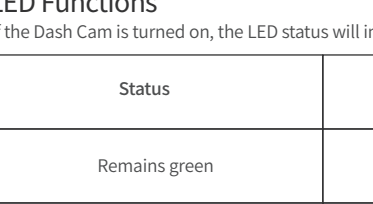
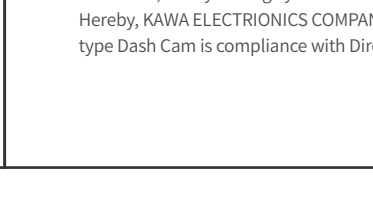
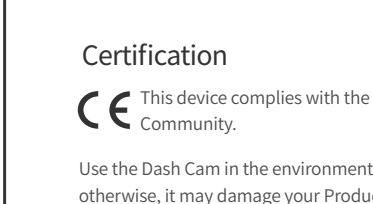
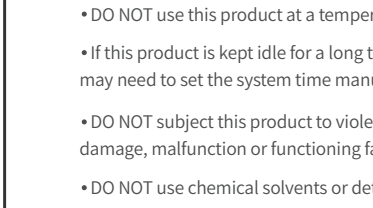
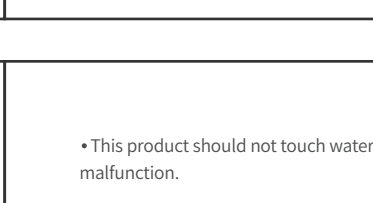
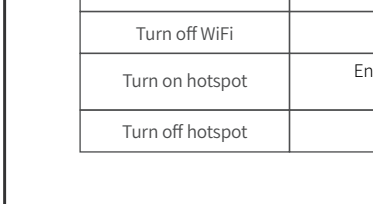
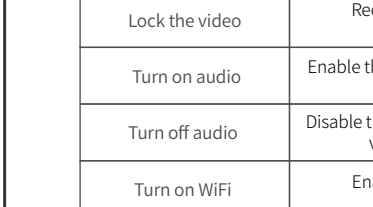
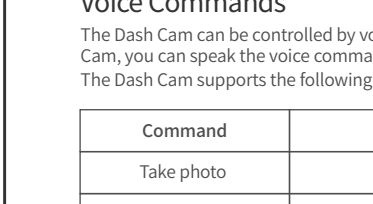
封底

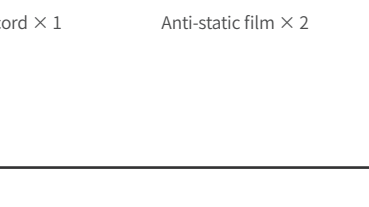
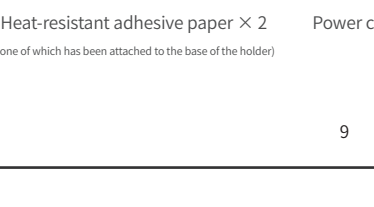
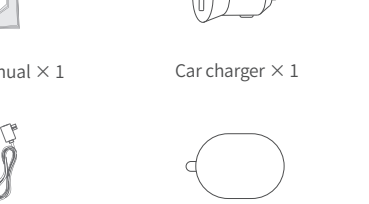
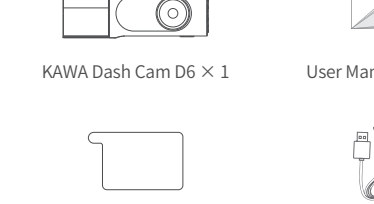
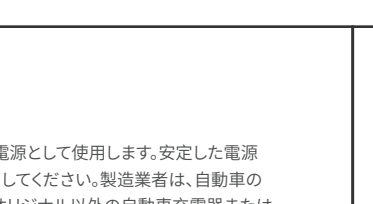
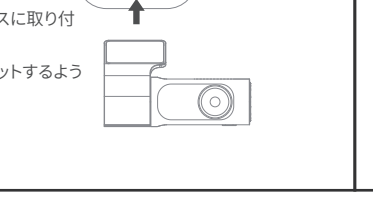
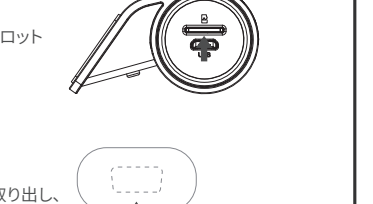
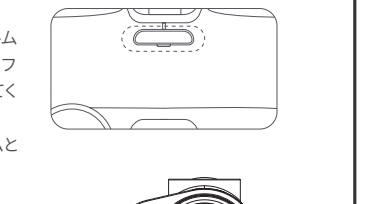
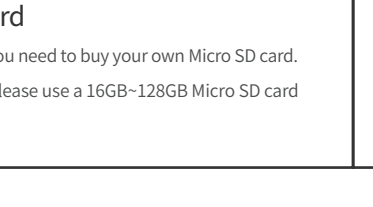
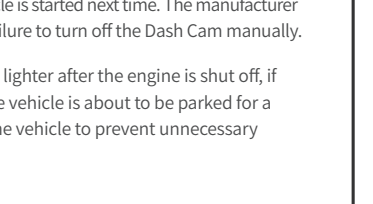
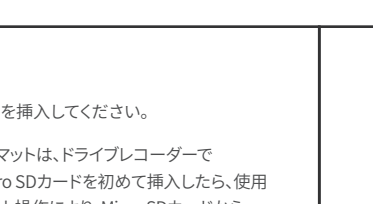
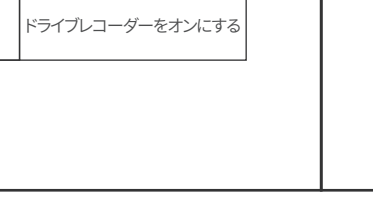
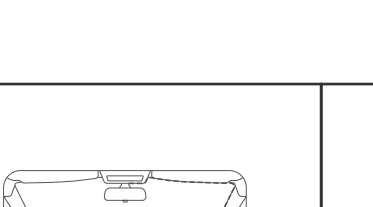
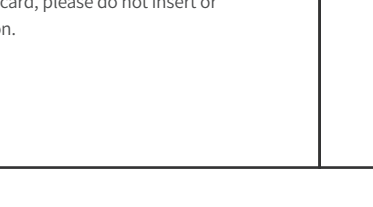
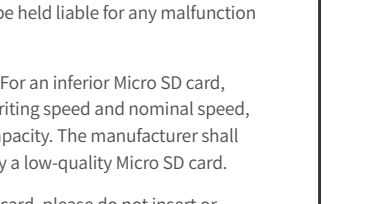
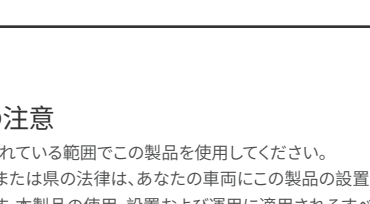
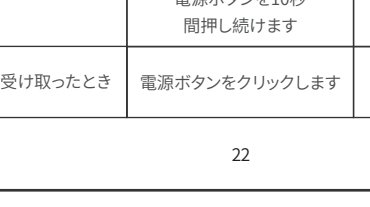
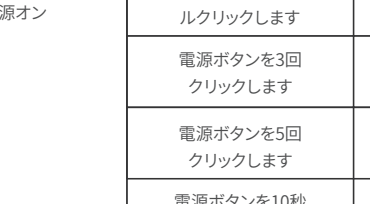
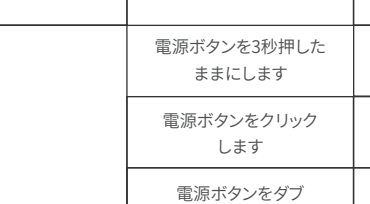
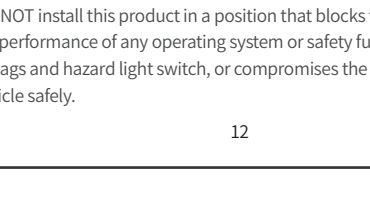
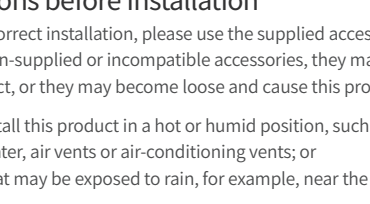
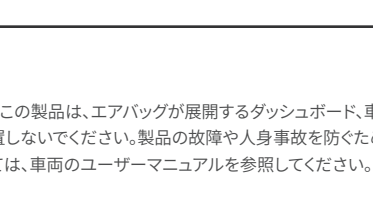
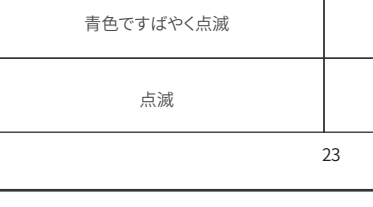
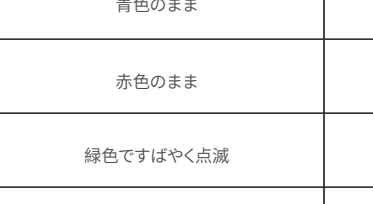
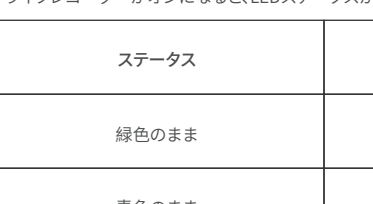
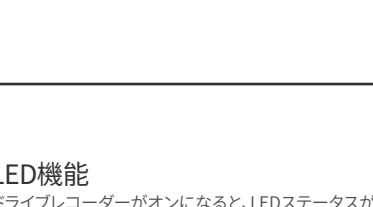
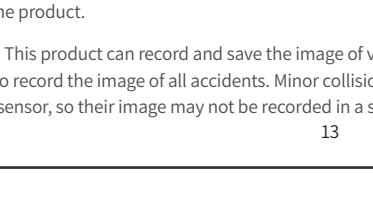
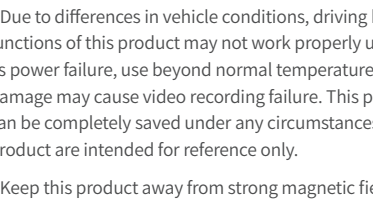
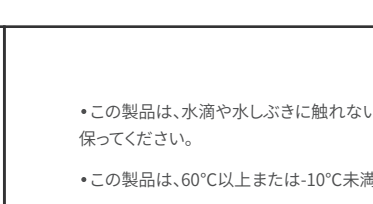
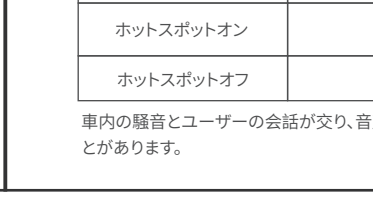
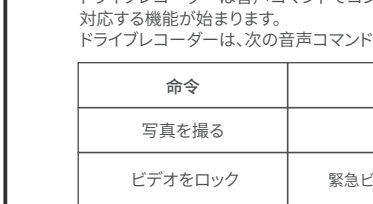
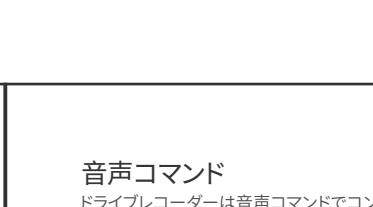
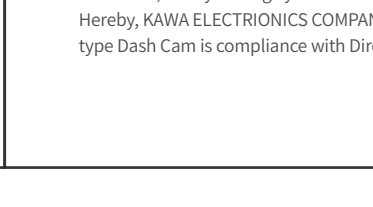
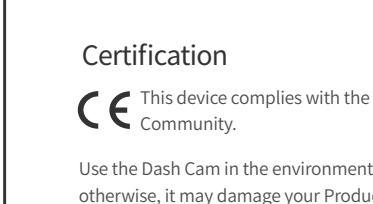
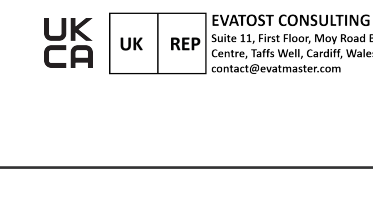
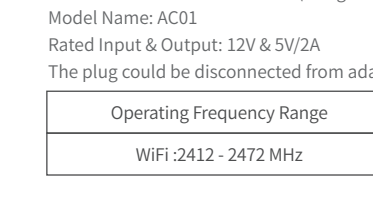
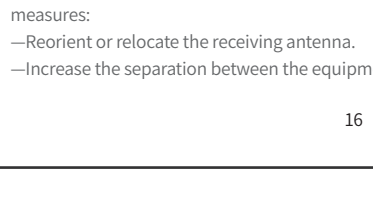
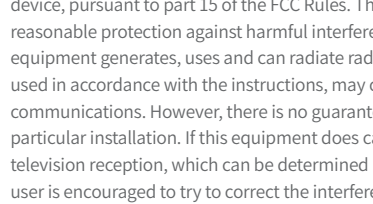
封面

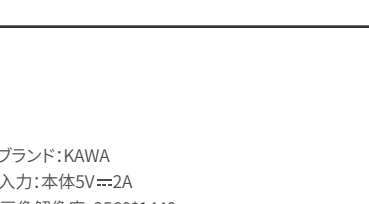
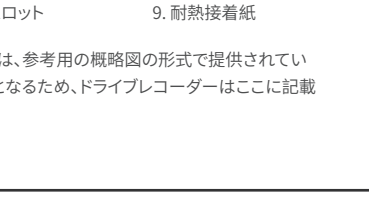
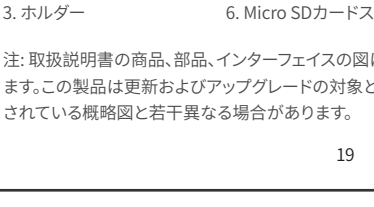
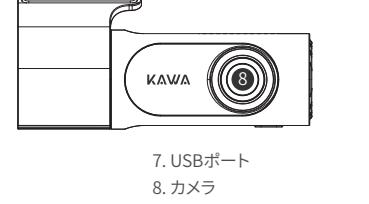
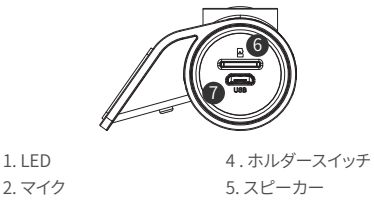
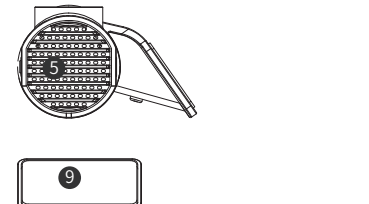
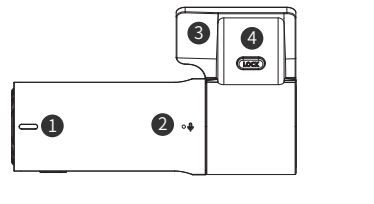
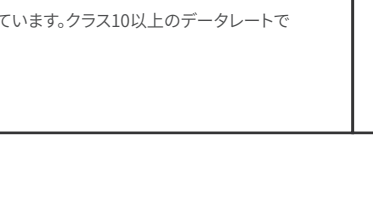
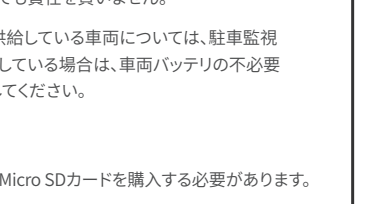
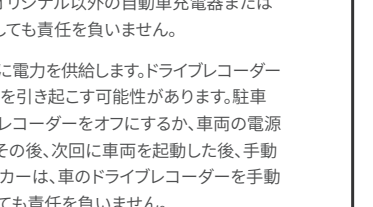
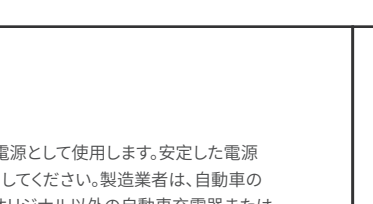
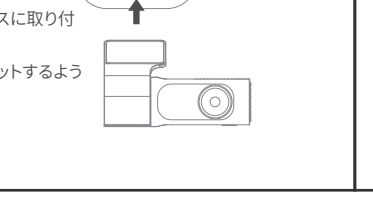
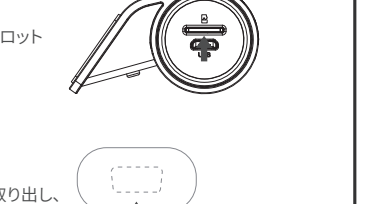
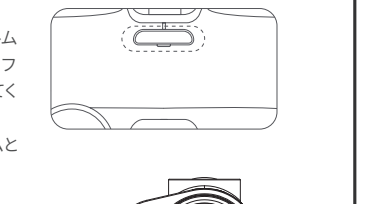
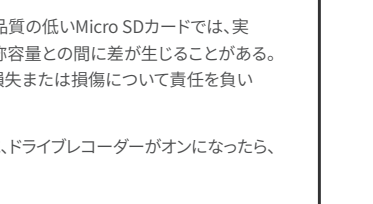
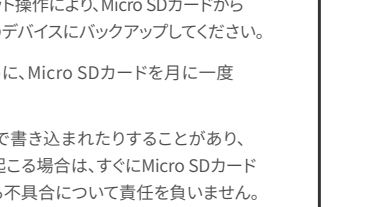
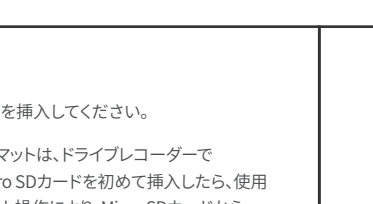
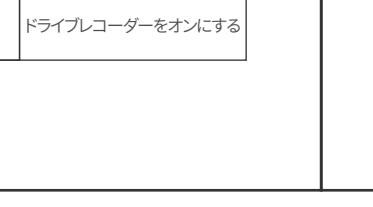
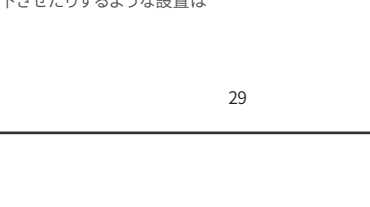
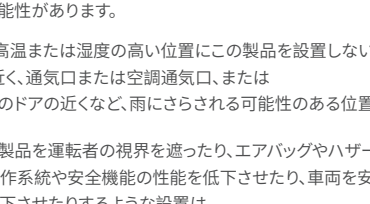
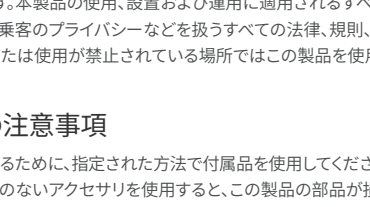
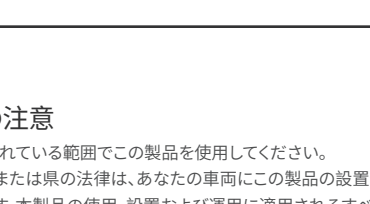
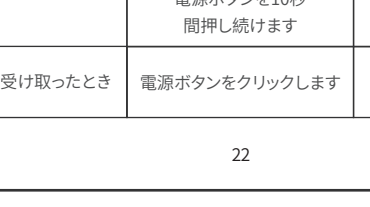
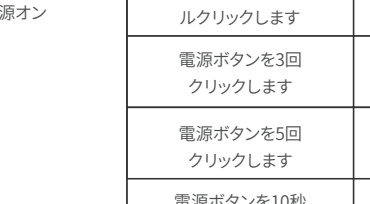
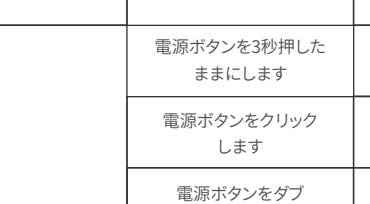
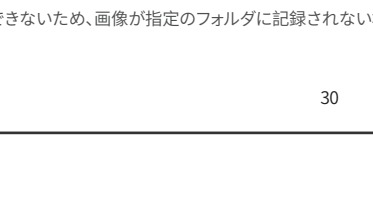
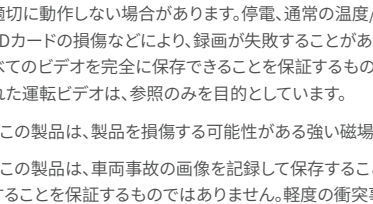
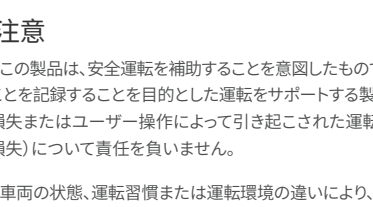
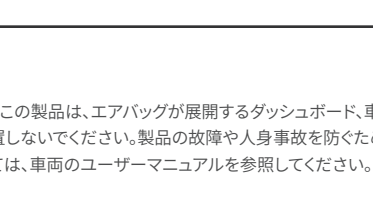
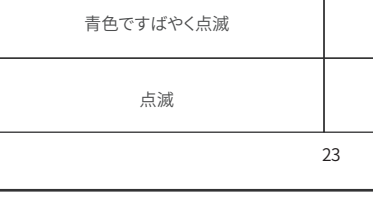
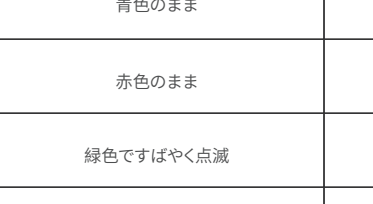
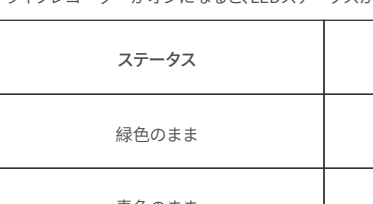
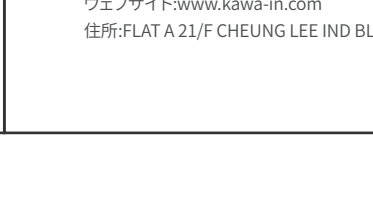
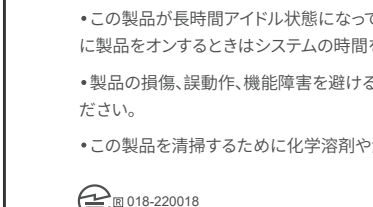
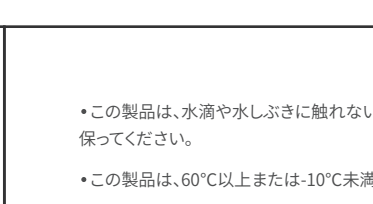
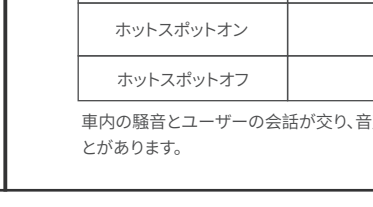
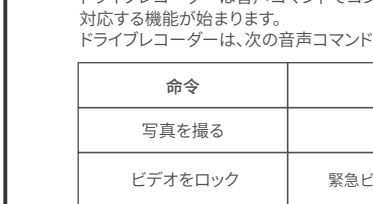
封二

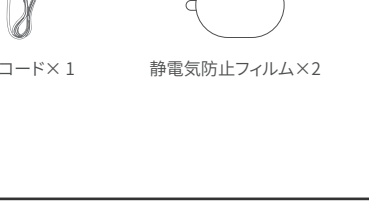
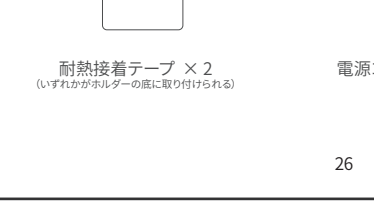
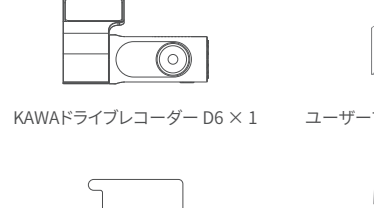
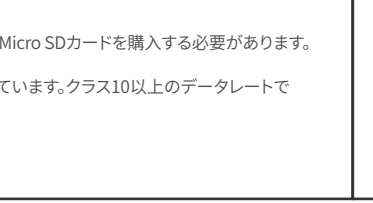
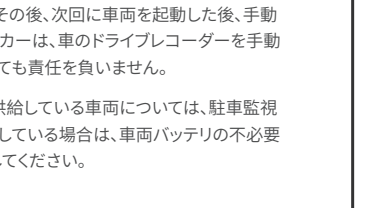
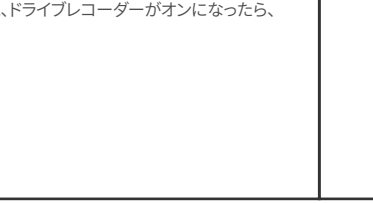
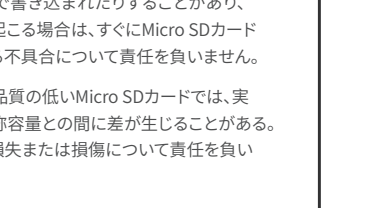
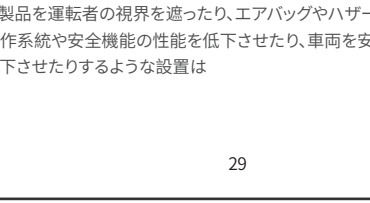
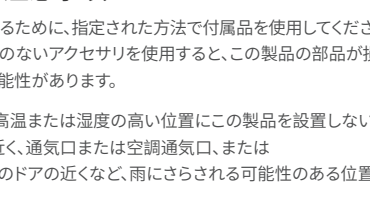
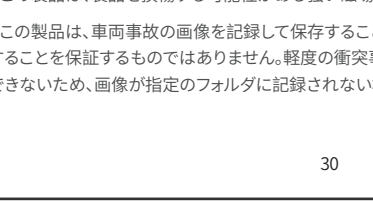
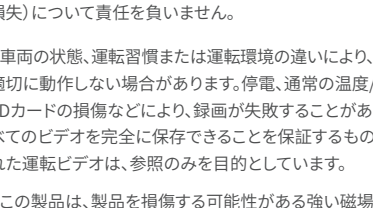
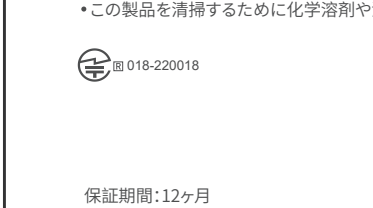
封三



Directory Product Appearance Product Installation Basic Functions LED Functions Voice Commands Download KAWA App Basic Parameters Items packed into the box User guide of Power Supply Instructions for Use of Micro SD card Safety Instructions Precautions before Installation Notes Certification	Product Appearance  1. LID 2. Holder 3. Micro SD card 4. Holder switch 5. Speaker 6. Micro SD card slot 7. USB port 8. Camera 9. Heat resistant adhesive pad	Product Installation  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	4. Basic Guides and Connect the Power  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	Status  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	LED Functions  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	Voice Commands  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.
---	---	--	---	--	---	--

Due to the complexity of the sound environment in the car and the diversity of the car's audio system, sometimes the voice commands may not be recognized or not recognized correctly. Download KAWA DVR App  QR code for Android App QR code for iOS App Please scan the QR code to download and install the KAWA DVR App. After successful installation, please open the app and log in with your account. If you have any questions, please contact our customer service.	Basic Parameters  1. LID 2. Holder 3. Micro SD card 4. Holder switch 5. Speaker 6. Micro SD card slot 7. USB port 8. Camera 9. Heat resistant adhesive pad	User guide of Power Supply  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	4. Basic Guides and Connect the Power  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	Status  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	LED Functions  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	Voice Commands  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	Caution  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	FCC RF Exposure Warning Statements  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	RF Exposure Statement  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.
--	---	--	---	--	---	--	---	--	---

目次 製品の概要 製品の仕様 LED機能 基本機能 KAWA DVRアプリダウンロード 基本パラメータ 箱の中身 電源装置の使用法 安全上の注意 注意事項	製品の外観  1. LID 2. Holder 3. Micro SD card 4. Holder switch 5. Speaker 6. Micro SD card slot 7. USB port 8. Camera 9. Heat resistant adhesive pad	製品の設置  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	4. Basic Guides and Connect the Power  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	Status  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	LED Functions  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	Voice Commands  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.
--	--	--	--	---	--	---

KAWA DVRアプリのダウンロード  QR code for Android App QR code for iOS App Please scan the QR code to download and install the KAWA DVR App. After successful installation, please open the app and log in with your account. If you have any questions, please contact our customer service.	基本パラメータ  1. LID 2. Holder 3. Micro SD card 4. Holder switch 5. Speaker 6. Micro SD card slot 7. USB port 8. Camera 9. Heat resistant adhesive pad	電源装置の使用法  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	安全上の注意  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	Status  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	LED Functions  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.	Voice Commands  1. Install the Dash Cam 2. Remove the protection film from the heat resistant adhesive pad on the back of the holder, and attach the Dash Cam to the windshield after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts. Do not touch the Dash Cam for 10 seconds after the car starts.
---	--	---	---	---	--	---