

ALESSIsense

by



Alessi Sense by Oras

Installation and maintenance guide






4



5-13



13-15



16-21




22





8710F

I (ISO 3822)
EN 15091
100 - 1000 kPa
0.07 l/s (300 kPa w/Controller)
200 kPa (0.1 l/s)
max. +70°C

IP 44
Lithium 2CR5 6 V

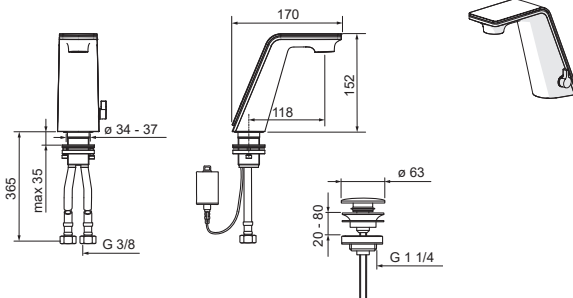

CE (EMC 2014/30/EU , 2011/65/EU)




mpi.oras.com/8710F



8712F

I (ISO 3822)
EN 15091, EN 1113, EN 1111
100 - 1000 kPa
0.07 l/s (300 kPa w/Controller)
200 kPa (0.1 l/s)
max. +70°C





IP 44
Lithium 2CR5 6 V, AA 1.5 V
Lithium x 2, CR 2450 3 V

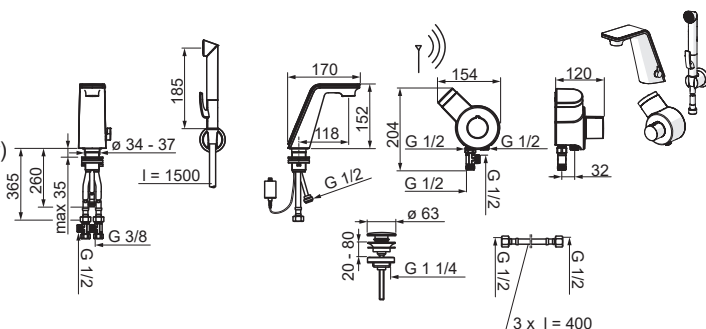



CE (EMC 2014/30/EU , 2011/65/EU)





mpi.oras.com/8712F







1

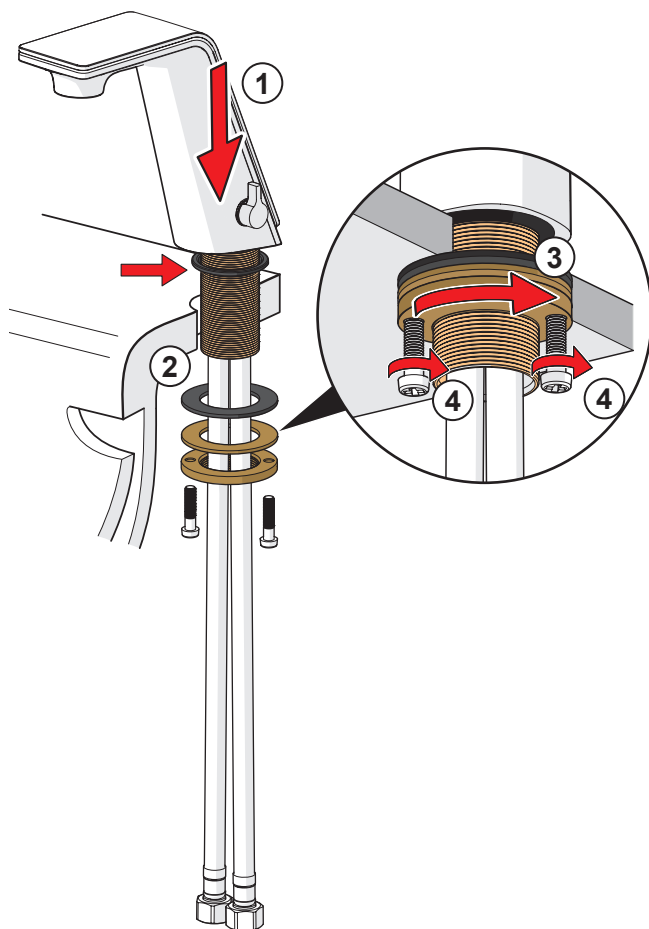




① ②





2

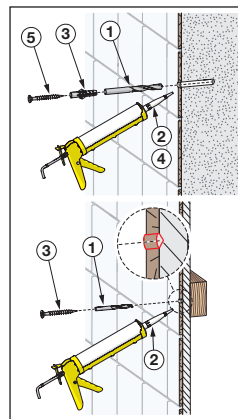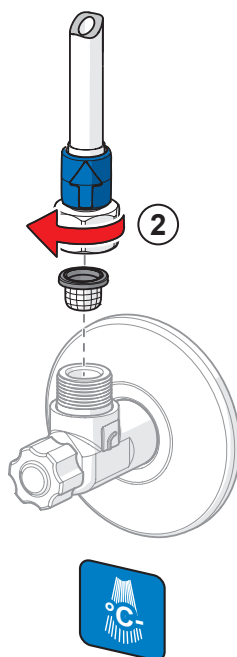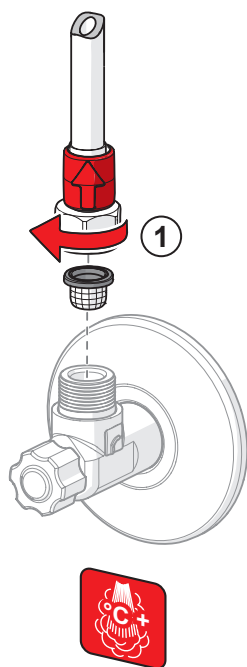





① ... ④

2

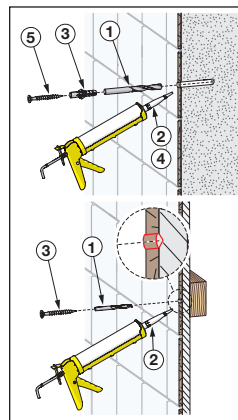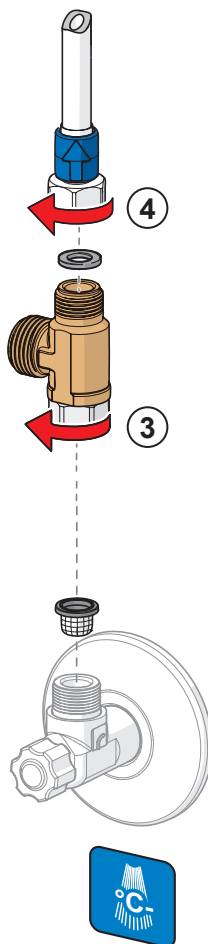
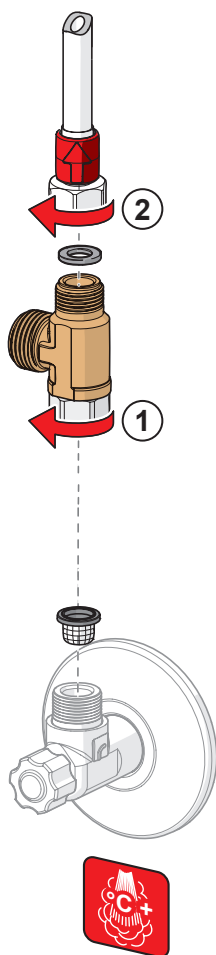







①




3 8712F

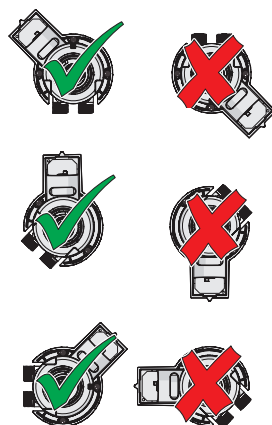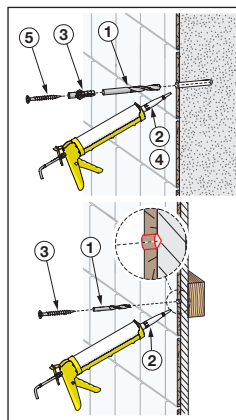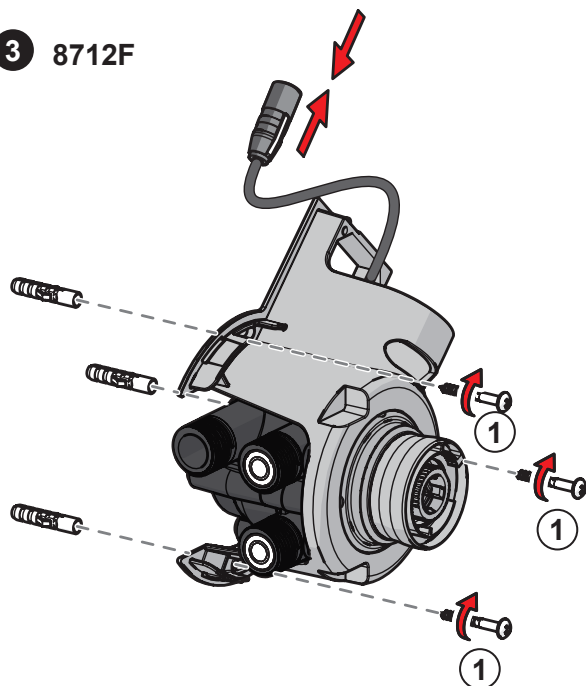




4 8712F


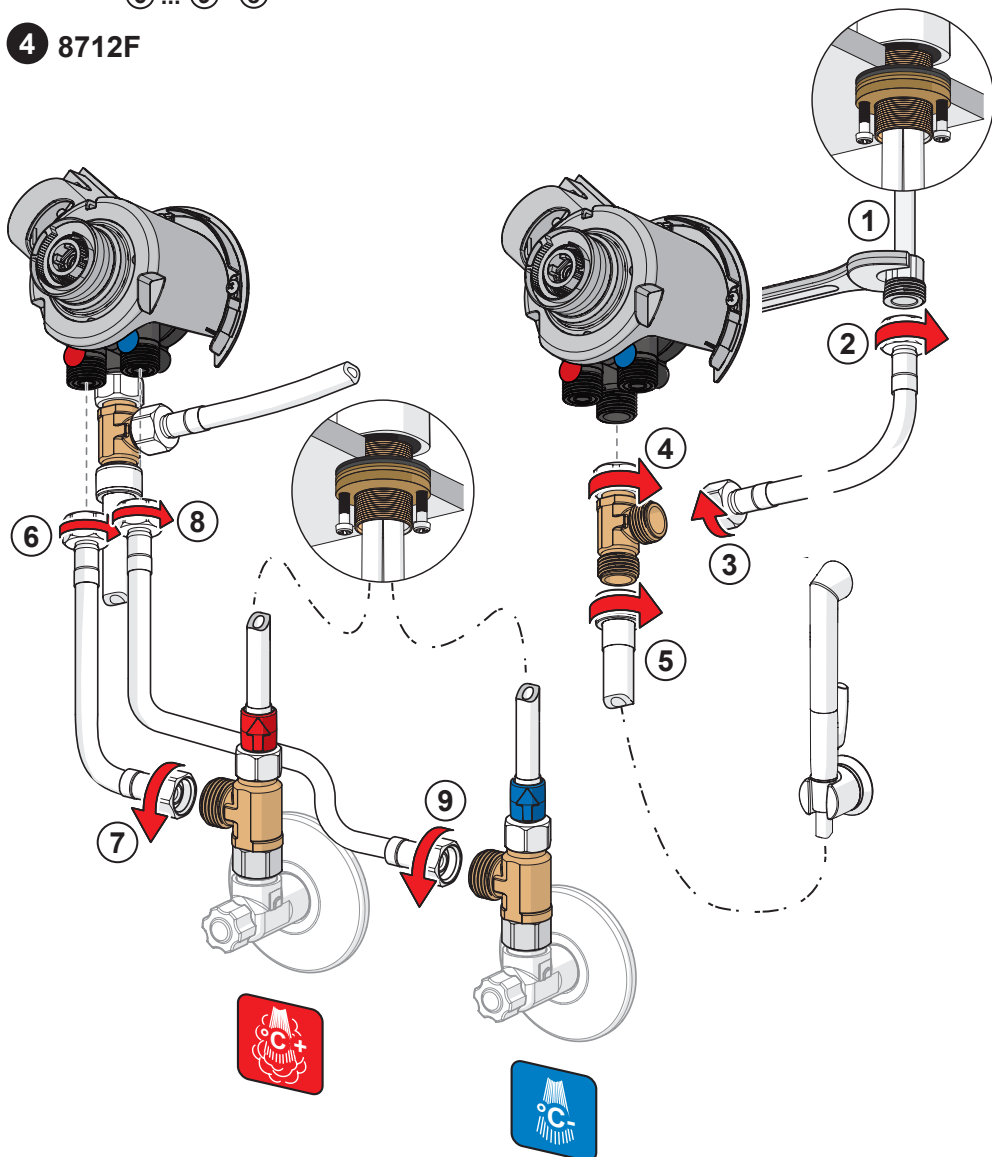







5








AA 1.5V x 2
Lithium

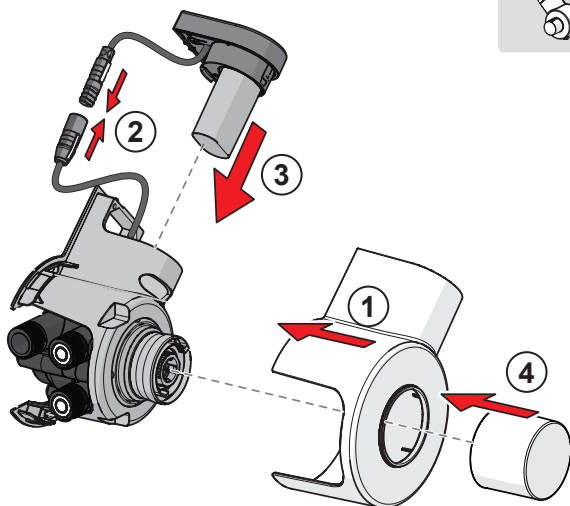


6

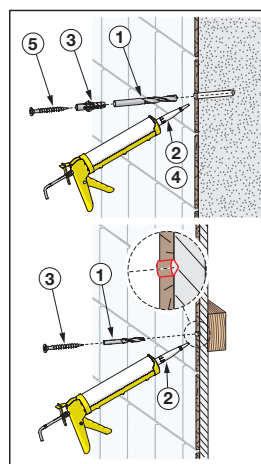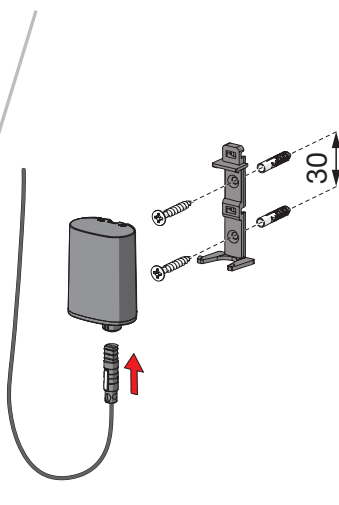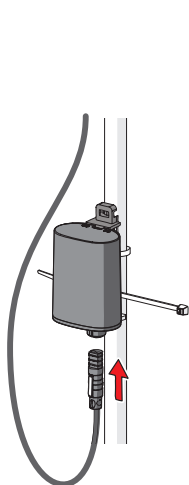

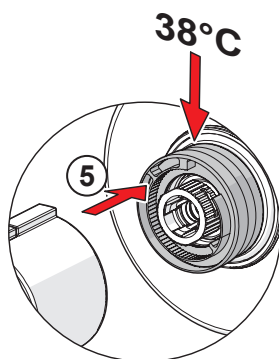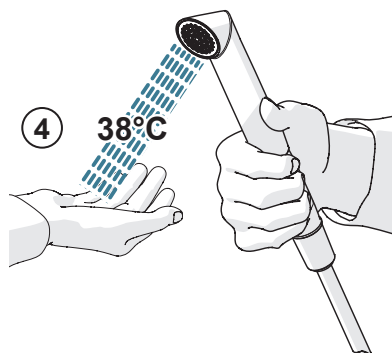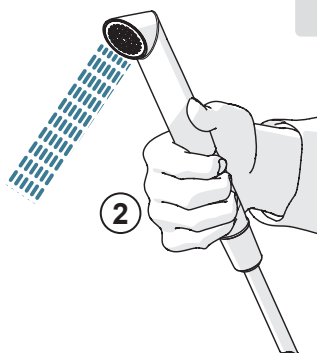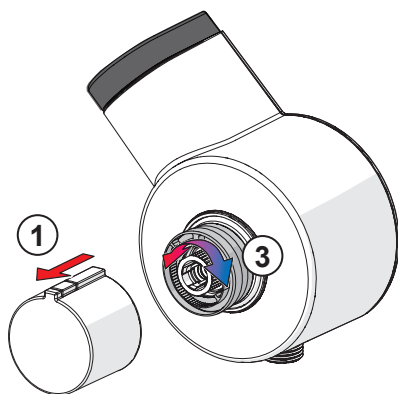








① ③



②

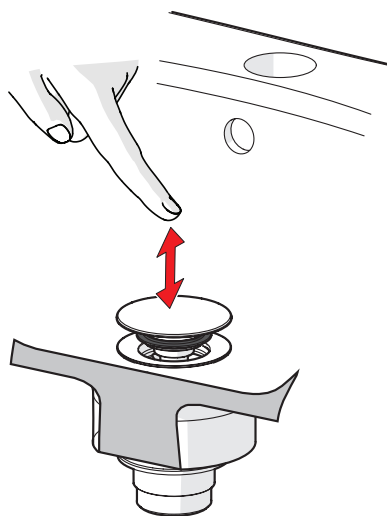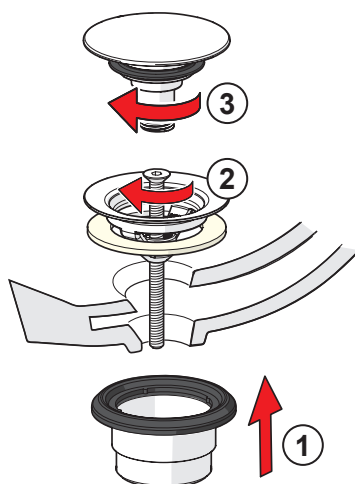


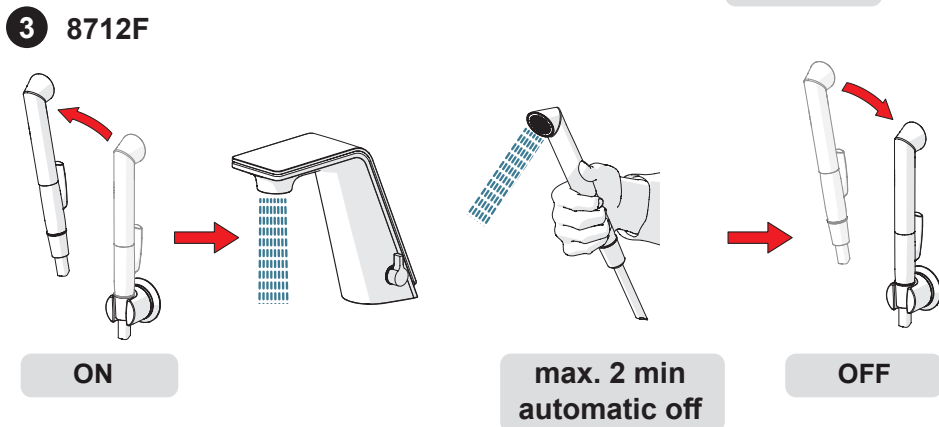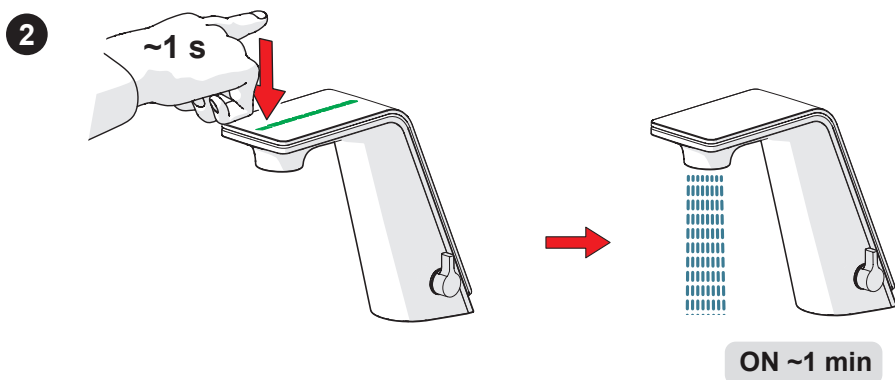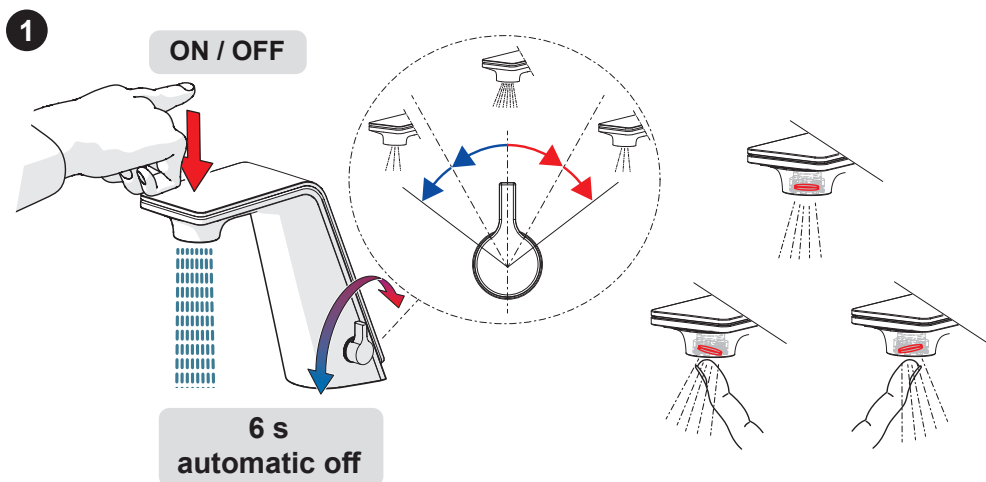


- 1) Short lights OFF
2) Short lights ON
3) Factory settings





Factory default	1 x	2 x	3 x	4 x	5 x	6 x	7 x	8 x
Max short flow (sec)	1 x	6	8	10	15	20	30	60
Max long flow (sec)	2 x	30	45	60	90	120	240	600
Automatic flush (h)	3 x	0	12	24	48	72	-	-
Automatic flush (sec)	4 x	10	30	60	120	180	240	600
Operation mode	5 x	OFF ⁽¹⁾	ON ⁽²⁾	FS ⁽³⁾	-	-	-	-


Example 1: Max short flow 6 s → 30 s

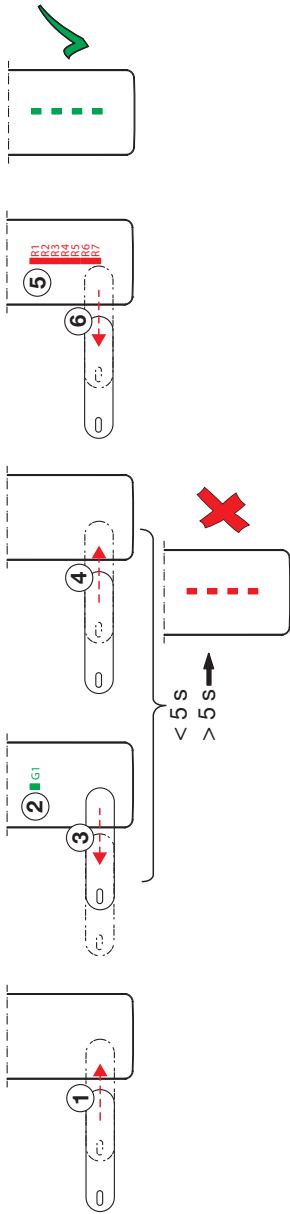

Example 2: Operation mode → FS = factory settings

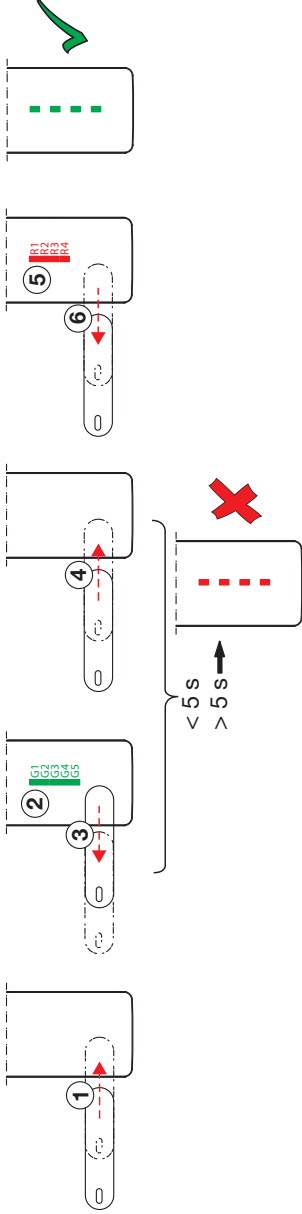


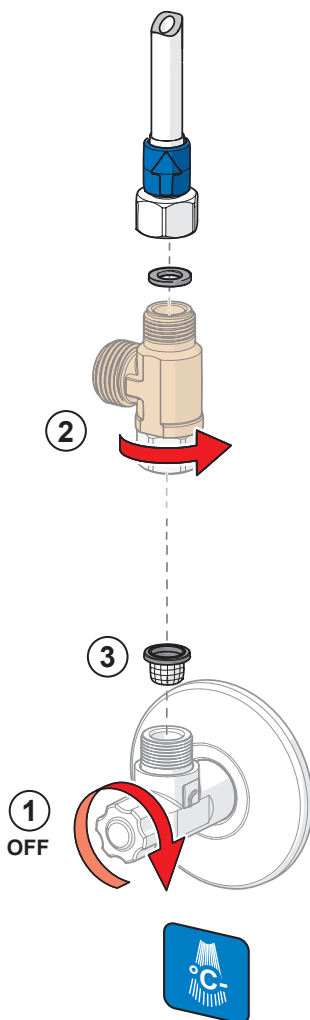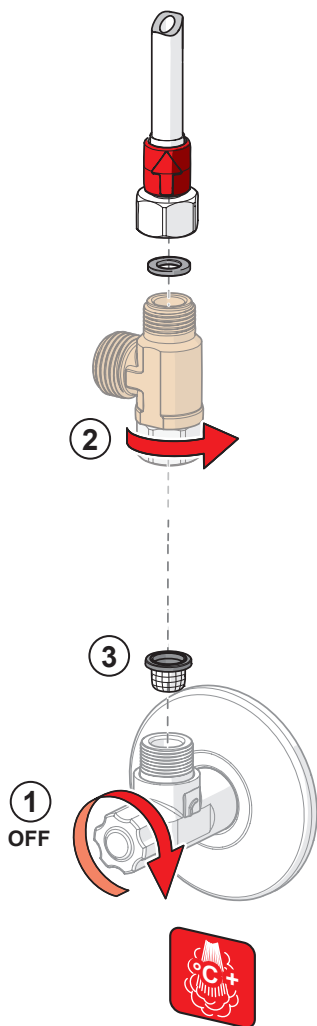




①

1

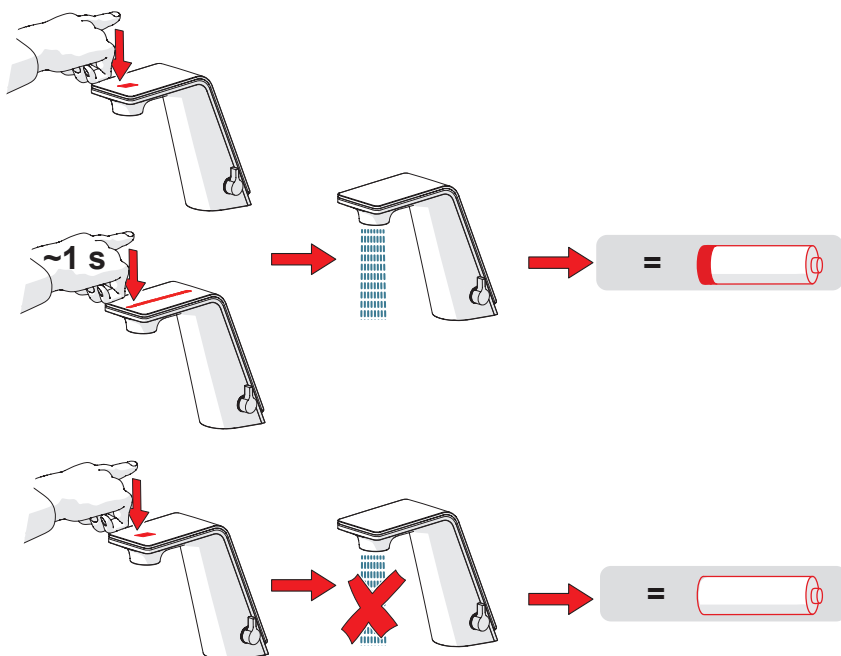

2

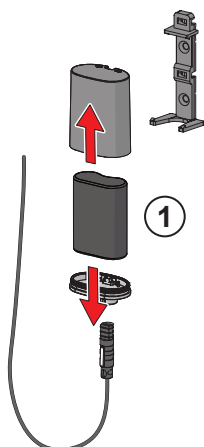

①





Lithium
CR2450 3 V




④

①






②



① ②


③

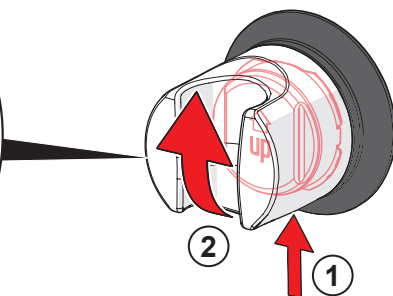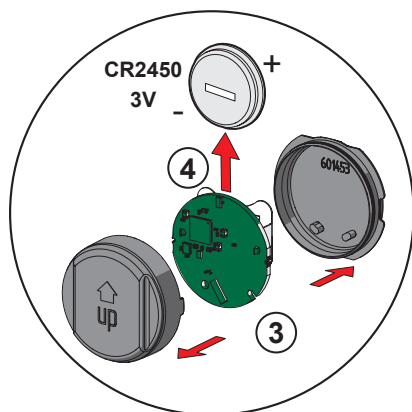





②

① 8712F

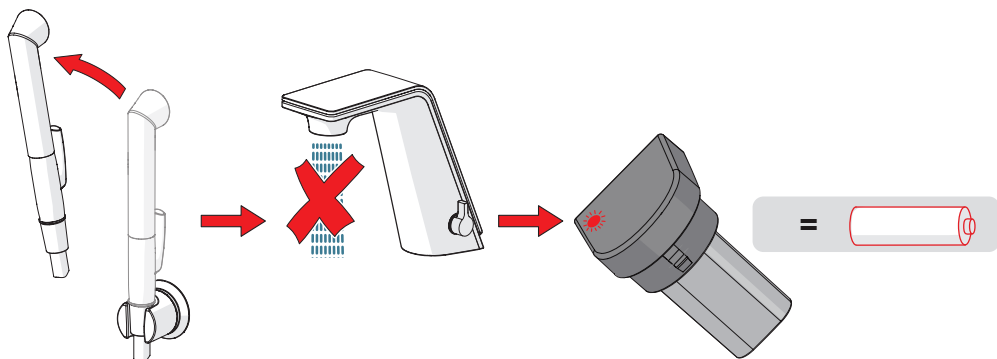

②


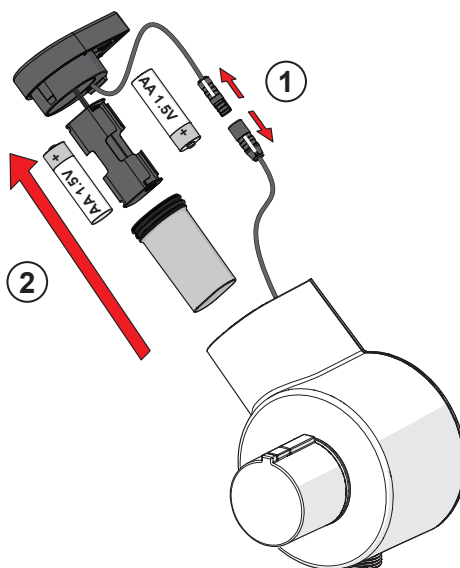




① ② ④

⑤ ⑥

⑦

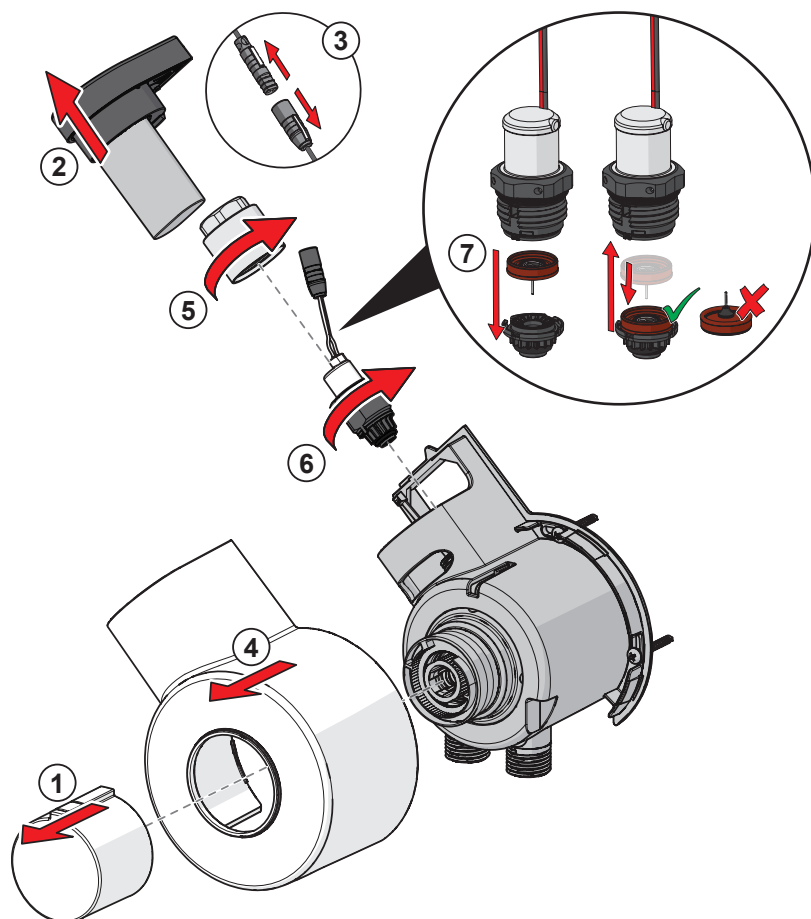





① ③









②



③

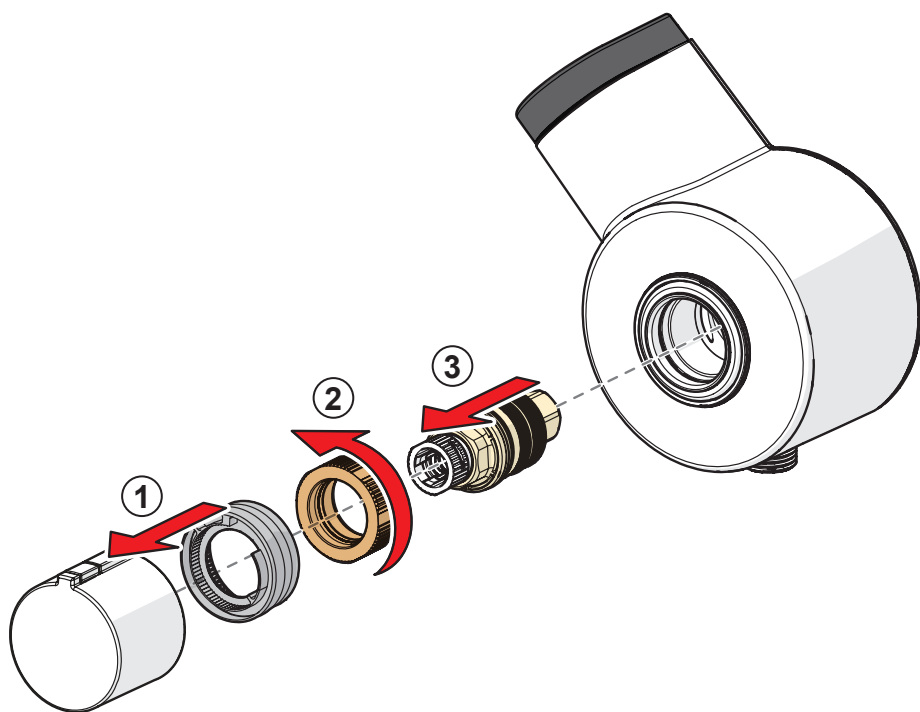

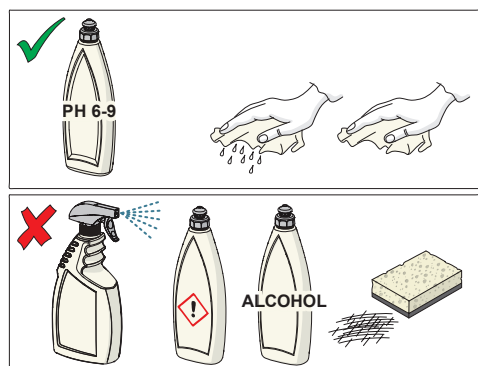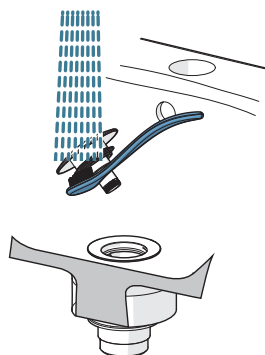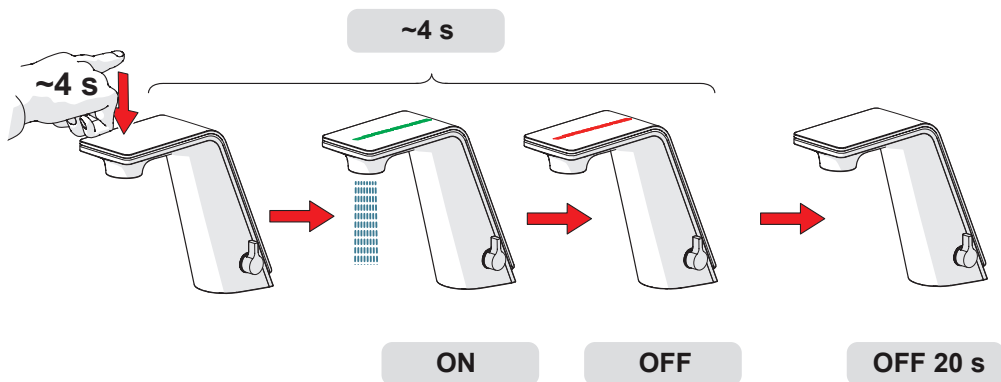

CLEANING.ORAS.COM

Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands: Oras and Hansa.

The Group's head office is located in Rauma, Finland, and the Group has three manufacturing sites: Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1,200 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.

ORAS Ltd
Isometsäntie 2, P.O. Box 40
FI-26101 Rauma
Tel. +358 2 83 161
Fax +358 2 831 6300
info.finland@oras.com
www.oras.com



943475-11-21