

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____


Tag _____

FD-200-L

Floor Drain with Square Heavy Duty Strainer

Specification

Watts FD-200-L on-grade epoxy coated cast iron floor drain with anchor flange, weepholes, adjustable square heel proof heavy duty nickel bronze strainer, and no hub (standard) outlet.

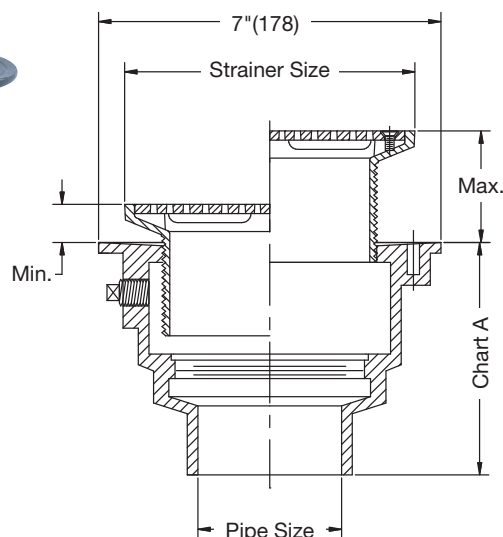

Pipe Sizing		
Suffix	Description	
2	2"(51) Pipe Size	☐
3	3"(76) Pipe Size	☐
4	4"(102) Pipe Size	☐

Outlet Type		
Suffix	Description	
NH	No Hub (MJ)	☐
P	Push On	☐
X	Inside Caulk	☐

Strainer		
Suffix	Description	
L5	5" x 5" Nickel Bronze	☐
L6	6" x 6" Nickel Bronze	☐
L8	8" x 8" Nickel Bronze	☐

Optional Body Material		
Suffix	Description	
-60	PVC Body w/Socket Outlet	☐
-61	ABS Body w/Socket Outlet	☐

Options		
Suffix	Description	
-5	Sediment Bucket	☐
-6	Vandal Proof	☐
-7	Trap Primer Tapping	☐
-8	Backwater Valve	☐
-9	Hinged Grate (For 6", 8" Str. Only)	☐
-13	Galvanized Body	☐
-15	Strainer Extension (DD-50)	☐
-F4-50	4" Round Cast Iron Funnel	☐
-F4-1	4" Round Nickel Bronze Funnel	☐
-F6-1	6" Round Nickel Bronze Funnel	☐
-G-50	4"x9" Oval Cast Iron Funnel	☐
-G-1	4"x9" Oval Nickel Bronze Funnel	☐

Chart A

Pipe Size	Std. No Hub	P Push On	60/61 PVC/ABS
2"(51)	4 1/2"(114)	5 1/2"(140)	4"(102)
3"(76)	4 1/2"(114)	5 1/2"(140)	4"(102)
4"(102)	4 3/4"(121)	5 1/2"(140)	4"(102)

Strainer Size

Strainer	Min.	Max.	Load Rating	Free Area Sq. In.
5" x 5"(127x127)	7/16"(11)	2 5/16"(59)	HD	9
6" x 6"(152x152)	5/8"(16)	2 5/16"(59)	HD	12
8" x 8"(203x203)	3/4"(19)	2 3/4"(70)	HD	26

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

NOTICE

The load classifications are in accordance with the American National Standard ASME A112.21.1M ASME Ratings are as follows:
HD Safe Live Load 5000-7499 lbs. (2250-3375 kg)
The above categories are given as a guide only.
Please consult factory.



USA: T: (800) 338-2581 • Watts.com

Canada: T: (888) 208-8927 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com

ES-WD-FD-200-L 2230

© 2022 Watts