



Wi-Fi Modem Self-Connect Guide

CGNM-2250




WESTMAN | COMMUNICATIONS GROUP



Wi-Fi Modem Self-Connect Guide

- Connect the supplied coaxial cable to the wall plate
- Connect the other end to the modem
- Ensure the connectors are as tight as you can possibly make them
- Plug in the supplied power cord to the modem
- Plug the other end of the power cord into the wall
- Lights should come on
- Wait 5 minutes. The lights should look like this

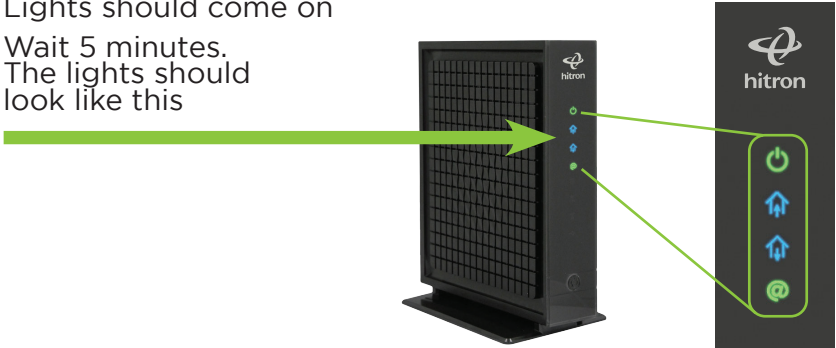

- Connect your cable (network) to your PC, if you need to, with the supplied Ethernet/Network Cable
- Search for the Wi-Fi connection, if applicable, which is labelled on the back of the modem (network name, SSID, etc)
- Insert the supplied password
- Test connectivity
- In a small number of cases, the modem may reboot after 15 minutes. This is normal, however, if the modem lights do not look the same as above, please call us
- If the lights look like this after 5 min try another outlet (location).



To watch an instructional video, please visit support.westmancom.com and search for “Self-Connect”.



WESTMAN | COMMUNICATIONS GROUP

204.725.4300

1.800.665.3337

westmancom.com

