


General Features

- * Heavy Duty Cast Aluminum Basket with Industrial Texture
- * High Flux Y30 Strontium Ferrite Magnet
- * High Impedance Aluminum Former with EISV Voice Coil
- * Poly Cotton Spider with Woven Round Tinsel Leads
- * Non-pressed Paper Cone with Pressed Foam Surround
- * Reinforced Fiberglass Woven Dust Cap for High Power Application
- * 10mm Top Plate

Specifications

T/S PARAMETERS		MGK124	
ELECTRO-ACOUSTIC		Parallel	Series
Fs	Hz	32.2	
Vas	Liters	35.7	
Qts		0.56	
no	%	0.17	
1-W SPL	dB	84.3	
2.83V SPL	dB	90.1	
MECHANICAL		Parallel	Series
Diameter	mm	250	
Sd	sq.m	0.0491	
Xmax	mm	15	
Xmech	mm	35	
Vd	Liters	3.43	
Qms		3.3	
Rms	Kg/s	14.4	
Mms	g	234.4	
Cms	mm/N	0.104	
ELECTRICAL		Parallel	Series
Re	Ohm	1.7	6.8
BL	Tm	11.3	21.8
Le	mH	0.96	0.92
Qes		0.675	
RMS Power	W	750	
MAX Power	W	1500	

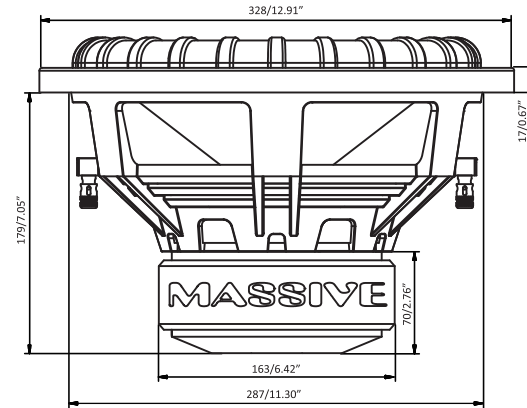

Mounting Depth	179 mm	7.05"
Mounting Diameter	328 mm	12.91"
Mounting cut diameter	287 mm	11.30"
Net weight	8.3 Kg	18.3 Lb
Displacment	0.00246 m3	0.087 Ft3

	External	Internal	Volume	Fb	Port round	Port Squar
Sealed	14" x 13" x 14"	1.04 ft3	0.94 ft3	46 Hz	N/A	N/A
Ported	14" x 18" x 14"	1.49 ft3	1.38 ft3	38 Hz	(2) 4"x10"	10"(L)12.5"x2"

1500
MAX WATTS



P.O. Box 252004 LOS ANGELES, CA 90025 U.S.A.
WWW.MASSIVEAUDIO.COM

MGK

Series

Subwoofers

