


2S1IP / 2S2IP - HOME IP56 SWITCH



SPECIFICATIONS

Rated Voltage	250V AC
Rated Frequency	50Hz
Rated Current	16A
Operational Temp.	-10°C to +40°C
IP Rating	IP56
Colour	White
Available Configurations	1G, 2G
Switch Arrangement	Single Pole / 2 Way
Mounting Orientation	Vertical Only

SAFETY

This product complies in full with AS/NZS 3133. This product should be installed by a suitably qualified person in accordance with Australian and New Zealand wiring rules.

WARRANTY

This product is covered by the standard 3 Year Vynco Warranty - proof of purchase is required. Please contact Vynco for details of returns procedure.

NOTE: This product contains NO user serviceable parts.

INSTALLATION PROCEDURE


NOTE: IP56 switches can only be mounted vertically (portrait orientation), and the switch mech must not be removed.

STEP 1

Ensure wall surface for mounting is smooth and flat and the hole cut does not exceed switch sub-plate seal perimeter size.

STEP 2

Remove the screw cap bungs (circled below) from the sub-plate seal with side cutters, cutting close to the bung itself. Store for later.

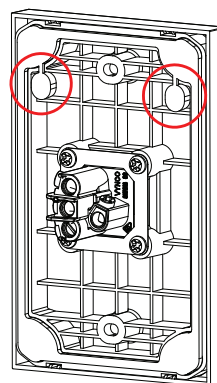

STEP 3

Wire up the switch in accordance with the AS/NZS 3000 Wiring Rules.

STEP 4

Screw the switch to the wall up to a torque of 1.3Nm for each screw (whether flush box mounting or solid wall mounting). In the case of solid wall mounting, piercing the seal flange is okay and recommended.

STEP 5

Fit the screw seal bungs in flush box screw holes. Fit cover plate.

VYNCO INDUSTRIES (NZ) LIMITED

CHRISTCHURCH

388 Tuam Street, Phillipstown, Christchurch, 8011
PO Box 9022, Tower Junction, Christchurch 8149
New Zealand
P +64 3 379 9283 F +64 3 379 6838
E sales@vynco.co.nz

VYNCO.CO.NZ

AUCKLAND

9 Levene Place, Mount Wellington
PO Box 12 249, Penrose, Auckland 1061
New Zealand
P +64 9 525 6051 F +64 9 525 5799

