

# Dual Fuel Range, 30", 5 Burners

Series 9 | Professional

Stainless Steel | LPG




Make a statement in less space, with this powerful gas burner range and spacious convection oven.

- Top burner heat of 19,000 BTU, for seriously fast boiling
- Convection oven with 4 cu ft total capacity
- Non-tip full-extension shelves for safe removal of hot dishes

## DIMENSIONS

|        |                  |
|--------|------------------|
| Height | 35 3/4 - 36 3/4" |
| Width  | 29 7/8"          |
| Depth  | 29 1/8"          |

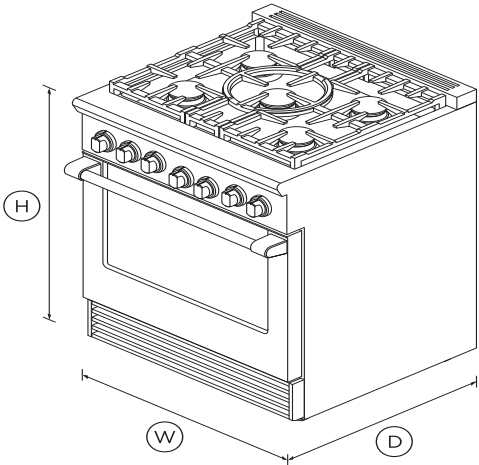

## FEATURES & BENEFITS

### Cooktop power

Sealed Dual Flow Burners™ deliver cooktop power up to 23,500 BTU (NG models) for seriously fast boiling right down to a precise 140°F full surface simmer with the gentlest of flames.

### Total control

Precise control across high and low settings is delivered through the halo-illuminated cooktop dials. The ovens have true convection and electronic oven control for precise and consistent temperatures.

### Consistent broiling

The Dual Fuel Range broiler provides an even heat that covers a very large surface area — perfect for browning a fully loaded oven tray.

### Easy to clean

The Dual Fuel Range oven has a self-cleaning function and removable side racks. The cooktop has sealed burners and an encapsulated cooking surface with a commercial-style stainless steel finish.

### Instant visibility

Control dials have halo-illumination glowing white – heating up; orange – temperature reached; red – self-cleaning mode. The oven is illuminated by two powerful incandescent lights.

### Cooking flexibility

The cooktop is designed for easy access to any burner with grates you can smoothly slide pots across, while the oven cavity is large enough to allow you to cook multiple dishes at once.

## SPECIFICATIONS

### Accessories

|                      |        |
|----------------------|--------|
| Square handle option | AH-R30 |
|----------------------|--------|

### Burner ratings

|                      |           |
|----------------------|-----------|
| Maximum burner power | 19000 BTU |
| Power back left      | 11500BTU  |
| Power back right     | 11500BTU  |
| Power centre         | 19000BTU  |
| Power front left     | 15000BTU  |
| Power front right    | 15000BTU  |
| Total cooktop power  | 72000 BTU |

### Capacity



|                       |    |
|-----------------------|----|
| Capacity total (AHAM) | 4L |
| Shelf positions       | 5  |
| Shelf positions       | 5  |

Cleaning

|                      |   |
|----------------------|---|
| Pyrolytic self-clean | • |
|----------------------|---|

Controls

|                         |        |
|-------------------------|--------|
| Electric circuit        | 4 wire |
| Metal illuminated dials | •      |

Gas Requirements

|                       |                          |
|-----------------------|--------------------------|
| Fitting and pipe      | ½ NPT, min. ⅝" flex line |
| Supply Pressure (LPG) | 11" to 14" W.C           |

Oven features

|                           |   |
|---------------------------|---|
| Broil pan                 | • |
| Concealed element         | • |
| Electronic oven control   | • |
| Full extension telescopic | • |
| Internal light            | • |
| True convection           | • |

Oven functions

|                     |   |
|---------------------|---|
| Bake                | • |
| Broil               | • |
| Clean               | • |
| Convection Broil    | • |
| Convection bake     | • |
| Number of functions | 6 |

|                 |   |
|-----------------|---|
| True convection | • |
|-----------------|---|

Oven performance

|                             |          |
|-----------------------------|----------|
| Bake power                  | 3500W    |
| Broil                       | 4000 BTU |
| Main oven - True convection | 2500W    |

Power requirements

|                  |      |
|------------------|------|
| Amperage         | 30A  |
| Rated current    | 30A  |
| Supply frequency | 60Hz |

Product dimensions

|        |                  |
|--------|------------------|
| Depth  | 29 1/8"          |
| Height | 35 3/4 - 36 3/4" |
| Width  | 29 7/8"          |

Rangetop features

|                           |   |
|---------------------------|---|
| Sealed Dual Flow Burners™ | 5 |
| Sealed range top          | • |
| Vent trim included        | • |

Recommended Back Guards Ventilation

|                           |                         |
|---------------------------|-------------------------|
| Combustible situation     | BGRV2-3030H             |
| Minimum CFM               | 600                     |
| Non combustible situation | BGRV2-3030 / BGRV2-1230 |
| Recommended hood          | HCB30-6_N (Professional |

Safety

|                           |   |
|---------------------------|---|
| Full extension telescopic | • |
|---------------------------|---|

|     |       |
|-----|-------|
| SKU | 71375 |
|-----|-------|

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. ? Fisher & Paykel Appliances Ltd 2020



---

Other product downloads available at [fisherpaykel.com](https://fisherpaykel.com)



User Guide



Service & Warranty



Installation Guide



Data Sheet Dual Fuel Range



Planning Guide



**A PEACE OF MIND SALE**

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 W [www.fisherpaykel.com](https://www.fisherpaykel.com)

