




3. Disconnect the battery cable to the three flexible cables on the screen



Use the spudger to pry open the flexible cable in the order of "abcd".

INSTALLATION STEPS

1. Tear off the back film and install the home button

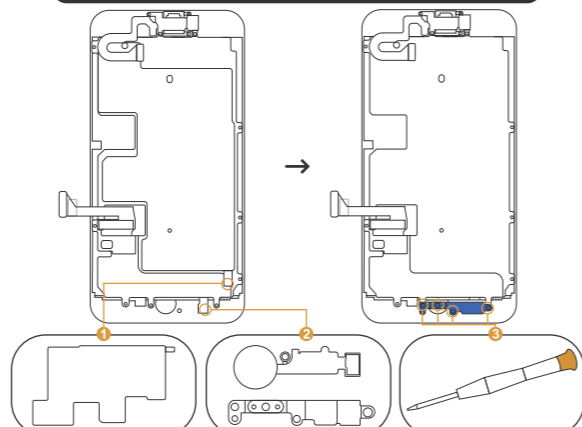


Tear off the protective backing film of the new screen.

Attach the home button first, connect the flexible cable. Attach the panel.



Use the yellow screwdriver to tighten these four screws.

3. Connect the battery cable and the three flexible cables on the new screen

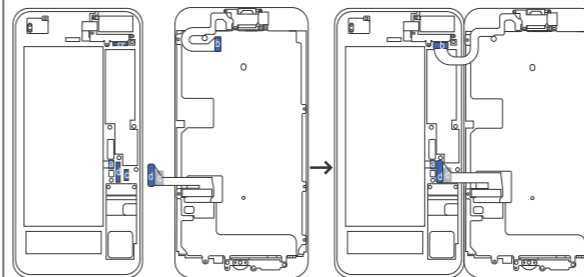


Connect the earpiece cable and battery cable according to the position shown in "abcd".


5. Tighten the screw to fix the panel



Attach the panel.




Use the yellow screwdriver to tighten these two screws.



Use the red screwdriver to tighten these four screws.

4. Remove home button

There may be glue on the home button, be careful not to break the home button cable

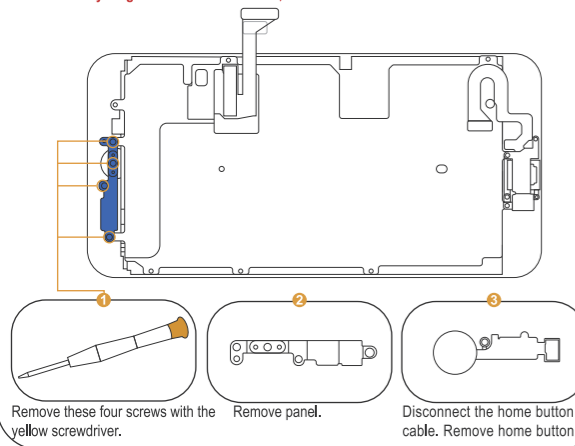


Remove these four screws with the yellow screwdriver.

Remove panel.

Disconnect the home button cable. Remove home button.


2. Attach waterproof adhesive

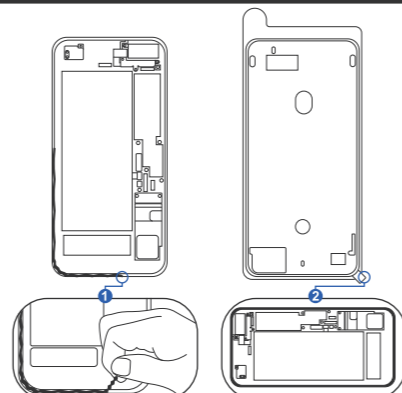

Clean up residual adhesive.


Attach the new waterproof adhesive (be careful not to reverse it). Press the waterproof adhesive along the surrounding frame and tear off the outer blue protective touch.

4. Test image display and touch

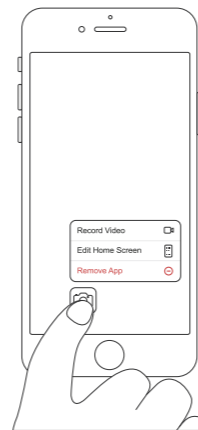

The image is displayed normally. Touch works normally.


6. Screen installation completed

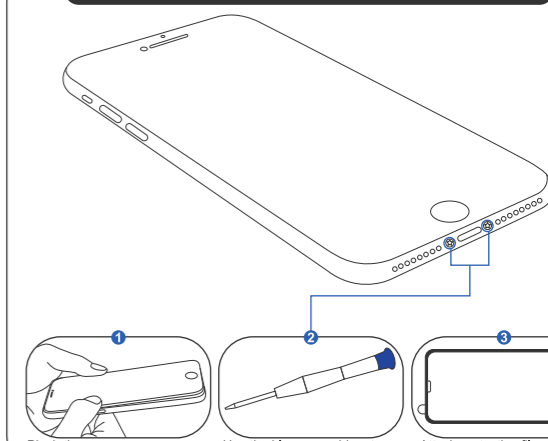

Pinch the screen.

Use the blue screwdriver to tighten these two screws.

Attach protective film

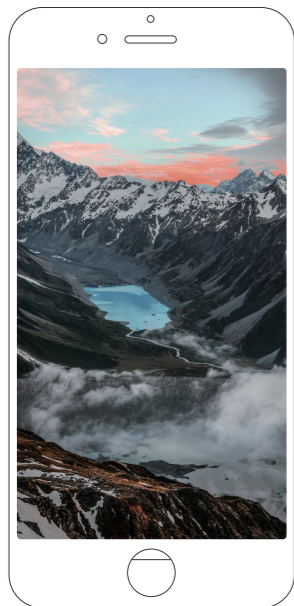

For iPhone 8P LCD full assembly with camera

USER MANUAL

Thank you for purchasing our products! If our products are helpful to you, we would appreciate your sharing your experience below our products. Thanks again!




After-sales customer service: service@e-faith.cn

TOOL INTRODUCTION



- 1 Pentalobe screwdriver
- 2 Y-shaped screwdriver
- 3 Phillips screwdriver
- 4 Spudger
- 5 Triangle
- 6 Sucker and sim card pin
- 7 Waterproof adhesive
- 8 Magnetic screw mat

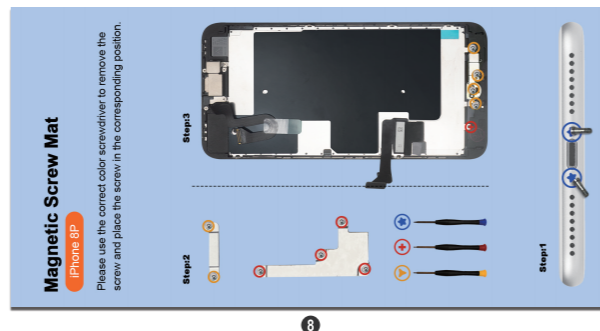

The role of magnetic screw mat

The magnetic screw mat has a magnetic adsorption effect to prevent the screw parts from being lost. When replacing the screen of the mobile phone, place the screw parts on the magnetic screw mat according to the corresponding position to avoid wrong installation and cause the phone to black screen.

PRECAUTIONS

Please read this manual carefully before using this product

⚠ There is a possibility of personal injury and property damage when used incorrectly

1. It is best to ask professionals to install, our instructions are for reference only.
2. Before replacing the screen, you can use a hair dryer to blow the edge of the screen to facilitate the separation of the screen with a suction cup.
3. Please keep your phone power off and disconnect the battery cable when assembling.
4. There are different size and length screws when you replace your iPhone display assembly, please use magnetic screw mat to mark, each screw and put them in the original place [**VERY IMPORTANT**] otherwise the screen will be easy broken if you put the screw in the wrong place.
5. Check the screen replacement to make sure the flexible cable in good condition and no debris / visible dust on the connector.

Pressing strongly on the LCD causes damage


Tear off the protective film when installing

Screen and flex cable connection

Pulling flex cable will cause black screen and no display


Installing four corners of the LCD carefully

Screws installed incorrectly or too tightly will penetrate the screen and cause malfunctions

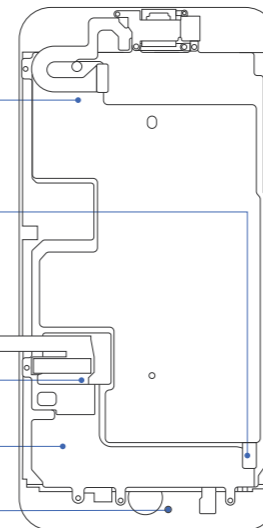

DISASSEMBLY STEPS

1.Split screen

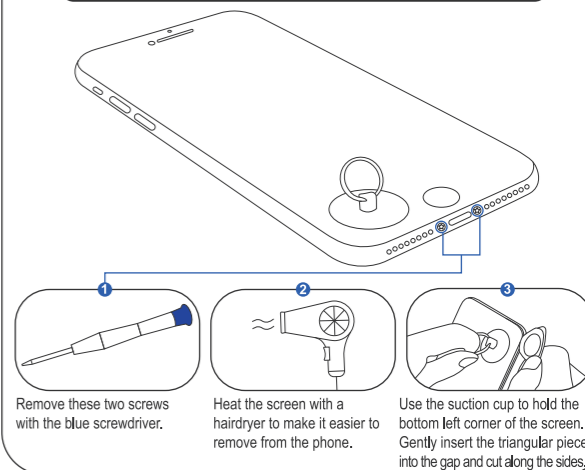

2.Remove panel

