



OPERATOR MANUAL

IMPORTANT INFORMATION, KEEP FOR OPERATOR

2016 Gees Mill Road, Suite 200, Conyers, GA 30013
888-994-7636, fax 888-864-7636
unifiedbrands.net



THIS MANUAL MUST BE RETAINED FOR FUTURE REFERENCE. READ, UNDERSTAND AND FOLLOW THE INSTRUCTIONS AND WARNINGS CONTAINED IN THIS MANUAL.

FOR YOUR SAFETY Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

WARNING R290 flammable refrigerant in use. Improper installation, adjustment, alteration, service or maintenance can cause property damage, injury or death. Read the installation, operating and maintenance instructions thoroughly before installing or servicing this equipment.

NOTIFY CARRIER OF DAMAGE AT ONCE It is the responsibility of the consignee to inspect the container upon receipt of same and to determine the possibility of any damage, including concealed damage. Unified Brands suggests that if you are suspicious of damage to make a notation on the delivery receipt. It will be the responsibility of the consignee to file a claim with the carrier. We recommend that you do so at once.

Manufacture Service/Questions 888-994-7636.

This manual provides information for:

PT-W-L SERIES PREP TABLES



RETAIN THIS MANUAL FOR FUTURE REFERENCE

NOTICE: Due to a continuous program of product improvement, Unified Brands reserves the right to make changes in design and specifications without prior notice.

NOTICE: Please read the entire manual carefully before installation. If certain recommended procedures are not followed, warranty claims will be denied.

MODEL NUMBER _____

SERIAL NUMBER _____

INSTALLATION DATE _____

The serial number is located in the cabinet left side or back wall closest to the compressor compartment under the drawer track. An example is shown here.



SERIAL NUMBER XXXXXXXXX
MODEL NUMBER XXXXXXXXX
DESCRIPTION

EQUIPMENT DESCRIPTION

MODEL	LENGTH	DEPTH		HEIGHT		PAN CAPACITY 1/6 SIZE	DOORS	STORAGE CU. FT.	HP	VOLT/ CYCLE/ PHASE	AMPS	NEMA PLUG	SHIP WT.
		UNIT	OVERALL WITH CUTTING BOARD	WORK SURFACE	OVERALL COVER OPEN								
PT48-18W-L	48"	33"	36.125"	34.75"	49"	18	(2) 18"	10.1	1/5	115/60/1	3.5	5-15P	411
PT60-24W-L	60"	33"	36.125"	34.75"	49"	24	(1) 21", (1) 27"	14.7	1/4	115/60/1	3.5	5-15P	456
PT72-30W-L	72"	33"	36.125"	34.75"	49"	30	(2) 27"	19.2	1/4	115/60/1	3.5	5-15P	502
PT84-36W-L	84"	33"	36.125"	34.75"	49"	36	(1) 18", (2) 27"	24.15	1/4	115/60/1	3.5	5-15P	565



Information contained in this document is known to be current and accurate at the time of printing/creation. Unified Brands recommends referencing our product line websites, unifiedbrands.net, for the most updated product information and specifications. © 2018 Unified Brands. All Rights Reserved. Unified Brands is a wholly-owned subsidiary of Dover Corporation.

IMPORTANT - READ FIRST - IMPORTANT

INTERIOR EVAPORATOR COVER

 DANGER RISK OF FIRE OR EXPLOSION. FLAMMABLE REFRIGERANT USED. DO NOT USE MECHANICAL DEVICES TO DEFROST REFRIGERATOR. DO NOT PUNCTURE REFRIGERANT TUBING. RIESGO DE INCENDIO O EXPLOSIÓN. REFRIGERANTE INFLAMMABLE UTILIZADO. NO UTILICE DISPOSITIVOS MECÁNICOS PARA DESCONGELAR EL REFRIGERADOR. NO PERFORE LA TUBERÍA DEL REFRIGERANTE. PP LBL1701 REV B	RISQUE D'INCENDIE OU D'EXPLOSION. INFLAMMABLE REFRIGERANT UTILISÉ. NE PAS UTILISER DE DISPOSITIFS MÉCANIQUES POUR DÉGIVRER LE RÉFRIGÉRATEUR. NE FAIRE AUCUN TUBE RÉFRIGÉRANT DE PUNCTON. SEN 1.2	WARNING  ALERTE DO NOT REMOVE PANEL - HIGH VOLTAGE - QUALIFIED PERSONNEL ONLY NE PAS RETIRER LE PANNEAU - HAUTE TENSION - PERSONNEL QUALIFIÉ SEULEMENT NO RETIRE EL PANEL - ALTA TENSION - CALIFICADO PERSONAL CAUTION  ATENCIÓN MOVING PARTS. DO NOT OPERATE WITH COVER REMOVED PIÈCES MOBILES NE PAS FAIRE FONCTIONNER SANS COUVERCLE LAS PIEZAS DE MOVIMIENTO NO FUNCIONAN CON LA CUBIERTA RETIRADA
--	---	---

EXTERIOR OF UNIT

 CAUTION RISK OF FIRE OR EXPLOSION. DISPOSE OF PROPERLY IN ACCORDANCE WITH FEDERAL OR LOCAL REGULATIONS. FLAMMABLE REFRIGERANT USED. PRECAUCIÓN RIESGO DE INCENDIO O EXPLOSIÓN. DESECHALO ADECUADAMENTE CONFORME A REGLAMENTOS FEDERALES O LOCALES. REFRIGERANTE INFLAMMABLE UTILIZADO. PP LBL1704 REV B	MISE EN GARDE RISQUE D'INCENDIE OU D'EXPLOSION. ÉLIMINER (or DISPOSER) CORRECTEMENT CONFORMÉMENT AUX RÉGLEMENTATIONS FÉDÉRALES OU LOCALES. REFRIGÉRANT INFLAMMABLE UTILISÉ. PP LBL1704 REV B
--	---

NEAR EXPOSED REFRIGERANT TUBING

 CAUTION RISK OF FIRE OR EXPLOSION DUE TO PUNCTURE OF REFRIGERANT TUBING; FOLLOW HANDLING INSTRUCTIONS CAREFULLY. FLAMMABLE REFRIGERANT USED. PRECAUCIÓN RIESGO DE INCENDIO O EXPLOSIÓN DEBIDO A LA PERFORACIÓN DE LA TUBERÍA DE REFRIGERANTE. SIGA CUIDADOSAMENTE LAS INSTRUCCIONES DE MANEJO. REFRIGERANTE INFLAMMABLE UTILIZADO. SEN 1.5 PP LBL1705 REV B	MISE EN GARDE RISQUE D'INCENDIE OU D'EXPLOSION EN RAISON DE LA PERFORATION DU TUBE REFRIGÉRANT. SURVEZ ATTENTIVEMENT LES INSTRUCTIONS DE MANIPULATION. REFRIGÉRANT INFLAMMABLE UTILISÉ.
--	--

NEAR MACHINE COMPARTMENT AND NAMEPLATE

 DANGER RISK OF FIRE OR EXPLOSION. FLAMMABLE REFRIGERANT USED. TO BE REPAIRED ONLY BY TRAINED SERVICE PERSONNEL. DO NOT PUNCTURE REFRIGERANT TUBING. PELIGRO RIESGO DE INCENDIO O EXPLOSIÓN. REFRIGERANTE INFLAMMABLE UTILIZADO. DEBE SER REPARADO SOLAMENTE POR PERSONAL DE SERVICIO CAPACITADO. NO PERFORE LA TUBERÍA DEL REFRIGERANTE. SEN 1.3.2	DANGER RISQUE D'INCENDIE OU D'EXPLOSION. REFRIGÉRANT INFLAMMABLE UTILISÉ. POUR ÊTRE RÉPARÉ QUE PAR UN TECHNICIEN QUALIFIÉ. NE PAS PERFORER LE TUBE REFRIGÉRANT.
 CAUTION RISK OF FIRE OR EXPLOSION. FLAMMABLE REFRIGERANT USED. CONSULT REPAIR MANUAL / OWNER'S GUIDE BEFORE ATTEMPTING TO INSTALL OR SERVICE THIS PRODUCT. ALL SAFETY PRECAUTIONS MUST BE FOLLOWED. PRECAUCIÓN RIESGO DE INCENDIO O EXPLOSIÓN. REFRIGERANTE INFLAMMABLE UTILIZADO. CONSULTE EL MANUAL DE REPARACIÓN / MANUAL DEL USUARIO ANTES DE INSTALAR O REPARAR ESTE PRODUCTO. DEBEN SEGUIRSE LAS PRECAUCIONES DE SEGURIDAD. PP LBL1703 REV B	MISE EN GARDE RISQUE D'INCENDIE OU D'EXPLOSION. REFRIGÉRANT INFLAMMABLE UTILISÉ. CONSULTER LE MANUEL DE RÉPARATION / GUIDE DE L'UTILISATEUR AVANT D'ESSAYER D'INSTALLER OU DE RÉPARER CE PRODUIT. TOUTES LES PRÉCAUTIONS DOIVENT ÊTRE RESPECTÉES. PP LBL1703 REV B

INSTALLATION

- CAUTION:** THIS UNIT CONTAINS R290 FLAMMABLE REFRIGERANT. USE CAUTION WHEN HANDLING MOVING AND USE OF THE REFRIGERATOR OR FREEZER. AVOID DAMAGING THE REFRIGERANT TUBING OR INCREASE THE RISK OF A LEAK.
- WARNING:** FAILURE TO FOLLOW INSTALLATION GUIDELINES AND RECOMMENDATIONS MAY VOID THE WARRANTY ON YOUR UNIT.
- WARNING:** IT IS IMPORTANT THAT YOUR UNIT HAS ITS OWN DEDICATED LINE. CONDENSING UNITS ARE DESIGNED TO OPERATE WITH A VOLTAGE FLUCTUATION OF PLUS OR MINUS 10% OF THE VOLTAGE INDICATED ON THE UNIT DATA TAG. BURN OUT OF A CONDENSING UNIT DUE TO EXCEEDING VOLTAGE LIMITS WILL VOID THE WARRANTY.
- THE CAREL CONTROLLER HAS LOW VOLTAGE PROTECTION AND WILL NOT OUTPUT VOLTAGE TO THE COMPRESSOR IF VOLTAGE IS LESS THAN 104V.**
- WARNING:** IT IS IMPORTANT THAT A VOLTAGE READING BE MADE AT THE COMPRESSOR MOTOR ELECTRICAL CONNECTIONS, WHILE THE UNIT IS IN OPERATION TO VERIFY THE CORRECT VOLTAGE REQUIRED BY THE COMPRESSOR IS BEING SUPPLIED. LOW OR HIGH VOLTAGE CAN DETRIMENTALLY AFFECT OPERATION AND THEREBY VOID ITS WARRANTY.
- WARNING:** EVAPORATOR FANS RUN CONTINUOUSLY WHILE THE BASE IS POWERED ON.
- WARNING:** THIS UNIT IS INTENDED FOR USE IN LABORATORIES IN COMMERCIAL, INDUSTRIAL, OR INSTITUTIONAL OCCUPANCIES AS DEFINED IN THE SAFETY STANDARD FOR REFRIGERATION SYSTEMS, ASHRAE 15.

SELECTING A LOCATION FOR YOUR NEW UNIT

The following conditions should be considered when selecting a location for your unit:

- Floor Load:** The area on which the unit will rest must be level, free of vibration, and suitably strong enough to support the combined weights of the unit plus the maximum product load weight. All casters must be in contact with the floor to support the weight. Casters may require shims in order for the caster to be in contact with the floor. NOTE: If there is a question pertaining to weight load limits, consult the factory at 1-888-994-7636.
- Clearances:** Unit shall have a clearance of 0 inches at the top, 0 inches at the rear and 0 inches at each side.
- Ventilation:** The air cooled self contained unit requires a sufficient amount of cool clean air. Avoid surrounding your unit around other heat generating equipment and out of direct sunlight. Also, avoid locating in an unheated room or where the room temperature may drop below 70° F (21°C) or above 86°F (32°C). Do not place any object that can block the ventilation exhaust from the machine compartment register.

INSTALLATION CHECKLIST

After the final location has been determined, refer to the following checklist prior to start-up:

- Check all exposed refrigeration lines to ensure that they are not kinked, dented, or rubbing together or rubbing against any steel.
- Check all visible components for any potential damage.
- Check that the condenser and evaporator fans rotate freely without striking any stationary members.
- Unit must be properly leveled; Check all legs or casters ensure they all are in contact with the floor while maintaining a level work surface. Adjusting bullet feet height or shimming casters may be necessary if the floor is not level. NOTE: Damage to equipment may result if not followed. Unified Brands is not responsible for damage to equipment if improperly installed.
- Plug unit into power source. Unit will come on. If unit does not turn on, refer to controller operation section of this manual to manually turn on the unit.
- Allow unit time to cool down to holding temperature. If temperature adjustments are required, the control is located on the front panel. Confirm that the units is holding the desired temperature.
- If unit has drawers, check drawer to ensure the drawer slides freely and fully extents along with seating in the cabinet properly when closed.
- Refer to the front of this manual for serial number location. Please record this information in your manual on page 1 now. It will be necessary when ordering replacement parts or requesting warranty service.
- Allow your unit to operate for approximately 45 minutes before putting in food in the rail. Allow 2 hours for base of the unit to cool down to storage temperature, prior to loading product. NOTE: All motors are oiled and sealed.

ELECTRICAL SUPPLY

The wiring should be done by a qualified electrician in accordance with local electrical codes. A properly wired and grounded outlet will assure proper operation. Please consult the data tag attached to the compressor to ascertain the correct electrical requirements. Supply voltage and amperage requirements are located on the serial number tag.

OPTIONAL BULLET-FEET ADJUSTMENT

The legs are equipped with bullet-type leveling bolts. Turn bolts clockwise or counterclockwise until the unit is level (both right to left and front to back). This can be done by hand or with an open end wrench.

OPERATION

AMBIENT CONDITIONS

Unit is designed for normal operating temperatures between 70° F (21°C) - 86° F (32°C). Operating outside of those temperatures may cause premature product wear or failure.

Unified Brands has attempted to preset the temperature control to ensure that your unit runs at an optimum temperature, but due to varying ambient conditions, including elevation, food type and your type of operation, you may need to alter this temperature using control adjustment until desired temperature is reached.

Condiments pans will maintain proper temperatures when utilized properly. It is strongly recommended that standard hooded roll covers be kept in the closed position when the unit is not in used and between rush periods. It is also required that the standard hood covers remain on the unit at all times to maintain proper product temperatures. This is especially important in the summer and in kitchens exceeding 80°F (26.7°C). Do not leave the covers open for prolonged periods. All individual condiment pans need to be in the rail at all times. NOTE: If no product is available nor necessary, fill empty pans with 1 to 2 inches of water as an insulating barrier.

MECHANICAL COMPARTMENT

1. To power on the unit, press and hold the controller power button until the LED display turns on.
2. To power off the unit, press and hold the controller power button until the LED Display turns off.

CAREL CONTROLLER OPERATION

LED	FUNCTION
	Compressor energized
	Defrost in progress
	Evaporator fan energized
	An alarm is occurring



POWER ON / OFF: Press and hold the Power Button  for more than 3 seconds or until LED display turns On/Off.

MANUAL DEFROST: Press and hold the Defrost Button  for more than 3 seconds (melting snowflake will light).

CHANGE SET POINT: To raise temperature



1. Press and hold  button for 1 second to access set point.
2. When set point starts flashing, press up button  to adjust set point.
3. Press  button for 3-seconds to save set point.

CHANGE SET POINT: To lower temperature

1. Press and hold  button for 1 second to access set point.
2. When set point starts flashing, press down button  to adjust set point.
3. Press  button for 3-seconds to save set point.

OPTIONAL DRAWER: REMOVAL (IF APPLICABLE)

1. Fully extend the drawer that is to be removed.
2. Remove product pans from drawer.
3. Lift up the drawer stop tabs on each side of drawer track.
4. Pull drawer out while lifting the tabs.

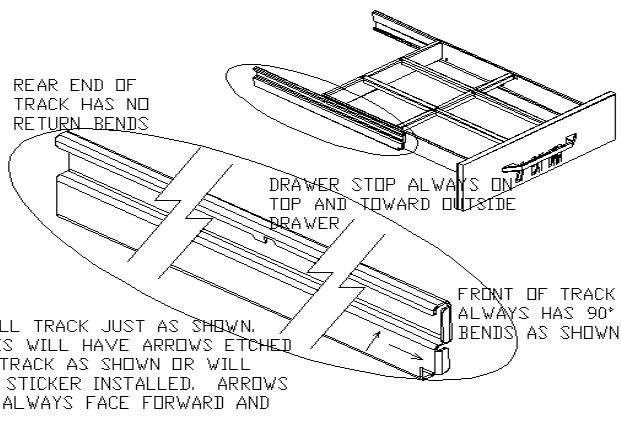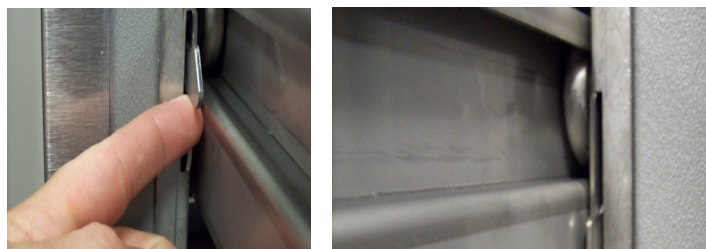

OPTIONAL DRAWER: INSTALLATION (IF APPLICABLE)

To remove and re-install individual drawers and drawer tracks, please refer to the figure above for proper installation instructions.

MAINTENANCE

WARNING: DO NOT USE SHARP UTENSILS AND/OR OBJECTS.

WARNING: DO NOT USE STEEL PADS, WIRE BRUSHES, SCRAPERS, OR CHLORIDE CLEANERS TO CLEAN YOUR STAINLESS STEEL.

CAUTION: DO NOT USE ABRASIVE CLEANING SOLVENTS, AND NEVER USE HYDROCHLORIC ACID (MURIATIC ACID) ON STAINLESS STEEL.

WARNING: DO NOT PRESSURE WASH EQUIPMENT AS DAMAGE TO ELECTRICAL COMPONENTS MAY RESULT.

Unified Brands strongly suggests a preventive maintenance program which would include the following monthly, weekly, and daily procedures:

If a failure of the equipment is a direct result of any of the Preventative Maintenance guidelines being neglected, the repairs and parts replacements will not be covered under warranty.

It is recommended that the customer contact the local Authorized Service Agent to provide a quote to perform periodic Preventative Maintenance.

WEEKLY PM PROCEDURES

1. Clean all gaskets on a weekly if not daily basis with a solution of warm water and a mild detergent to extend gasket life. Do not use bleach for cleaning gaskets. Bleach will cause the gaskets to become brittle and not reach their normal life expectancy.

MONTHLY PM PROCEDURES

1. Cleaning of all condenser coils. Condenser coils are a critical component in the life of the compressor and must remain clean to assure proper air flow and heat transfer. Failure to maintain this heat transfer will affect unit performance and eventually destroy the compressor. Clean the condenser coils with coil cleaner and/or a vacuum cleaner and brush. NOTE: Brush coil in direction of fins, normally vertically as to not damage or restrict air from passing through condenser.
2. Clean fan blades on the condensing unit and evaporator assembly.
3. Clean and disinfect drain lines and evaporator pan with a solution of warm water and mild detergent.
4. Clean all gaskets on a weekly if not daily basis with a solution of warm water and a mild detergent to extend gasket life.
5. Lubricate door hinges with lithium grease.

RECOMMENDED CLEANERS FOR YOUR STAINLESS STEEL INCLUDE THE FOLLOWING:

JOB	CLEANING AGENT	COMMENTS
Routine cleaning	Soap, ammonia, detergent Medallion	Apply with a sponge or cloth
Fingerprints and smears	Arcal 20, Lac-O-Nu, Ecoshine	Provides a barrier film
Stubborn stains and discoloration	Cameo, Talc, Zud, First Impression	Rub in the direction of the polish lines
Greasy and fatty acids, blood, burnt-on foods	Easy-Off, Degrease It, Oven Aid	Excellent removal on all finishes
Grease and Oil	Any good commercial detergent	Apply with a sponge or cloth
Restoration/Preservation	Benefit, Super Sheen	Good idea monthly

Reference: Nickel Development Institute, Diversey Lever, Savin, Ecolab, NAFEM

Proper maintenance of equipment is the ultimate necessity in preventing costly repairs. By evaluating each unit on a regular schedule, you can often catch and repair minor problems before they completely disable the unit and become burdensome on your entire operation.

For more information on preventive maintenance, consult your local service company or CFESA member. Most repair companies offer this service at very reasonable rates to allow you the time you need to run your business along with the peace of mind that all your equipment will last throughout its expected life. These services often offer guarantees as well as the flexibility in scheduling or maintenance for your convenience. For a complete listing of current Unified Brands ASA please visit www.unifiedbrands.net.

Unified Brands believes strongly in the products it manufactures and backs those products with one of the best warranties in the industry. We believe with the proper maintenance and use, you will realize a profitable return on your investment and years of satisfied service.

REPLACEMENT PARTS

To order parts, contact your Authorized Service Agent. Supply the model designation, serial number, part description, part number, quantity, and when applicable, voltage and phase.

CONTACT US

If you have questions pertaining to the content in this manual, contact Unified Brands at 888-994-7636 or tsrandell@unifiedbrands.net.

TROUBLESHOOTING

This unit is designed to operate smoothly and efficiently if properly maintained. However, the following is a list of checks to make in the event of a problem. Wiring diagrams are found at the end of this manual. When in doubt, turn unit off and contact service at 888-994-7636 or tsrandell@unifiedbrands.net.

SYMPTOM	POSSIBLE CAUSE	PROCEDURE
Unit does not run	No power to unit	Plug in unit
	Control in OFF position	Turn controller on
	Faulty control	Call for service at 888-994-7636
Unit too cold	Incorrect set point	Adjust control set point
Unit too warm	Roll cover is open	Close roll cover
	Gasket torn or out of place	Inspect the gasket for wear and position
	Incorrect set point	Adjust control set point
	Warm product introduced to cabinet	Pre-chill product 37°F
	Ice on the coil	Initiate manual defrost
Unit noisy	Ice on the coil	Initiate manual defrost
Unit does not defrost	Excessive ice on the coil	Initiate manual defrost

CAREL CONTROLLER CODES

DISPLAYED ALARM CODE	ALARM
E0	Control probe
E1	Defrost probe
dOr	Open door
LO	Low temperature
HI	High temperature
CHt	Dirty condenser

CLEANING CONDENSER COIL

An accumulation of dirt and dust prevents the condenser coil from removing, making your unit cool poorly, run constantly, or even stop completely if the compressor overheats. Clean coil using a vacuum cleaner with wand attachment. If the coil is greasy, wash it with a solution of warm water the mild detergent using a bristle brush. Take care not to drip water onto other parts of the condensing unit.

CLEANING DRAIN AND DRAIN PAN

Clean the drain using an oven baster to force a solution of hot water and baking soda or bleach into the drain opening. To clear a stubborn clog, insert a length of 1/4" round plastic tubing into the drain and push it gently through to the drain pan; pull back out. Wash the drain pan regularly with a solution of warm water and baking soda.

CHECKING THE DOOR SEAL

Open the door and examine all four sides of the door gasket for any tears. Feel the gasket for brittleness and/or cracks. If the gasket shows damage, then it must be replaced. If no damage is observed, close the door and check the seal between the gasket and the cabinet for obvious gaps. Next open the door and close it on a dollar bill. Slowly pull the dollar bill out from the door. If the gasket seals properly,



you will feel tension as it grips the bill. Repeat this test all around the door. If the gasket does not seal tightly, replace the gasket after first checking the door for any sagging or warping.

SERVICE

CAUTION: COMPONENT PARTS SHALL BE REPLACED WITH FACTORY OEM PARTS. SERVICE WORK SHALL BE DONE BY FACTORY AUTHORIZED SERVICE PERSONNEL, SO AS TO MINIMIZE THE RISK OF POSSIBLE IGNITION DUE TO INCORRECT PARTS OR IMPROPER SERVICE.

CAUTION: BEFORE MAKING ANY REPAIRS, ENSURE THE UNIT IS DISCONNECTED FROM ITS POWER SOURCE.

This piece of equipment uses a R290 Refrigeration system. This equipment has been clearly marked on the serial tag the type of refrigerant that is being used. There is also a warning labels stating that the unit contains R290 refrigerant. R290 is safe to use as long as you follow these warning labels.

No smoking or open flames when servicing this equipment. If needed, use a CO2 or powder type fire extinguisher.

Replacement parts used on any R290 Refrigeration system cabinet must have specific UL certification for non-sparking components.

Only authorized service technician, certified in R290 system should service this equipment.

MANIFOLD SET

A R134A manifold set can be used for servicing this equipment.

REFRIGERANT RECOVERY

Follow all national and local regulations for R-290 refrigerant recovery.

LEAKING CHECKING AND REPAIR

Leak check an R-290 system the same way you would an R-134a or R-404A system with the following exceptions.

1. Do not use a Halid leak detector on a R290 system.
2. Electronic leak detector must be designated specifically for combustible gas.

Use of a bubble solution or an ultrasonic leak detector are acceptable.

When repairing a leak, it is recommended using oxygen free dry nitrogen with a trace gas not exceeding 200PSI.

When accessing an R290 system, piercing valves are not to remain on the equipment in a permanent manner. After charge is recovered, Schrader valves are to be installed on the process stubs. Proper charge is to be weighed into the system and the system is to be leak checked afterwards.

The R290 equipment must have red process tubes and other devices through which the refrigerant is serviced, such as any service port. This color marking must remain on the equipment. If marking is removed, it must be replace and extend at least 2.5 centimeters (1") from the compressor.

CHARGING

Follow the charge amount specified on the data tag. It is recommended to use the shortest hoses possible to prevent undercharging.

- Ensure the system is sealed and leak checked
- Evacuate system to a minimum 500 micron
- Weigh in correct charge
- Leak check the system again
- Bleed the refrigerant from the high side hose to the low side hose
- Disconnect the hoses
- Remove line taps

WARRANTY

Congratulations on the purchase of your new Unified Brands equipment. We hope you enjoy many years of reliable service in connection with the same. Please review all of the important safety and operational information contained in the Operator's Manual for this equipment before it is placed in service. If you have any questions related to equipment set up, operations, or service, please call 888-994-7636.

In addition, please review the sales terms and conditions set forth below.

*****IMPORTANT NOTICE*****

WARRANTIES, LIMITATIONS ON WARRANTIES, AND LIMITATION OF REMEDIES

The following Warranties, Limitation on Warranties, and Limitation of Remedies are included in the terms of sale for this product. Please read this entire warranty and all warranty modifications, disclaimers, and limitations of remedies set forth herein before accepting or using this equipment or product. Customer acknowledges and accepts the provisions of this notice by Customer's acceptance and use of the product. If these provisions are not acceptable and agreed to by Customer, then please return this product in its unused condition to Unified Brands or a Unified Brands authorized dealer.

UNIFIED BRANDS warrants this product against defects in material and workmanship under normal use and services for which this product was designed. This warranty runs only to the original end user and is in lieu of any other liability for defects. THE WARRANTIES EXPRESSED IN THESE TERMS AND CONDITIONS ARE IN PLACE OF ANY AND ALL OTHER EXPRESS WARRANTIES (UNLESS SEPARATELY STATED IN PRINTED MATERIAL PREPARED BY US DESCRIBING OUR EQUIPMENT) AND EXCLUDE ALL IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE; NOR ARE THERE ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, BY OPERATION OF LAW OR OTHERWISE. In no event shall UNIFIED BRANDS be liable for damages or delay or for any consequential, special or contingent damages arising out of any breach of our warranty, whether or not we have knowledge of specific needs or our employees or agents have given any specific assurances. Anyone claiming that there has been a breach of warranty by UNIFIED BRANDS must give us written notice within THIRTY (30) days after discovery of the relevant defect or the right to assert such claim will have been waived conclusively and provided further that any such claim must also be asserted within the general warranty period for such equipment and/or parts.

UNIFIED BRANDS will not be liable for any expense incurred without our prior written authorization for alterations made outside of our factory or for repairs which are not performed by UNIFIED BRANDS authorized service departments using UNIFIED BRANDS factory parts. Nor shall we be responsible for the performance of equipment as to which any repairs, revisions or alterations have been made by others.

THE EXCLUSIVE REMEDY OF THE USER OR BUYER AND THE EXCLUSIVE LIABILITY OF UNIFIED BRANDS OR ANY SELLER OF UNIFIED BRANDS PRODUCTS, FOR ANY AND ALL CLAIMS, LOSSES, INJURIES, OR DAMAGES (INCLUDING CLAIMS BASED ON BREACH OF WARRANTY, CONTRACT, NEGLIGENCE, TORT, STRICT LIABILITY, OR OTHERWISE) RESULTING FROM OR ARISING OUT OF THE USE OF HANDLING OF THIS PRODUCT, SHALL BE THE RETURN OF THE PURCHASE PRICE OR AN AMOUNT NOT TO EXCEED THE ORIGINAL PURCHASE PRICE OF THE PRODUCT OR, AT THE ELECTION OF UNIFIED BRANDS OR THE SELLER, THE REPLACEMENT OF THE PRODUCT.




<https://unifiedbrands.net/Randell-Warranty-Information>


DOOR

Parts List


LEFT HINGED DOOR

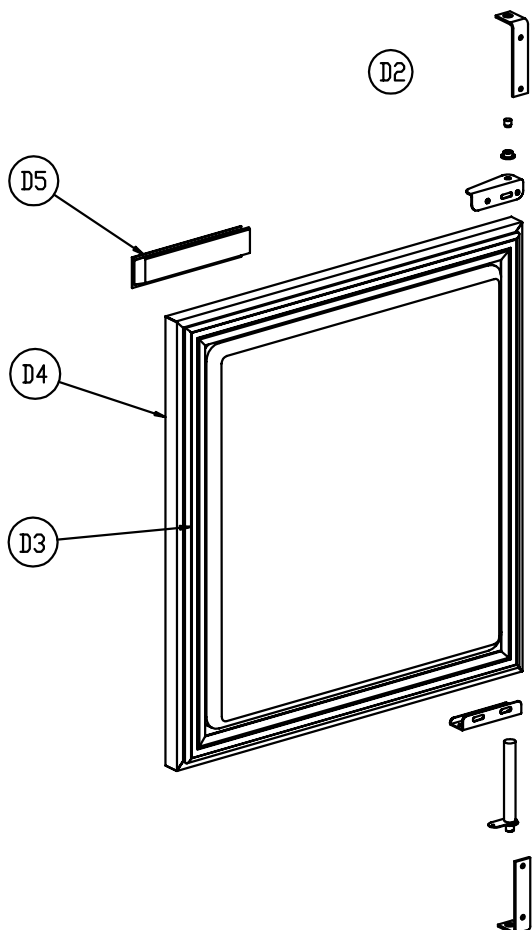


RIGHT HINGED DOOR

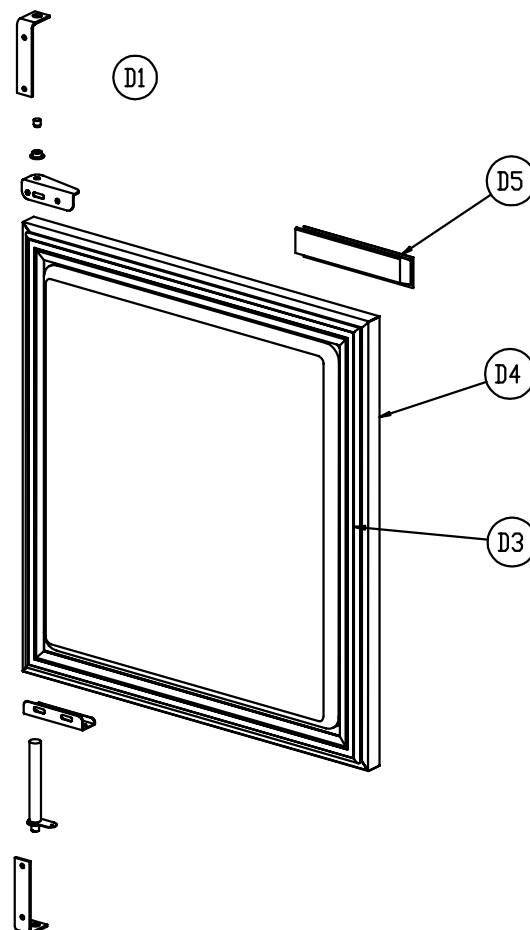


ITEM	SERVICE PART	DESCRIPTION	PT48-18W-L	PT60-24W-L	PT72-30W-L	PT84-36W-L
D1	RP HNG9901	HINGE ASSY, SELF CLOSING, RIGHT	X	X	X	X
D2	RP HNG9902	HINGE ASSY, SELF CLOSING, LEFT	X	X	X	X
D3	IN GSK1020	GASKET, PUSH-IN (LEFT/RIGHT DOORS)	X	--	--	X
D3	IN GSK9902	GASKET, PUSH-IN (LEFT/RIGHT DOORS)	--	X	--	--
D3	IN GSK1030	GASKET, PUSH-IN (LEFT/RIGHT DOORS)	--	X	X	X
D4	RP DOR101	DOOR - RIGHT - 18"	X	--	--	X
D4	RP DOR102	DOOR - LEFT - 18"	X	--	--	X
D4	RP DOR0209	DOOR - RIGHT - 21"	--	X	--	--
D4	RP DOR0208	DOOR - LEFT - 21"	--	X	--	--
D4	RP DOR105	DOOR - RIGHT - 27"	--	X	X	X
D4	RP DOR106	DOOR - LEFT - 27"	--	X	X	X
D5	HD HDL0103	HANDLE, BLACK PLASTIC	X	X	X	X

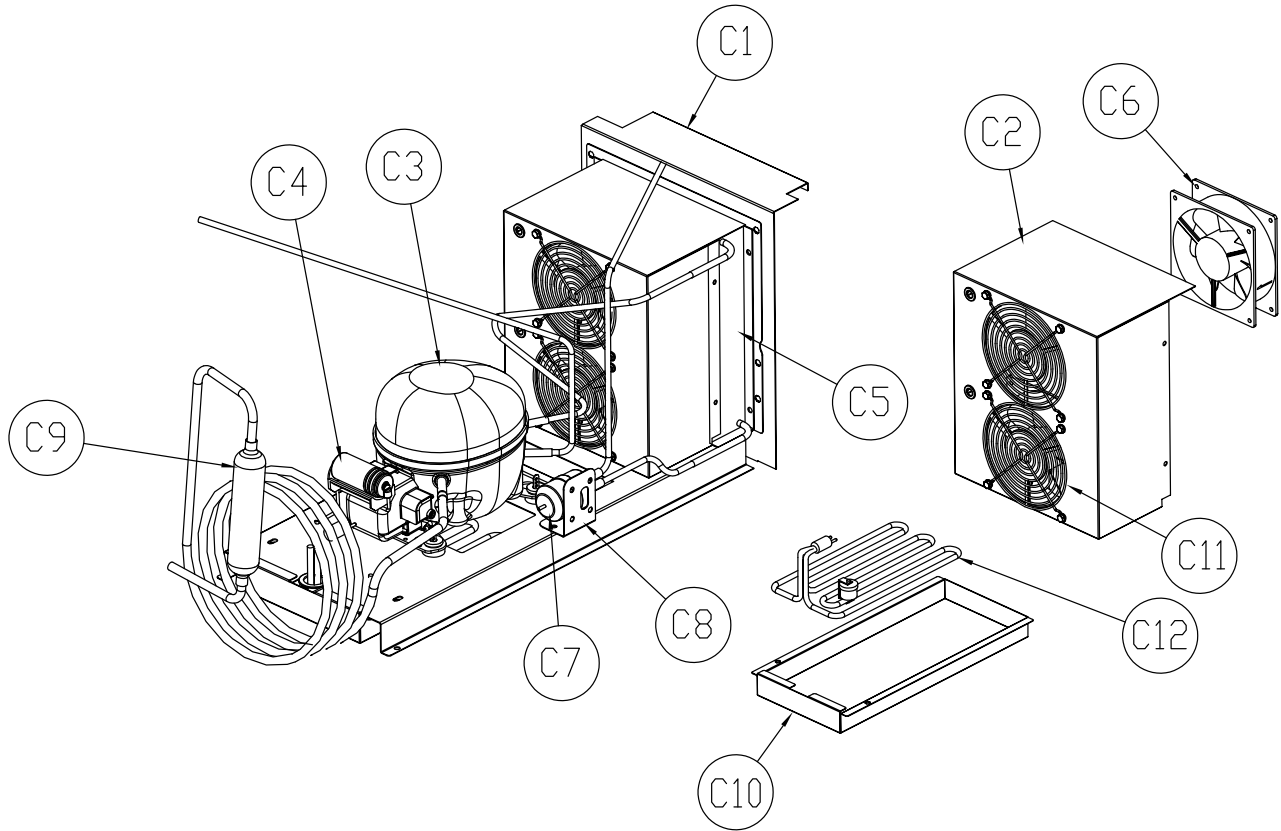


ITEM	SERVICE PART	DESCRIPTION	PT48-18W-L	PT60-24W-L	PT72-30W-L	PT84-36W-L
C1	RP SHD2101	CONDENSER SHROUD, LEFT, T07-2146	X	X	X	X
C2	RP SHD2102	FAN SHROUD, T07-2105	X	X	X	X
C3	RF CMP1801	COMPRESSOR, 1/5 HP R290 EMBRACO	X	--	--	--
C4	RF CMP1801SC	COMPRESSOR, 1/5 HP R290 EMBRACO START COMPONENTS	X	--	--	--
C3	RF CON1604	COMPRESSOR, 1/4 HP R290 EMBRACO	--	X	X	X
C4	RF CON1604SC	COMPRESSOR, 1/4 HP R290 EMBRACO START COMPONENTS	--	X	X	X
C5	RF COI1603	CONDENSER COIL	X	X	X	X
C6	RF FAN0601	FAN, AXIAL 127 X 38 MM	X	X	X	X
C7	RF FLT9902	DRYER	X	X	X	X
C8	RP BRK2106	DRYER BRACKET, T07-1167	X	X	X	X
C9	RF ACM1801	ACCUMULATOR	X	X	X	X
C10	RP DRP2101	DRIAN PAN, CMPR, PTXX-XW, T07-2147	X	X	X	X
C11	HD GRD1610	FAN GUARD, NICK CHROME 127MM RND	X	X	X	X
C12	EL WIR274	CONDENATE PAN HEATER, 200WATT	X	X	X	X

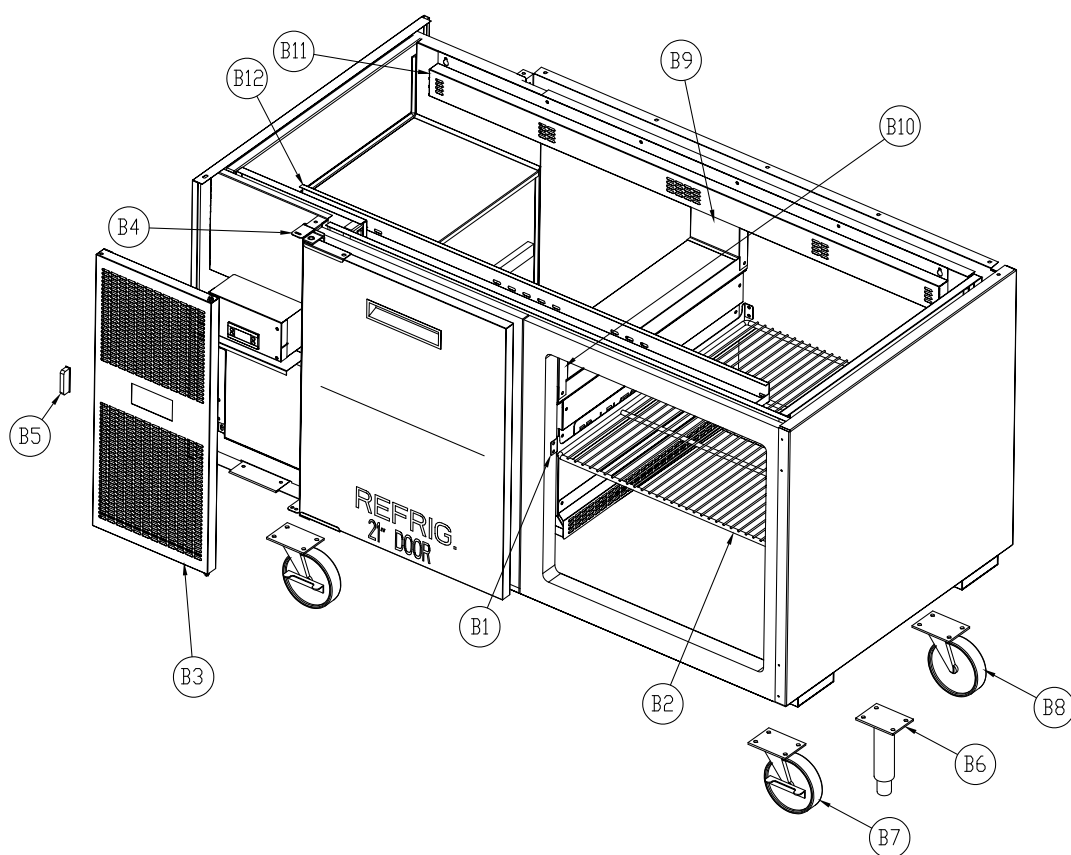

ITEM	SERVICE PART	DESCRIPTION	PT48-18W-L	PT60-24W-L	PT72-30W-L	PT84-36W-L
B1	RP SPT2101L	SHELF SUPPORT LEFT OF DOOR, INTERIOR, T07-2139	X	X	X	X
B1	RP SPT2101R	SHELF SUPPORT RIGHT OF DOOR, INTERIOR, T07-2141 (NOT SHOWN)	X	X	X	X
B2	HD SHL9912	WIRE SHELF, 16 1/8" X 25 1/4"	--	X	--	--
B2	HD SHL015	WIRE SHELF, 13 1/8" X 25 1/4"	X	--	--	X
B2	HD SHL105	WIRE SHELF, 22" X 25 1/4"	--	X	X	X
B3	RP LVR2105	COMPRESSOR LOUVER, PTXX-XW, R290, T07-2137	X	X	X	X
B4	RP HNG2101	HINGED LOUVER MOUNTING BRACKET, T07-2124	X	X	X	X
B5	HD CTH9901	CATCH, MAGNETIC SOUTHCO 02-10-201-10	X	X	X	X
B6	HD LEG9902	BULLET LEG (OPTION)	X	X	X	X
B7	HD CST060	LOCKING CASTER (STANDARD)	X	X	X	X
B8	HD CST061	NON-LOCKING CASTER (STANDARD)	X	X	X	X
B9	RP DCT2101	VERTICAL AIR DUCT, REAR, T07-2126	X	X	X	X
B10	RP DCT2102	VERTICAL AIR DUCT, FRONT, T07-2138	X	X	X	X
B11	RP DCT2103	HORIZ AIR DUCT, REAR, T07-2055	X	--	--	--
B11	RP DCT2104	HORIZ AIR DUCT, REAR, T07-2072	--	X	--	--
B11	RP DCT2105	HORIZ AIR DUCT, REAR, T07-2087	--	--	X	--
B11	RP DCT2106	HORIZ AIR DUCT, REAR, T07-2145	--	--	--	X
B12	RP DCT2107	HORIZ AIR DUCT, FRONT, T07-2056	X	--	--	--
B12	RP DCT2108	HORIZ AIR DUCT, FRONT, T07-2073	--	X	--	--
B12	RP DCT2109	HORIZ AIR DUCT, FRONT, T07-2088	--	--	X	--
B12	RP DCT2110	HORIZ AIR DUCT, FRONT, T07-2144	--	--	--	X
B12	RP BCK2106	SS BACK PANEL, 48"; T07-1800A03 (NOT SHOWN)	X	--	--	--
B12	RP BCK2107	SS BACK PANEL, 60"; T07-1800B03 (NOT SHOWN)	--	X	--	--
B12	RP BCK2108	SS BACK PANEL, 72"; T07-1800C03 (NOT SHOWN)	--	--	X	--
B12	RP BCK2109	SS BACK PANEL, 84"; T07-1800D03 (NOT SHOWN)	--	--	--	X

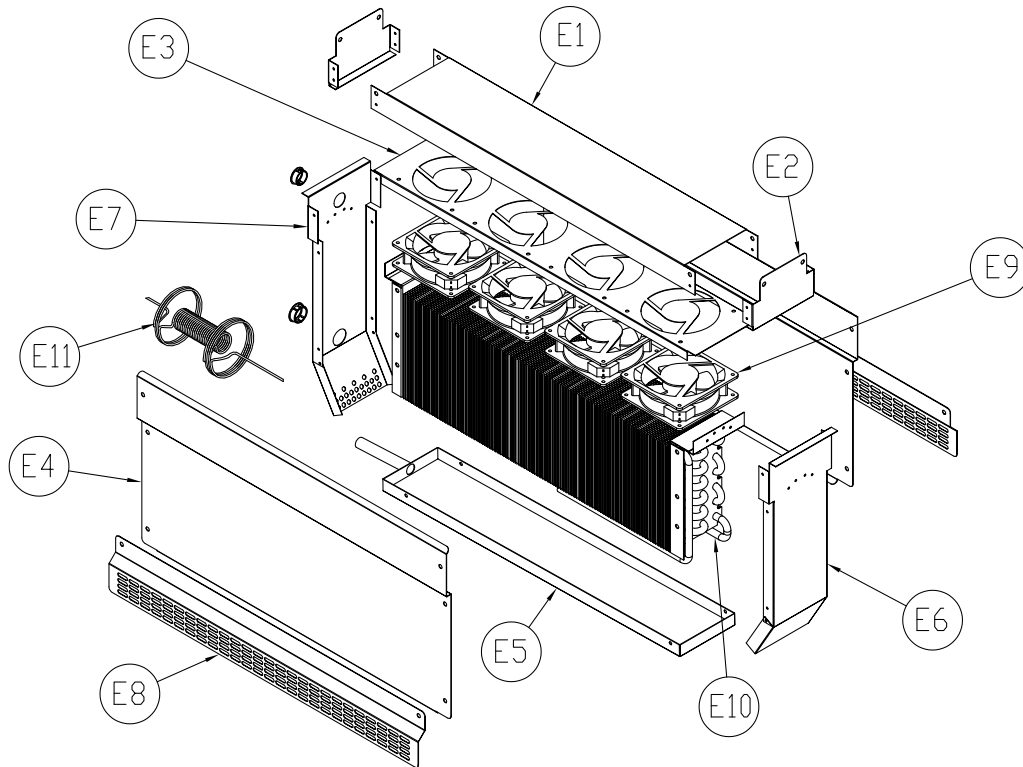

ITEM	SERVICE PART	DESCRIPTION	PT48-18W-L	PT60-24W-L	PT72-30W-L	PT84-36W-L
E1	RP GRD2101	EVAP TOP SUPPORT CHANNEL - T07-2140	X	X	X	X
E2	RP GRD2102	EVAP TOP MOUNTING BRACKETS - T07-2142	X	X	X	X
E3	RP SHD2103	EVAP FAN SHROUD, FOUR FAN, T07-2143	--	X	X	X
E3	RP SHD2104	EVAP FAN SHROUD, SINGLE FAN, T07-2057	X	--	--	--
E4	RP CVR2102	EVAP HOUSING COVER, T07-2116	X	X	X	X
E5	RP DRP2102	EVAP HOUSING DRAIN PAN, T07-2121	X	X	X	X
E6	RP FRT2102	EVAP HOUSING FRONT, T07-2120	X	X	X	X
E7	RP BCK2105	EVAP HOUSING REAR, T07-2123	X	X	X	X
E8	RP GRD2103	GUARD, COIL DRAIN PAN, T07-2115	X	X	X	X
E9	RF FAN1401	FAN, AXIAL 119MM X 38MM	X	X	X	X
E10	RF COI125	EVAPORATOR COIL	X	X	X	X
E11	RP CAP2104	CAP TUBE, T07-2159	X	X	X	X
E11	RF CNT2104	QTIP68-90F-120, 120" BLUE THERMISTOR 10K OHM Q-CURVE BETA 3435 (NOT SHOWN)	X	X	X	X
E11	RF CNT2103	QTIP68B-90F-120, 120" BLACK THERMISTOR 10K OHM Q-CURVE BETA 3435 (NOT SHOWN)	X	X	X	X

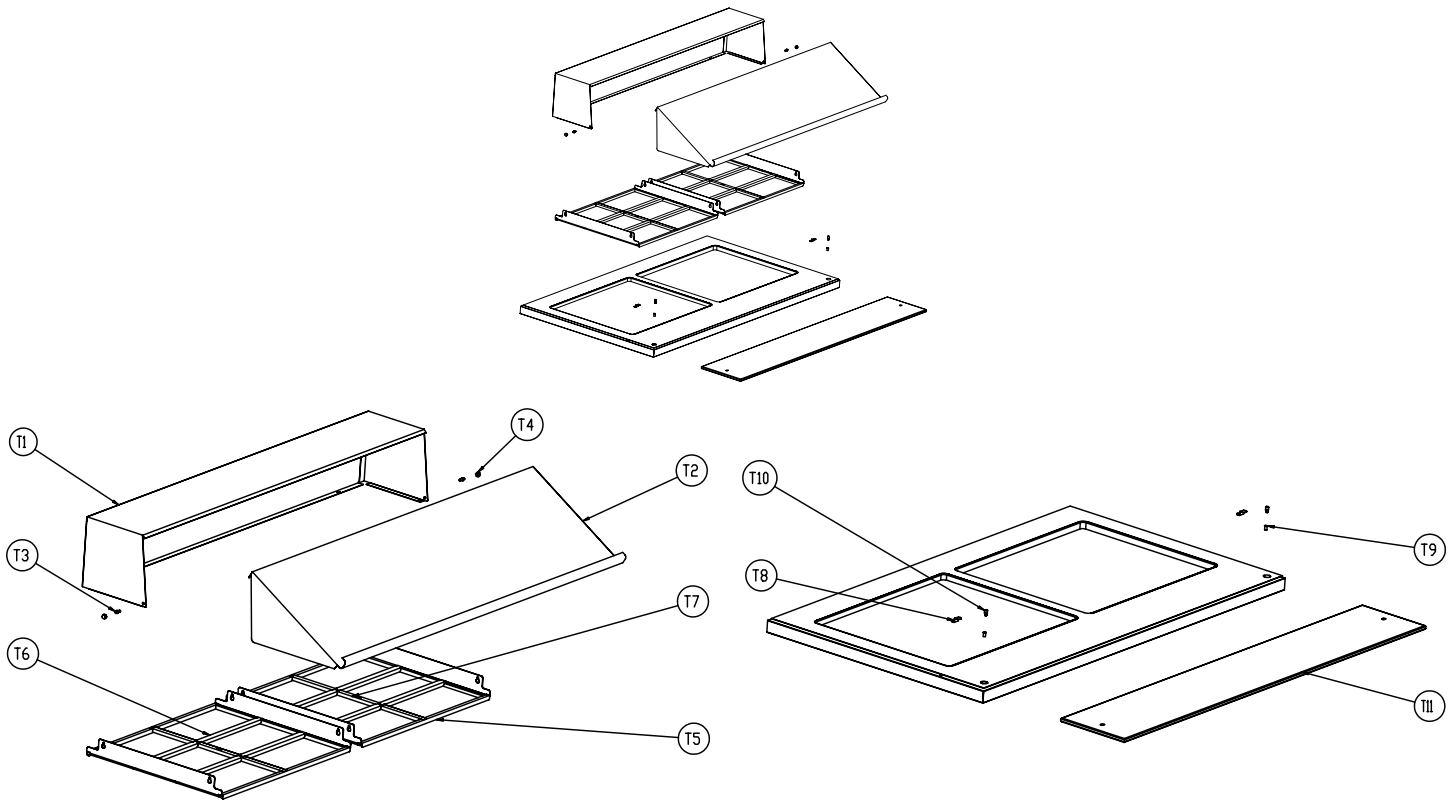


ITEM	SERVICE PART	DESCRIPTION	PT48-18W-L	PT60-24W-L	PT72-30W-L	PT84-36W-L
T1	RP COV2101	PT48-18W ROLLCOVER ASSEMBLY, RQ ROLLPT48-18W	X	--	--	--
T1	RP COV2102	PT60-24W ROLLCOVER ASSEMBLY, RQ ROLLPT60-24W	--	X	--	--
T1	RP COV2103	PT72-30W ROLLCOVER ASSEMBLY, RQ ROLLPT72-30W	--	--	X	--
T1	RP COV2104	PT84-36W ROLLCOVER ASSEMBLY, RQ ROLLPT84-36W	--	--	--	X
T2	RP ROL2101	ROLL COVER FRONT ONLY, PT48-18W, T07-2053	X	--	--	--
T2	RP ROL2102	ROLL COVER FRONT ONLY, PT60-24W, T07-2068	--	X	--	--
T2	RP ROL2103	ROLL COVER FRONT ONLY, PT72-30W, T07-2083	--	--	X	--
T2	RP ROL2104	ROLL COVER FRONT ONLY, PT84-36W, T07-2103	--	--	--	X
T3	HD PIN0101	ROLL COVER PIVOT PIN, .875" X 1/4-20	X	X	X	X
T4	FA NUT0403SS	NUT, PIVOT PIN 1/4-20 CAP NUT	X	X	X	X
T5	RP BAR1204	PAN SUPPORT, 12 PAN OPENING, FRONT & BACK, 25.8", T07-0087	--	X	X	--
T5	RP BAR1306	PAN SUPPORT, 18 PAN OPENING, BACK, 38.75", T07-0088	X	--	X	X
T5	RP BRK1504	PAN SUPPORT, LEFT, T07-0085	X	X	X	X
T5	RP BRK1505	PAN SUPPORT, RIGHT, T07-0086	X	X	X	X
T5	RP BAR2107	PAN SUPPORT, 18 PAN OPENING, FRONT, 38.75", T07-2161	X	--	X	X
T6	RP BAR069	ADAPTER BAR, 12" LOCKING	X	X	X	X
T7	RP BAR07K	ADAPTER BAR, 20"	X	X	X	X
T8	RP CLP001	CLIP, CUTTING BOARD, SET OF 2	X	X	X	X
T9	FA NUT0130	NUTSERT, 10/24 ALUM.	X	X	X	X
T10	HD PIN2030	PIN, CUTTING BOARD	X	X	X	X
T11	RP CPH1048	POLY CUTTING BOARD, 10" X 48" X .375"	X	--	--	--
T11	RP RCH1048	RICHLITE CUTTING BOARD, 10" X 48" X .5"	X	--	--	--
T11	RP CPH1060	POLY CUTTING BOARD, 10" X 60" X .375"	--	X	--	--
T11	RP RCH1060	RICHLITE CUTTING BOARD, 10" X 60" X .5"	--	X	--	--
T11	RP CPH1072	POLY CUTTING BOARD, 10" X 72" X .375"	--	--	X	--
T11	RP CRH1072	RICHLITE CUTTING BOARD, 10" X 72" X .5"	--	--	X	--
T11	RP CPH1084	POLY CUTTING BOARD, 10" X 84" X .375"	--	--	--	X
T11	RP CRH1084	RICHLITE CUTTING BOARD, 10" X 84" X .5"	--	--	--	X

CONTROL RF CNT2101



Electrical Schematic

SR BOX1905 / RP BOX2102 / RP CVR2103

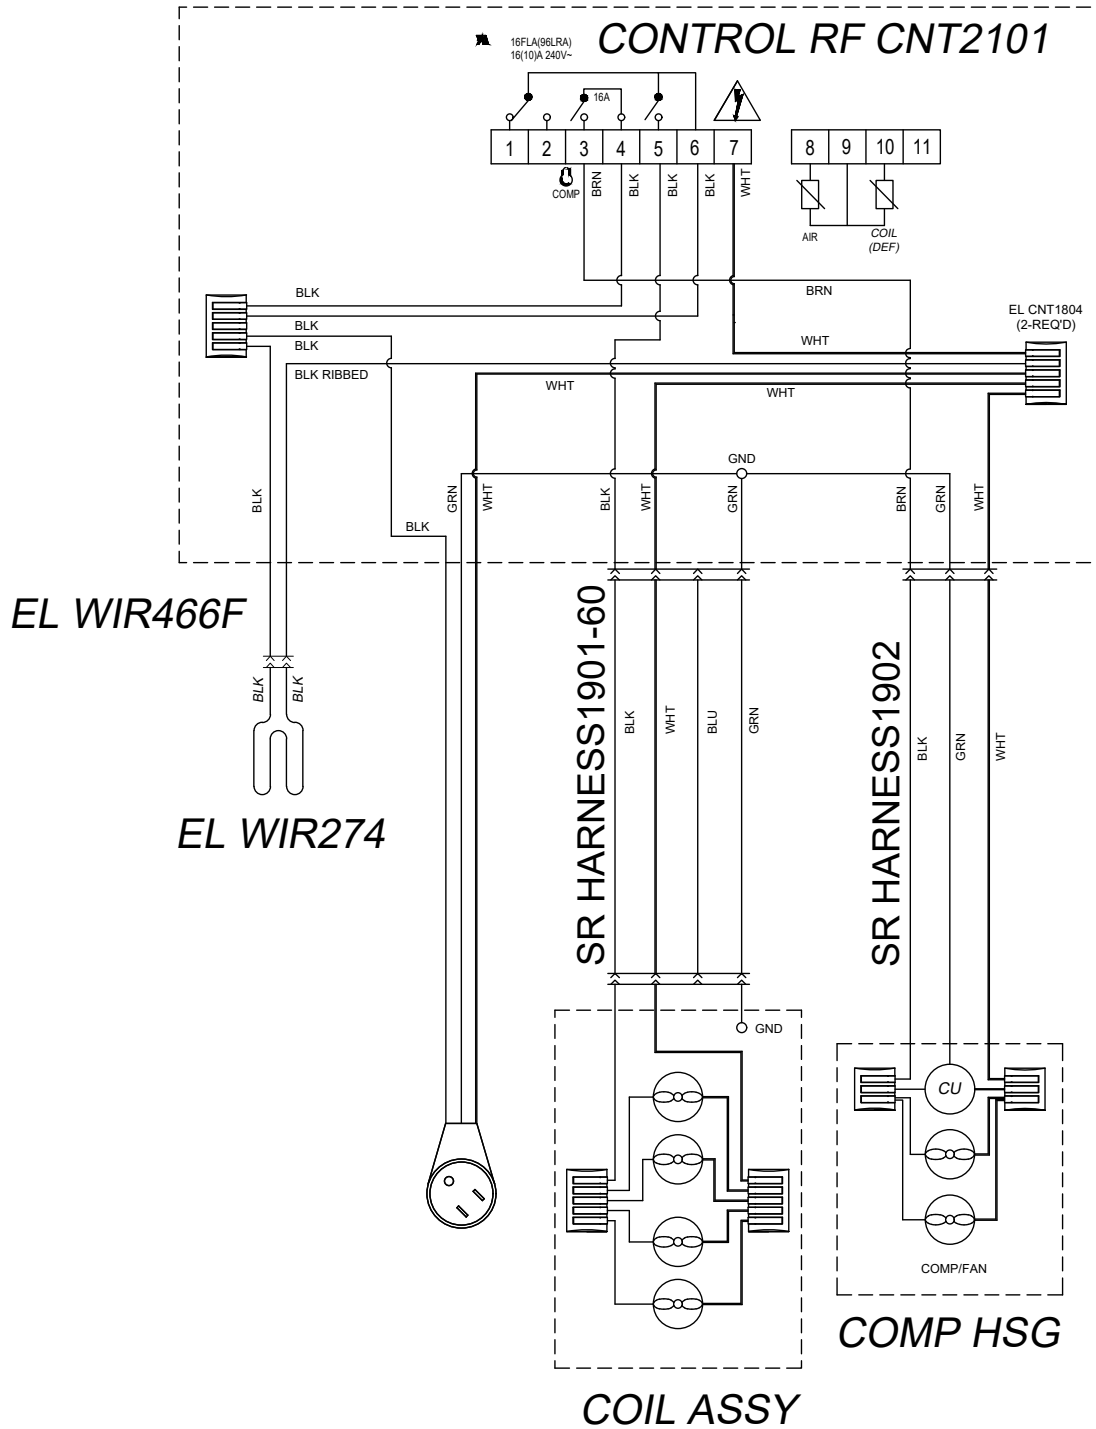

Service Log

Model No:	Purchased From:
Serial No:	Location:
Date Purchased:	Date Installed:
Purchase Order No:	For Service Call:

[illegible]