

USER MANUAL



Asinking Waterproof Car Roof Bag Top Carrier


! WARNINGS

- ▶ Check that there is no debris and the roof is clean.
- ▶ Do not overload cargo bag.
- ▶ Be sure to check all straps for tightness at regular intervals during travel.
- ▶ Always face the side with logo towards the FRONT of the vehicle.
- ▶ Avoid removing bag from roof while fully loaded.
- ▶ For cleaning, a damp sponge works best using only water with a mild detergent which contains no additives (such as alcohol, chlorine or ammonia). Allow to air dry completely.

TIPS FOR STRAPS

- ▶ LOOSE CREASES – Loose creases in the fabric flap in the wind, causing noise, lowering gas mileage and damaging the fabric (delamination). Use extra straps if necessary to hold down any loose creases.
- ▶ FIRM ATTACHMENT – Straps should be snug but not over-tight. Check snugness of straps during travel. Don't attach the straps to anything not intended to support heavy loads like a rain gutter, roof corner, roof edge, or open hooks.

- ▶ STRAP NOISE - If the free end of strap whistles or rumbles, fold them and fix with velcro, then there would be no flapping noise any more.

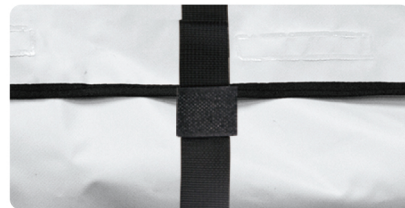

UNIVERSAL FIT FOR ANY VEHICLE


Both side rails and cross bars - use all eight straps.
Side rails only - use four straps on the driver side and on the passenger side.
Cross bars only - use four straps on the front and rear

We make sure that the products that you receive are what we describe in the website and meet your expectations, and that they work the way they are supposed to work.

If you have any questions about this bag, please feel free to contact us by Email
Asinking123@outlook.com

ROOF BAG INSTALLATION !


For better waterproof performance, please ALWAYS face the side with no zipper (with logo) towards the FRONT of the vehicle.

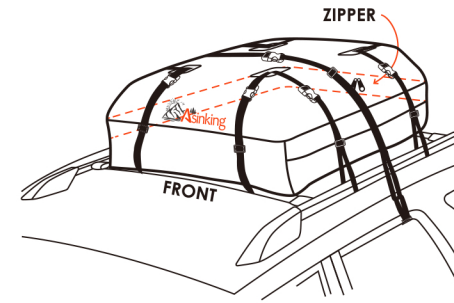

Select correct Bag position on your car's roof


CROSSBARS

All straps should be attached to the crossbars or towers

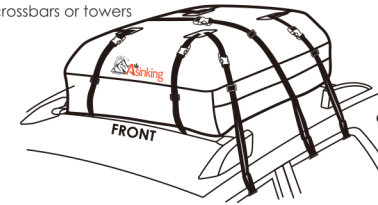


SIDE-RAILS

Straps attach to either side of the center post. Use the front/rear straps to tie knots with side straps.

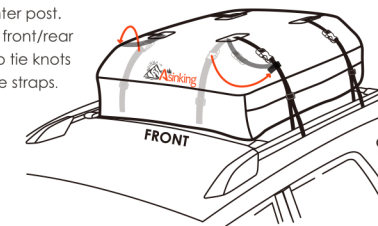

In a BASKET

Install front straps to front of basket, and rear straps to rear of basket.

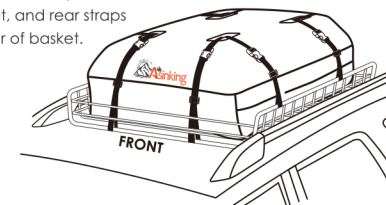

For installation on a naked roof

(installation on vehicle with no rack system).



Open your door and carefully pull back the weatherstripping seal.



With the seal pulled back, place included door hooks on the metal door frame.



Apply gentle force for better fit with anti-scratch pads and door frame, to avoid paint ruining.




Apply the same procedure to the other doors. These hooks will safely anchor the rooftop cargo bag.

For installation of the extra straps

With the extra straps, you can tight up better the bag following the installation steps above.




Extra straps

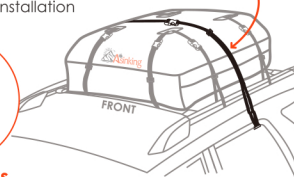

Please not tie the straps through the car windows which is dangerous for driving



How to avoid the strap noise

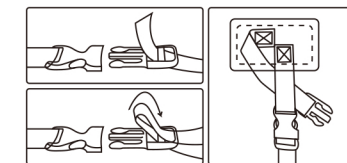

- ▶ Pull the strap ends to tighten the BAG to the racks.
- ▶ Tuck the end of the strap back into the buckle to prevent the strap from loosening.
- ▶ Secure strap ends with hook and loop fastener tabs.