


Fast guide

Using the Monitor

1. Key Function Description

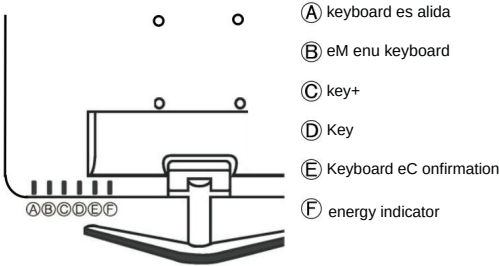


2. Operating Instructions

- 1. turns on automatically
- 2. Channel selection: press A key, press B key to select signal channel, then press E key to confirm, finally press A key to exit
- 3. Picture Effect Design: Press B key to enter menu, and press B key continuously to select different options, press C+ and D- key to adjust, then press E key to confirm, and finally press A key to go out

3. Basic Parameters

resolution	1920 ´ 1080
Backlight	LCD
aspect ratio	16:9/16:10
Brightness	450lux
Contrast	3000:1
input signal	HDMI VGA USB AV
Language	Chinese / English
Feeding	30
power frequency	AC220V/ 50Hz
long term work environment	0-30°

4. Interface Function Chart

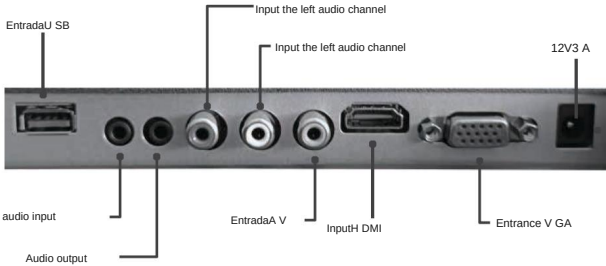



Mark "only for safe use in non-tropical climate"



It marks "only for safe use in areas below 2000m above sea level".

Warranty card

Username	
mail	
Address	
Postal Code	
Contact number	
Product name	
Model	
Serial number / Distributor	
Name	
Address	
Contact number	
Postal Code	
sale date	
Invoice sheet	





www.zkteco.com



www.zktecolatinoamerica.com



Copyright © 2020, ZKTeco CO., LTD. All rights reserved.
ZKTeco may, at any time and without prior notice, make changes or improvements to products and services or stop their production or marketing.
ZKTeco logo and brand are owned by ZKTeco CO., LTD.