


4 Channel Constant Voltage DALI LED Dimmer

Model No.: DA4

DT6/4 Address/4 Channel/Constant voltage/PWM dimming

Features

- 4 channel constant voltage DALI LED Dimmer.
- 4 DALI address, 4 channel work separately.
- DALI-2 certified, in accordance with DALI standard protocol IEC 62386-101, 102, 207 and in compliance with DALI products from other international incorporation.
- DALI address will be automatically assigned by DALI master.
- PWM digital dimming, standard DALI logarithmic dimming curve.
- Over-load / Short circuit protection, recover automatically.

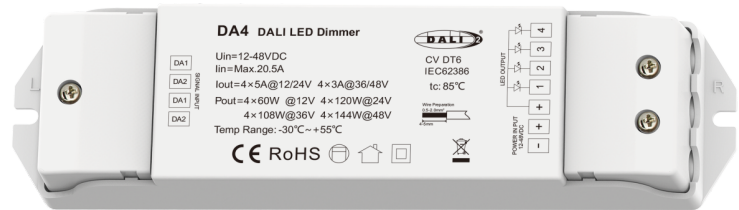


CE RoHS


Technical Parameters

Input and Output		Dimming data		Safety and EMC	
Input voltage	12-48VDC	Input signal	DALI	Safety standard(LVD)	EN 62368-1:2020+A11:2020
Input current	20.5A	Dimming range	0-100%	Certification	DALI-2,CE,LVD
Output voltage	12-48VDC	Dimming curve	Logarithmic	Warranty	
Output current	4x5A@12/24V 4x3A@36/48V	PWM Frequency	2000Hz (default)	Warranty	5 years
Output power	4 x 60W @12V 4x120W@24V 4 x 108W@36V 4x144W@48V	Package		Environment	
Output type	Constant voltage	Size	L178x W150 x H38mm	Operation temperature	Ta: -30°C ~ +55°C
		Gross weight	0.132kg	Case temperature (Max.)	Ta: +85°C

Mechanical Structures and Installations

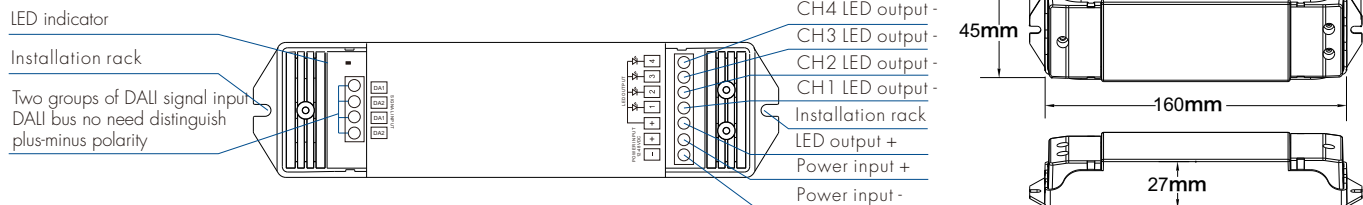

Wiring Diagram

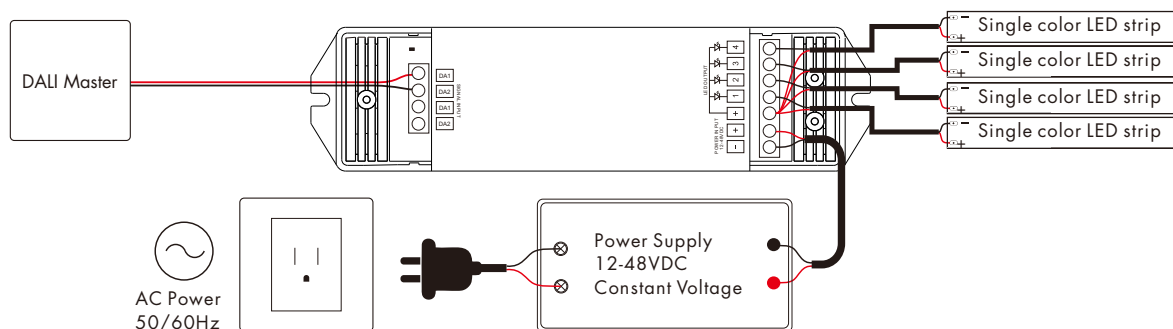

DALI control

This product is designed with 4 DALI address input and 4 channel output. DALI address is assigned by DALI Master controller automatically, please refer to user manuals of compatible DALI Masters for specific operations.

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

DALI 4路恒压LED调光器


景 晴 光 电
SKYDANCE

型号: DA4

DT6/4地址 / 4通道 / 恒压 / PWM调光

特点

- DALI 4通道恒压LED调光器, 每个通道5A。
- 4个DALI地址, 4个通道独立工作。
- DALI-2认证, 符合DALI标准协议IEC 62386-101、102、207, 兼容来自其他供应商的DALI产品。
- DALI地址由DALI主机自动分配。
- PWM数字调光, 标准DALI对数调光曲线。
- 过载/短路保护, 自动恢复。


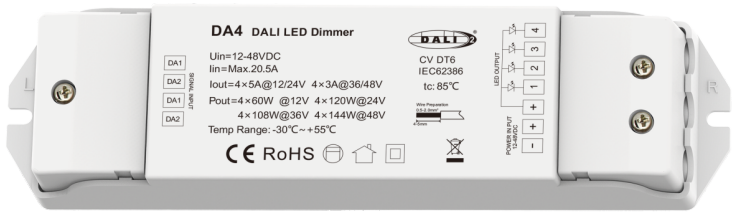


CE RoHS


技术参数

输入和输出		调光数据		安全和EMC	
输入电压	12-48VDC	输入信号	DALI	安全标准(LVD)	EN 62368-1:2020+A11:2020
输入电流	20.5A	调光范围	0-100%	认证	DALI-2, CE, LVD
输出电压	12-48VDC	调光曲线	对数	质保	
输出电流	4x5A@12/24V 4x3A@36/48V	PWM频率	2000Hz (默认)	质保	5年
输出功率	4 x 60W @12V 4x120W@24V 4 x 108W@36V 4x144W@48V	包装		环境	
输出类型	恒压	尺寸	178x150 x38mm(长x宽x高)	工作温度	Ta: -30℃ ~ +55℃
		总重量	0.132kg	外壳最高温度	Ta: +85℃

机械结构和安装

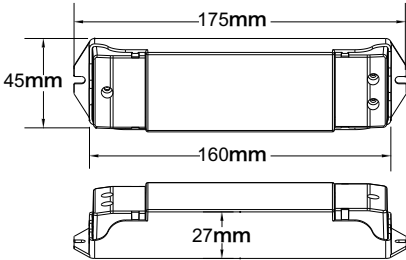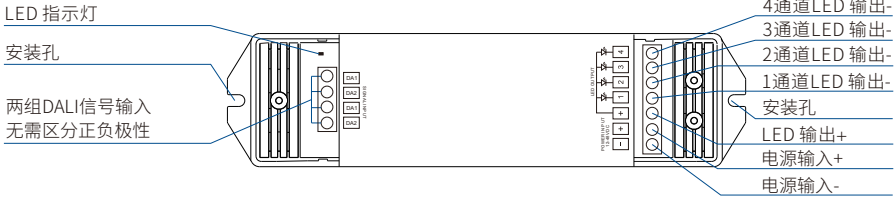

接线图

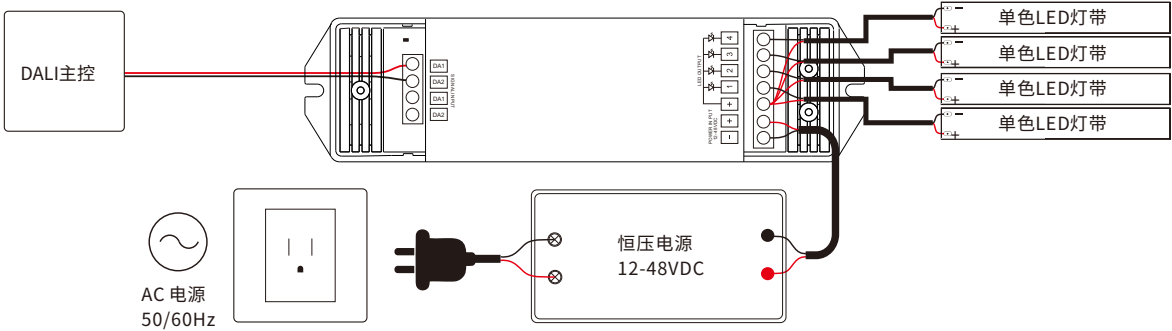

DALI控制

本产品采用4个DALI地址输入, 4个通道输出。
DALI地址可由DALI主控自动分配, 请参考DALI主控用户手册。

安全和警告

- 不要带电安装调光器。
- 不要将调光器安装在潮湿环境。

本资料上的内容均经过认真核对, 如有任何印刷错误或内容上的误解, 本公司保留最终解释权。
产品若有技术改进, 会编入新版说明书中, 恕不另行通知。

广州景晴光电科技有限公司 Guangzhou Skyacne Co., Ltd www.iskydance.cn